

Reallight

COMMERCIAL LIGHTS

2026/2027

LIGHTING

ReaLight

ROUND AND SQUARE LUMINARIES SERIES



ALTD0291B
P12



ALDD0291B
P12



ALTD0291H
P15



ALDD0291H
P15



ALTD0292
P17



ALDD0292
P17



ALTD0293
P18



ALDD0293
P18



ALTD0294
P19



ALDD0294
P19



ALTD80006B
P23



ALDG80006B
P23



ALDD80006B
P24



ALTD80006H
P26



ALDG80006H
P26



ALDD80006H
P27



ALTD0291D
P29



ALTD0291C
P29

SURFACE MOUNTED SERIES



ALXS0812H
P30



ALXS08210
P31




ALIP80210
P31



ALXS0812
P32




ALXS80106
P33



2ALXS3402
P34



ALXS80224
P35




ALXS80224
P36




ALBD80118
P37




ALIP80206
P38




ALIP80206*2
P38




ALXS0853A
P39



ALXS0853A*2
P39




ALXS0903W
P39



ALXS0903A
P39



ALIP80201
P40



ALXS0675A
P41



ALXS0685A
P41



ALIP0673A
P42



ALXS0833C
P43



ALXS0833D
P43



ALXS80043
P44

RECESSED SERIES



ALTH80011A-Y
P46



ALTH80011A-F
P46



ALTH80011A-F*2
P46



ALTH80012A-Y
P46



ALTH80012A-F
P46



ALTH80012A-F*2
P46



ALTH80013-2WF
P48



ALTH80013-9WF
P48



ALTH80013-9WY
P48



ALTH80013-10WF
P48



ALTH80015-F
P50



ALTH80014-Y
P50



ALTH80014-F
P50



ALTH0740A-Y
P51



ALTH0740A-F
P51



ALTH0740A-F*2
P51



ALTH80007A-Y
P52




ALTH80007A-F
P53



ALTH80007A-F*2
P53



ALTH0769A
P54



ALTH0769A
P54



ALIP80202
P56



ALIP80202*2
P56



ALIP80203
P58



ALIP80203*2
P58



ALTH80224
P59



ALTH80225
P60



ALTH80118
P61



ALTH80119
P62



ALTH0771A
P63

LIGHTING

ReaLight



ALTH0731A-Y
P64



ALTH0731A-F
P65



ALTH0731A-F*2
P65



ALTH0587A
P66



ALTH0741A-Y
P67



ALTH0741A-F
P67



ALIP0903A -Y
P68



ALIP0903A -F
P68



ALTH0909A
P70



ALIP0909A
P70



ALTH0909B
P70



ALIP0909B
P70



ALTH0909C-10W
P70



ALIP0909C-10W
P70



ALTH0909C-5W
P70



ALIP0909C-5W
P70



ALTH0750A
P71



ALTH80114
P71



ALTH80115
P72



ALTD80005
P74



ALIP80005
P74



ALTD80005A
P75



ALIP80005A
P75



ALTD0316
P76



ALTD0286A
P78



ALIP0286A
P78



ALTD0286G
P79



ALIP0286G
P79



ALTD0260B-Y
P80



ALIP0260B-Y
P80



ALTD0260B-F
P81



ALIP0260B-F
P81



ALTH0629A-5WY
P82



ALTH0629A-5WF
P82



ALTH0638A-5WY
P83



ALTH0638A-5WF
P83



ALTH0660A-5WY
P83



ALTH0660A-5WF
P83



ALTH0661A-5WY
P84



ALTH0661A-5WF
P84

SPOTLIGHT SERIES



ALTH0616B
P86



ALXS0616B
P86



ALXS0616A-GU10
P87



ALTH0616-GU10
P87



ALXS0616B-GU10
P87



ALTH0687A
P89



ALXS0687A
P89



ALXS0689A
P90



ALXS0689A*2
P90

TRACK LIGHT SERIES



ALGD0812
P91



ALGD80106
P92



ALGD80043
P92



ALGD0671A
P94



ALGD0765E
P94



ALGD0766E
P95



ALGD0687A
P95



ALGD0833C
P96



ALGD0833D
P96



ALGD80219
P97



ALGD9101A
P98



ALGD0616B
P99



ALGD0616-GU10
P87




ALGD80224
P100



ALGD80118
P100



ALGD80119
P101



ALGD80211
P101



2ALGD0001E
P102



2ALGD0001S
P102



2ALGD0002B
P103




2ALGD0002E
P104



2ALGD0002S
P104



2ALGD80053
P105



2ALGD80052
P105

LIGHTING

ReaLight



2ALGDX0005E
P106



2ALGDX0006E
P107



ALGD80107B
P108



ALGD80107
P109



ALGD80108
P109



ALGD0686B
P110



DECORATIVE SERIES




ALDD0686B
P110




ALTH80112
P111



ALDD80112
P111



ALDD80116
P112



ALDD80117
P112




ALDD80113
P113



ALDD80118
P114



ALDD0685A
P115



ALDD0580A
P116



ALXS0697A
P117



ALGD0697A
P117




ALXS0697A*2
P117



ALGD0697A*2
P117



ALDD0690A
P119



ALDD0691A
P119



ALDD0692A
P120



ALDD0693A
P120



ALDD0694A
P120



ALDD0695A
P120



ALDD0696A
P120

8-29	ROUND AND SQUARE LUMINARIES SERIES	
30-44	SURFACE MOUNTED SERIES	
45-84	RECESSED SERIES	
85-90	SPOTLIGHT SERIES	
91-110	TRACK LIGHT SERIES	
110-120	DECORATIVE SERIES	

0291 SERIES




ALTD0291B-30WY




ALTD0291B-40WY



ALTD0291B-50WY



ALTD0291B-60WY




ALTD0291B-80WY



ALTD0291B-100WY



ALTD0291B-120WY



ALDD0291B-30WY



ALDD0291B-40WY




ALDD0291B-50WY



ALDD0291B-60WY



ALDD0291B-80WY



ALDD0291B-100WY



ALDD0291B-120WY



ALTD0291H-30WY



ALTD0291H-40WY



ALTD0291H-50WY



ALTD0291H-60WY




ALTD0291H-80WY



ALTD0291H-100WY



ALTD0291H-120WY



ALDD0291H-30WY



ALDD0291H-40WY



ALDD0291H-50WY



ALDD0291H-60WY





ALDD0291H-80WY



ALDD0291H-100WY



ALDD0291H-120WY

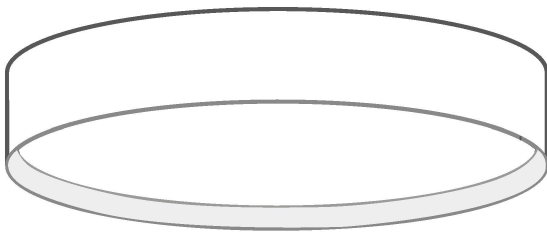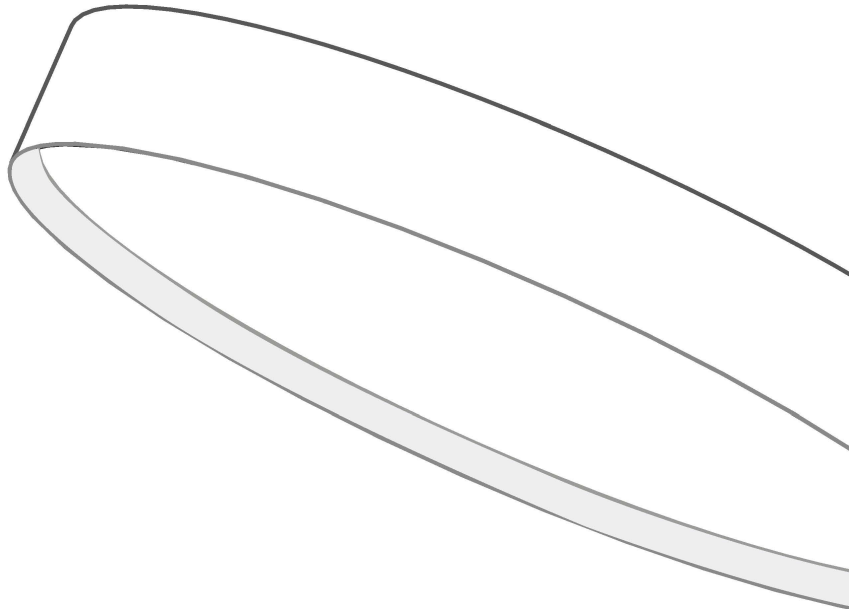




0291 SERIES



CCT 3000-5000K




DIM 10-100%



DIM 0-10V



DIM 0-100%





ON/OFF



DIM TRIAC



DIM 0-10V



DALI



TUYA



TUNABLE BY SWITCH

MICRO-PRISMATING
DIFFUSER(OPTIONAL)

ITEM CODE

ALTD0291B-30WY	●	●	●	●	●	●	●
ALTD0291B-40WY	●	●	●	●	●	●	●
ALTD0291B-50WY	●	●	●	●	●	●	●
ALTD0291B-60WY	●	●	●	●	●	●	●
ALTD0291B-80WY	●	●	●	●	●	●	●
ALTD0291B-100WY	●	●	●	●	●	●	●
ALTD0291B-120WY	●	●	●	●	●	●	●
ALDD0291B-30WY	●	●	●	●	●	●	●
ALDD0291B-40WY	●	●	●	●	●	●	●
ALDD0291B-50WY	●	●	●	●	●	●	●
ALDD0291B-60WY	●	●	●	●	●	●	●
ALDD0291B-80WY	●	●	●	●	●	●	●
ALDD0291B-100WY	●	●	●	●	●	●	●
ALDD0291B-120WY	●	●	●	●	●	●	●





ON/OFF

DIM TRIAC

DIM 0-10V



DALI



TUYA



TUNABLE BY SWITCH

MICRO-PRISMATIC
DIFFUSER(OPTIONAL)

ITEM CODE

ALTD0291H-30WY	●	●	●	●	●	●	●
ALTD0291H-40WY	●	●	●	●	●	●	●
ALTD0291H-50WY	●	●	●	●	●	●	●
ALTD0291H-60WY	●	●	●	●	●	●	●
ALTD0291H-80WY	●	●	●	●	●	●	●
ALTD0291H-100WY	●	●	●	●	●	●	●
ALTD0291H-120WY	●	●	●	●	●	●	●
ALDD0291H-30WY	●	●	●	●	●	●	●
ALDD0291H-40WY	●	●	●	●	●	●	●
ALDD0291H-50WY	●	●	●	●	●	●	●
ALDD0291H-60WY	●	●	●	●	●	●	●
ALDD0291H-80WY	●	●	●	●	●	●	●
ALDD0291H-100WY	●	●	●	●	●	●	●
ALDD0291H-120WY	●	●	●	●	●	●	●

0291B



ALTD0291B-30WY




ALTD0291B-40WY




ALTD0291B-60WY




ALTD0291B-50WY

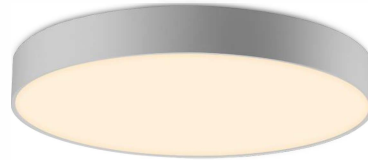

ALTD0291B-80WY

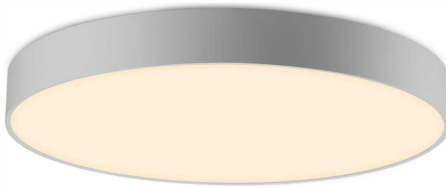

ALTD0291B-100WY

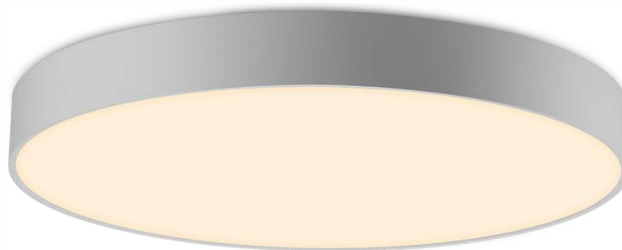

ALTD0291B-120WY

7





COLOR FINISHINGS:



Black

White



Black



White

0291B

ALTD0291B-30WY

POWER: 30W
CRI: 90
LUMEN: 2891Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°



ALTD0291B-80WY

POWER: 80W
CRI: 90
LUMEN: 9055Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°



ALTD0291B-40WY

POWER: 40W
CRI: 90
LUMEN: 3916Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°




ALTD0291B-100WY

POWER: 100W
CRI: 90
LUMEN: 11800Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1000*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°



9

ALTD0291B-50WY

POWER: 50W
CRI: 90
LUMEN: 5260Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø500*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°




ALTD0291B-120WY

POWER: 120W
CRI: 90
LUMEN: 13444Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1200*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°





ALTD0291B-60WY

POWER: 60W
CRI: 90
LUMEN: 6255Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




110°

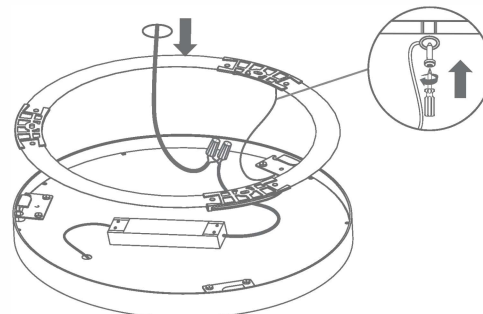

ALDD0291B-30WY


POWER: 30W
CRI: 90
LUMEN: 2891 lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°

ALDD0291B-30WY

POWER: 30W
CRI: 90
LUMEN: 3055Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°

ALDD0291B-40WY


POWER: 40W
CRI: 90
LUMEN: 3913Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°

ALDD0291B-100WY


POWER: 100W
CRI: 90
LUMEN: 11300Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1300*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°

ALDD0291B-50WY


POWER: 50W
CRI: 90
OUTPUT: 5260Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø500*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



110°

ALDD0291B-120WY


POWER: 120W
CRI: 90
OUTPUT: 13444Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1200*H79mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




110°

ALDD0291B-60WY


POWER: 60W
CRI: 90
OUTPUT: 6255Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




110°

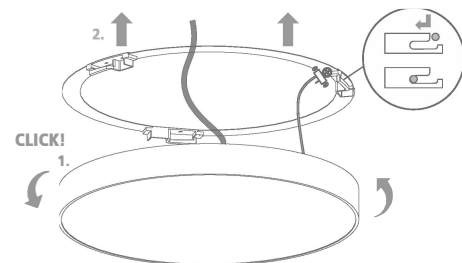

Surface mounted (ALDD0291B) + Suspended kits – Suspended (ALDD0291B)




APDX0003-Y
30W/40W/50W/60W common use



APDX0004-Y
80W/100W/120W common use


0291B

0291B-30W




ANGLE 110°


30W 110° 4000K

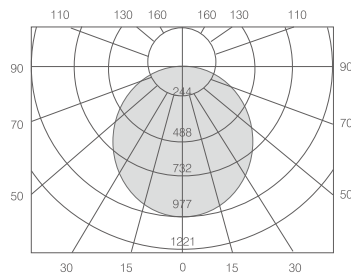

30W 110° 4000K

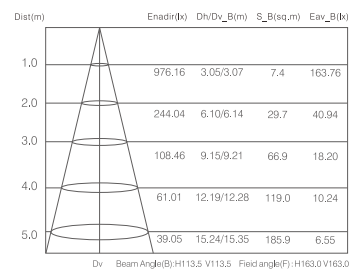


0291B-40W




ANGLE 110°


40W 110° 4000K

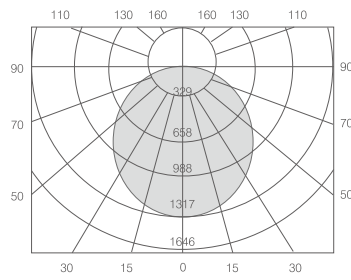

40W 110° 4000K

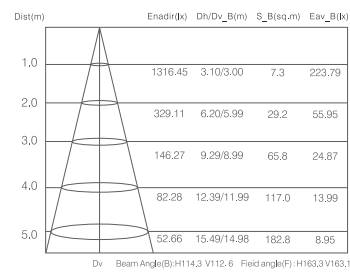


0291B-50W




ANGLE 110°


50W 110° 4000K

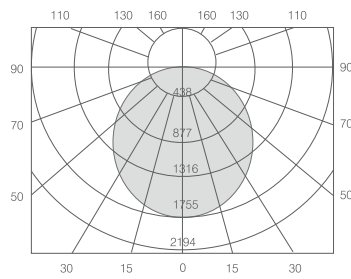

50W 110° 4000K

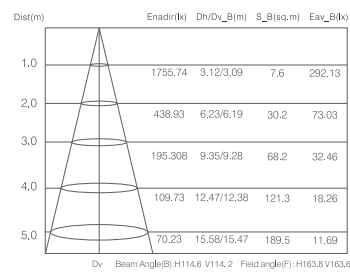


0291B-60W




ANGLE 110°


60W 110° 4000K

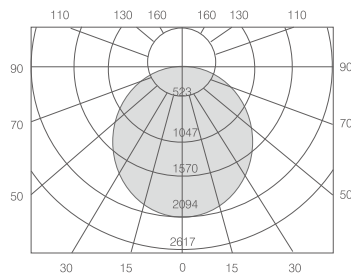

60W 110° 4000K

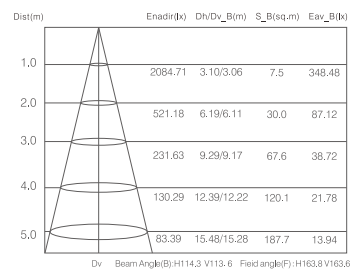


0291B-80W




ANGLE 110°


80W 110° 4000K

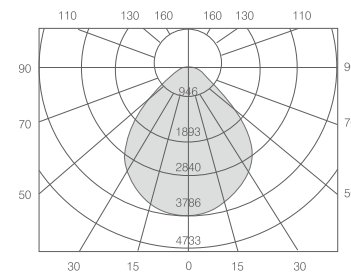

80W 110° 4000K

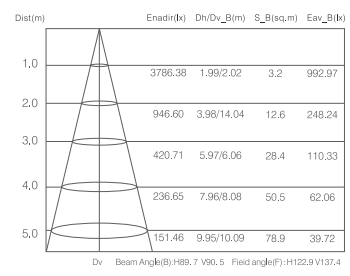


0291B-100W




ANGLE 110°

100W 110° 4000K

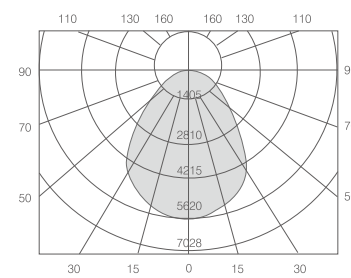



100W 110° 4000K

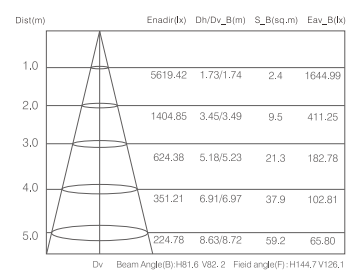

0291B-120W



ANGLE 110°

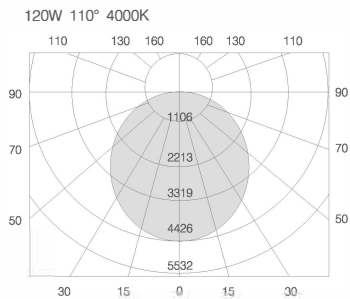

0291H




ALTD0291H-30WY




ALTD0291H-40WY




ALTD0291H-50WY




ALTD0291H-60WY

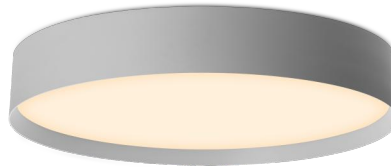

ALTD0291H-80WY

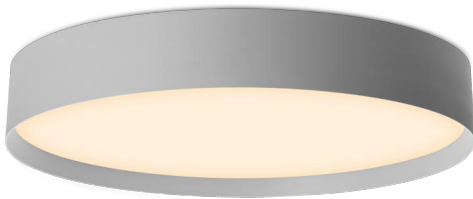

ALTD0291H-100WY

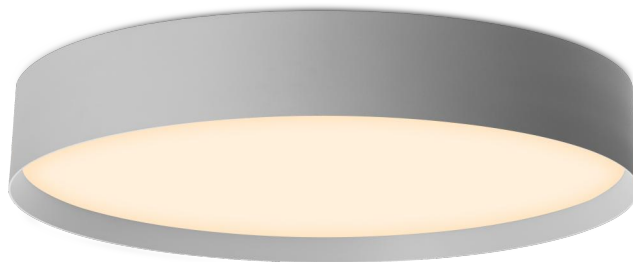

ALTD0291H-120WY





14

COLOR FINISHINGS:



0291H

ALTD0291H-30WY

POWER: 30W
CRI: 90
LUMEN: 2891Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALTD0291H-80WY

POWER: 80W
CRI: 90
LUMEN: 9055Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALTD0291H-40WY

POWER: 40W
CRI: 90
LUMEN: 3916Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°



ALTD0291H-100WY

POWER: 100W
CRI: 90
LUMEN: 11800Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1000*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




15

ALTD0291H-50WY

POWER: 50W
CRI: 90
LUMEN: 5260Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø500*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALTD0291H-120WY

POWER: 120W
CRI: 90
OUTPUT: 13444Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1200*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°





ALTD0291H-60WY

POWER: 60W
CRI: 90
OUTPUT: 6255Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°

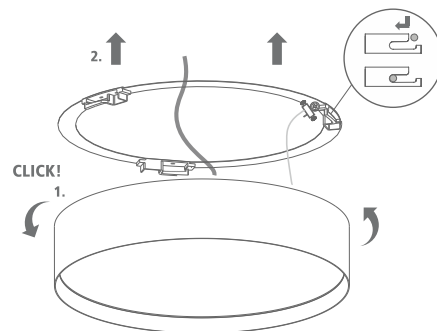


ALDD0291H-30WY

POWER: 30W
CRI: 90
LUMEN: 2891Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALDD0291H-80WY

POWER: 80W
CRI: 90
LUMEN: 9055Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°



ALDD0291H-40WY

POWER: 40W
CRI: 90
LUMEN: 3916Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALDD0291H-100WY

POWER: 100W
CRI: 90
LUMEN: 11800Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1000*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALDD0291H-50WY

POWER: 50W
CRI: 90
OUTPUT: 5260Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø500*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°




ALDD0291H-120WY

POWER: 120W
CRI: 90
OUTPUT: 13444Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1200*H95mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°





ALDD0291H-60WY


POWER: 60W
CRI: 90
OUTPUT: 6255Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H85mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



110°

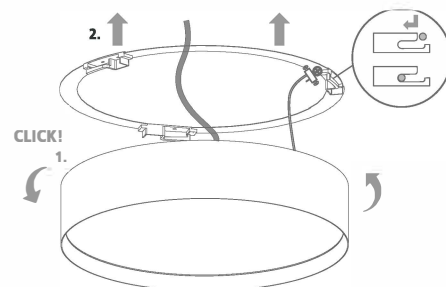


Surface mounted (ALDD0291H) + Suspended kits – Suspended (ALDD0291H)



APDX0003-Y

30W/40W/50W/60W common use



APDX0004-Y

80W/100W/120W common use


0291H

0291H-30W



ANGLE 110°

30W 110° 4000K

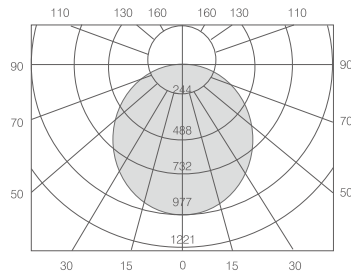


30W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	976.16	3.05/3.07	7.4	163.76
2.0	244.04	6.10/6.14	29.7	40.94
3.0	108.46	9.15/9.21	66.9	18.20
4.0	61.01	12.19/12.28	119.0	10.24
5.0	39.05	15.24/15.35	185.9	6.55


Dv Beam Angle(B): H113.5 V113.5 Field angle(F): H163.0 V163.0

0291H-40W



ANGLE 110°

40W 110° 4000K

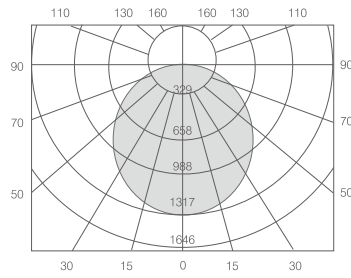


40W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	1316.45	3.10/3.00	7.3	223.79
2.0	329.11	6.20/5.99	29.2	55.95
3.0	146.27	9.29/8.99	65.8	24.87
4.0	82.28	12.39/11.99	117.0	13.99
5.0	52.66	15.49/14.98	182.8	8.95


Dv Beam Angle(B): H114.3 V112.6 Field angle(F): H163.3 V163.1

0291H-50W



ANGLE 110°

50W 110° 4000K

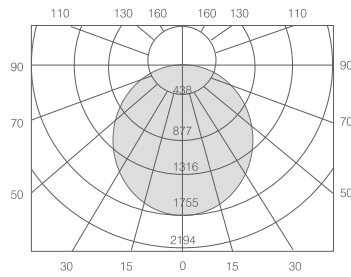


50W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	1755.74	3.12/3.09	7.6	292.13
2.0	438.93	6.23/6.19	30.2	73.03
3.0	195.308	9.35/9.28	68.2	32.46
4.0	109.73	12.47/12.38	121.3	18.26
5.0	70.23	15.58/15.47	189.5	11.69


Dv Beam Angle(B): H114.6 V114.2 Field angle(F): H163.8 V163.6

0291H-60W



ANGLE 110°

60W 110° 4000K

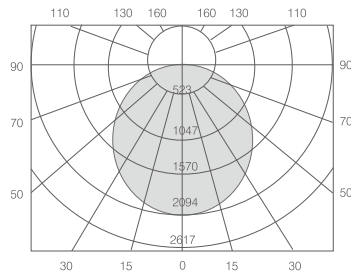


60W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	2084.71	3.10/3.06	7.5	348.48
2.0	521.18	6.19/6.11	30.0	87.12
3.0	231.63	9.29/9.17	67.6	38.72
4.0	130.29	12.39/12.22	120.1	21.78
5.0	83.39	15.48/15.28	167.7	13.94


Dv Beam Angle(B): H114.3 V113.6 Field angle(F): H163.8 V163.6

0291H-80W



ANGLE 110°

80W 110° 4000K

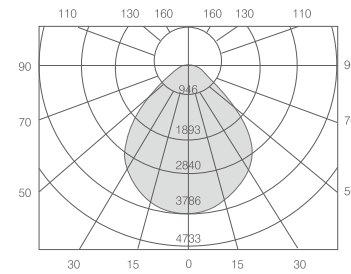


80W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	3786.38	1.99/2.02	3.2	992.97
2.0	946.60	3.98/4.04	12.6	248.24
3.0	420.71	5.97/6.06	28.4	110.33
4.0	236.65	7.96/8.08	50.5	62.06
5.0	151.46	9.95/10.09	78.9	39.72


Dv Beam Angle(B): H89.7 V90.5 Field angle(F): H122.9 V137.4

0291H-100W



ANGLE 110°

100W 110° 4000K

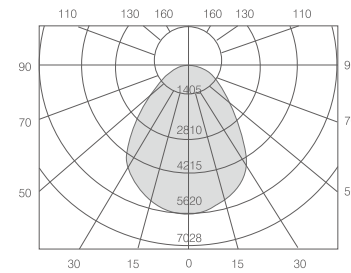

100W 110° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(k)
1.0	5619.42	1.73/1.74	2.4	1644.99
2.0	1404.85	3.45/3.49	9.5	411.25
3.0	624.38	5.18/5.23	21.3	182.78
4.0	351.21	6.91/6.97	37.9	102.81
5.0	224.78	8.63/8.72	59.2	65.80

Dv Beam Angle(B): H81.6 V82.2 Field angle(F): H144.7 V128.1

0291H-120W



ANGLE 110°

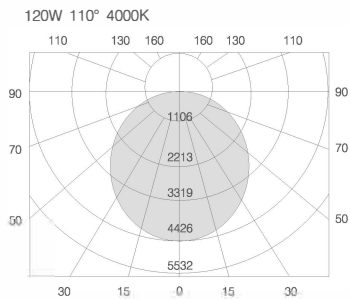

120W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4381.07	3.06/3.06	7.5	702.73
2.0	1095.27	6.13/6.11	30.0	175.68
3.0	486.79	9.19/9.17	67.6	78.08
4.0	273.82	12.25/12.22	120.2	43.92
5.0	175.24	15.32/15.28	187.8	28.11

Dv Beam Angle 110.7 V113.8 Field angle 110.2 V163.0



ALTD0292




40W



60W


ALTD0292-40W

POWER: 40W
CRI: ≥95 (4000K)
CCT: 1800K-12000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H76mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



ALTD0292-60W

POWER: 60W
CRI: ≥95 (4000K)
CCT: 1800K-12000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H76mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND



ON/OFF

OTHER VERSIONS



Bluetooth MESH



COLOR FINISHINGS:



Black



White



Gold



Orange






40W



60W


ALDD0292-40W

POWER: 40W
CRI: ≥ 95 (4000K)
CCT: 1800K-12000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: $\varnothing 400 \times H76$ mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



ALDD0292-60W

POWER: 60W
CRI: ≥ 95 (4000K)
CCT: 1800K-12000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: $\varnothing 600 \times H76$ mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND



ON/OFF

OTHER VERSIONS



Bluetooth MESH



COLOR FINISHINGS:



Black

White

Gold

Orange



ALTD0293




40W



60W

ALTD0293-40W

POWER: 40W
CRI: 90
LUMEN: 3916Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALTD0293-60W

POWER: 60W
CRI: 90
LUMEN: 6255Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND OTHER VERSIONS



ON/OFF



DIM 0-10V



DALI

COLOR FINISHINGS:



Black



White



Gold



Orange






40W



60W

ALDD0293-40W

POWER: 40W
CRI: 90
LUMEN: 3916lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

ALDD0293-60W

POWER: 60W
CRI: 90
LUMEN: 6255lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/
Gold/Orange



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM 0-10V



DALI

COLOR FINISHINGS:



Black

White

Gold

Orange



ALTD0294




40W



60W

ALTD0294-40W

POWER: 40W
CRI: 90
LUMEN: 3240Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
/Black+Gold/White+Gold



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALTD0294-60W

POWER: 60W
CRI: 90
LUMEN: 5896Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
/Black+Gold/White+Gold



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM 0-10V



DALI

COLOR FINISHINGS:



Black



Black+Gold



White



White+Gold






40W



60W

ALDD0294-40W

POWER: 40W
CRI: 90
LUMEN: 3240Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
/Black+Gold/White+Gold



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

ALDD0294-60W

POWER: 60W
CRI: 90
LUMEN: 5896Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H76mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White
/Black+Gold/White+Gold



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM 0-10V



DALI

COLOR FINISHINGS:



Black

Black+Gold

White

White+Gold



80006 SERIES



ALTD80006B-30W



ALTD80006B-40W



ALTD80006B-50W



ALTD80006B-60W



ALDG80006B-30W



ALDG80006B-40W



ALDD80006B-30W



ALDD80006B-40W



ALDD80006B-50W



ALDD80006B-60W



ALTD80006H-30W



ALTD80006H-40W



ALTD80006H-50W



ALTD80006H-60W



ALDG80006H-30W



ALDG80006H-40W



ALDD80006H-30W




ALDD80006H-40W



ALDD80006H-50W



ALDD80006H-60W

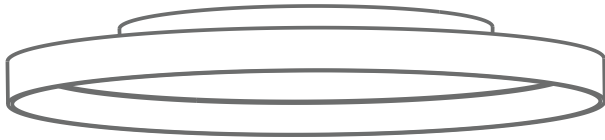

80006B



ON/OFF



DIM TRIAC



DIM 0-10V



DALI



TUYA



TUNABLE BY SWITCH



DIFFUSER(OPAL)

ITEM CODE								
	ALTD80006B-30W	●	●	●	●	●	●	●
	ALTD80006B-40W	●	●	●	●	●	●	●
	ALTD80006B-50W	●	●	●	●	●	●	●
	ALTD80006B-60W	●	●	●	●	●	●	●
	ALDG80006B-30W	●	●	●	●	●	●	●
	ALDG80006B-40W	●	●	●	●	●	●	●
	ALDD80006B-30W	●	●	●	●	●	●	
	ALDD80006B-40W	●	●	●	●	●	●	
	ALDD80006B-50W	●	●	●	●	●	●	
	ALDD80006B-60W	●	●	●	●	●	●	


ON/OFF


DIM TRIAC


DIM 0-10V


DALI


TUYA


TUNABLE BY SWITCH


DIFFUSER(OPAL)

ITEM CODE								
	ALTD80006H-30W	●	●	●	●	●	●	●
	ALTD80006H-40W	●	●	●	●	●	●	●
	ALTD80006H-50W	●	●	●	●	●	●	●
	ALTD80006H-60W	●	●	●	●	●	●	●
	ALDG80006H-30W	●	●	●	●	●	●	●
	ALDG80006H-40W	●	●	●	●	●	●	●
	ALDD80006H-30W	●	●	●	●	●	●	
	ALDD80006H-40W	●	●	●	●	●	●	
	ALDD80006H-50W	●	●	●	●	●	●	
	ALDD80006H-60W	●	●	●	●	●	●	

80006B



ALTD80006B-30W



ALTD80006B-40W



ALTD80006B-50W



ALTD80006B-60W



ALDG80006B-30W



ALDG80006B-40W




COLOR FINISHINGS:



80006B

ALTD80006B-30W


POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H45mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



80°

ALTD80006B-60W


POWER: 60W
CRI: 90
LUMEN: 5696Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H48mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



80°

ALTD80006B-40W


POWER: 40W
CRI: 90
LUMEN: 3240Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H45mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




80°

ALTD80006B-50W

POWER: 50W
CRI: 90
LUMEN: 4455Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H48mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




80°

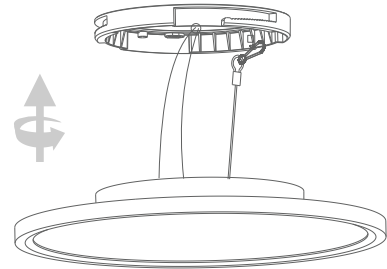



ALDG80006B-30W

POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H860mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



ALDG80006B-40W


POWER: 40W
CRI: 90
LUMEN: 3140Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H860mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

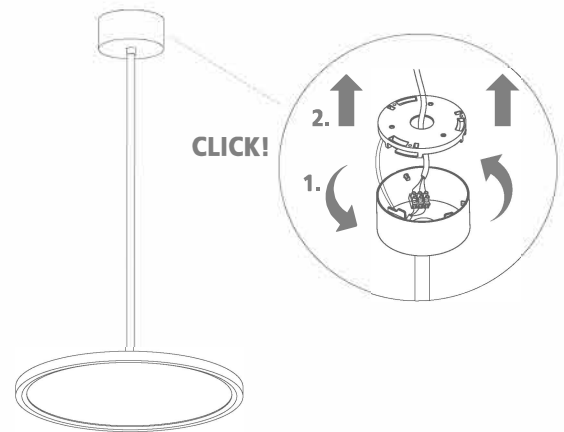

80006B


ALDD80006B-30W

POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




ALDD80006B-40W

POWER: 40W
CRI: 90
LUMEN: 3240Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




ALDD80006B-50W

POWER: 50W
CRI: 90
LUMEN: 4455Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




ALDD80006B-60W

POWER: 60W
CRI: 90
LUMEN: 5896Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




33

Surface mounted (ALTD80006B) + Suspended kits = Suspended (ALDD0006B)




APDX0003-Y
30W/40W/50W/60W common use

80006B-30W



ANGLE 80°

30W 80° 3000K

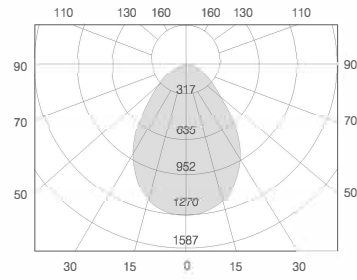


30W 80° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1262.92	1.64/1.61	2.1	386.77
2.0	315.73	3.28/3.23	8.3	96.69
3.0	140.32	4.92/4.84	18.8	42.97
4.0	75.93	6.56/6.45	33.3	24.17
5.0	50.50	8.20/8.07	52.1	15.47


Dv Beam Angle(B):H78.7 V77.8 Field angle(F):H140.6 V135.4

80006B-40W



ANGLE 80°

40W 80° 3000K

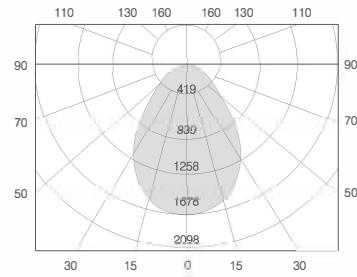


40W 80° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1678.17	1.62/1.62	2.1	515.29
2.0	419.54	3.23/3.24	8.2	128.82
3.0	186.46	4.85/4.86	18.5	57.25
4.0	104.89	6.47/6.48	33.0	32.21
5.0	67.13	8.09/8.11	51.5	20.61


Dv Beam Angle(B):H77.9 V78.1 Field angle(F):H136.6 V143.6

80006B-50W



ANGLE 80°

50W 80° 3000K

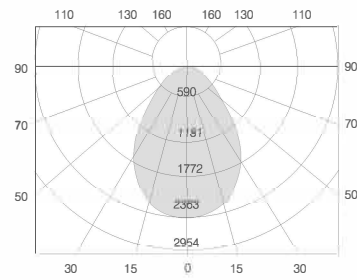


50W 80° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2363.25	1.65/1.66	2.2	714.59
2.0	580.81	3.30/3.33	8.6	178.65
3.0	262.58	4.95/4.99	19.4	79.40
4.0	147.70	6.60/6.65	34.5	44.66
5.0	94.53	8.26/8.32	53.9	28.58


Dv Beam Angle(B):H78.1 V78.5 Field angle(F):H134.2 V134.1

80006B-60W



ANGLE 80°

60W 80° 3000K

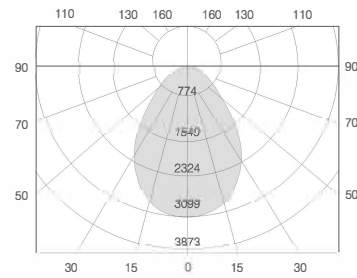

60W 80° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3098.46	1.63/1.62	2.1	949.19
2.0	774.61	3.26/3.23	8.3	237.30
3.0	344.27	4.90/4.85	18.7	105.47
4.0	193.65	6.53/6.47	33.2	59.32
5.0	123.94	8.16/8.09	51.9	37.97

Dv Beam Angle(B):H78.4 V77.9 Field angle(F):H137.2 V137.6

80006H



ALTD80006H-30W



ALTD80006H-40W



ALTD80006H-60W



ALTD80006H-50W

35



ALDG80006H-30W



ALDG80006H-40W

COLOR FINISHINGS:





36

COLOR FINISHINGS:



Black



Black+Gold



White




White+Gold

80006H


ALTD80006H-30W

POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H70mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




ALTD80006H-40W

POWER: 40W
CRI: 90
LUMEN: 3240Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H70mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold





ALTD80006H-50W

POWER: 50W
CRI: 90
LUMEN: 4455Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H73mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




ALTD80006H-60W

POWER: 60W
CRI: 90
LUMEN: 5896Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H73mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold

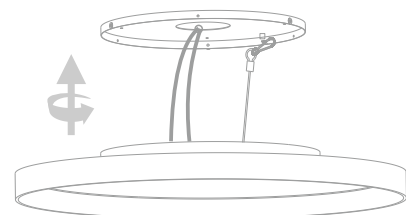

ALDG80006H-30W


POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H860mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




80°

ALDG80006H-40W

POWER: 40W
CRI: 90
LUMEN: 3140Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H860mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



80°

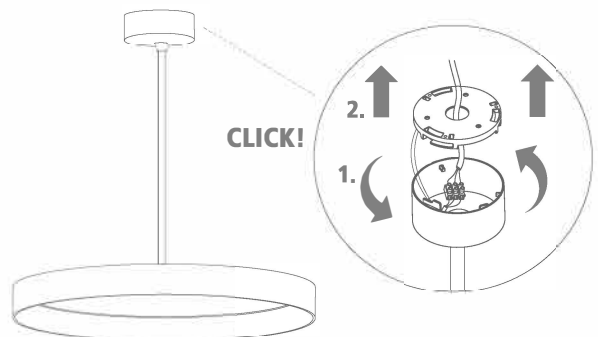


80006H

ALDD80006H-30W

POWER: 30W
CRI: 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø350*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



80°




ALDD80006H-40W

POWER: 40W
CRI: 90
LUMEN: 3140Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø450*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



80°




ALDD80006H-50W

POWER: 50W
CRI: 90
LUMEN: 4455Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø600*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



80°




ALDD80006H-60W

POWER: 60W
CRI: 90
LUMEN: 5896Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø800*H1200Max mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




80°



39

Surface mounted (ALTD80006H) + Suspended kits = Suspended (ALDD80006H)



APDX0003-Y


30W/40W/50W/60W common use

80006H-30W




ANGLE 80°

30W 80° 3000K

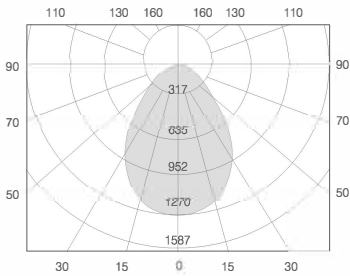

30W 80° 3000K




80006H-40W




ANGLE 80°

40W 80° 3000K

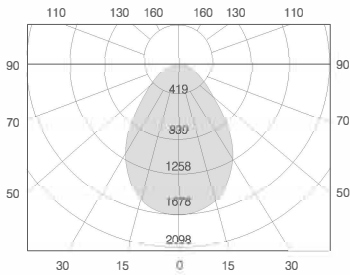

40W 80° 3000K




80006H-50W




ANGLE 80°

50W 80° 3000K

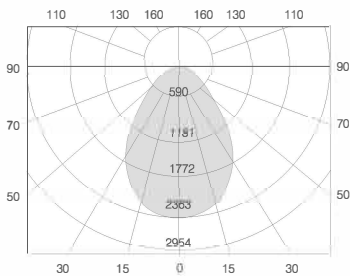

50W 80° 3000K




80006H-60W




ANGLE 80°

60W 80° 3000K

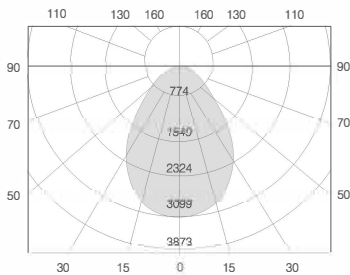

60W 80° 3000K





ON/OFF



DIM TRIAC



DIM 0-10V



DALI



TUYA




TUNABLE BY SWITCH



MICRO-PRISMATIC
DIFFUSER(OPTIONAL)

ITEM CODE						
	ALTD0291D-15WY	●	●		●	●
	ALTD0291D-20WY	●	●		●	●
	ALTD0291D-30WY	●	●		●	●
	ALTD0291C-12WF	●	●		●	
	ALTD0291C-15WF	●	●		●	
	ALTD0291C-25WF	●	●		●	

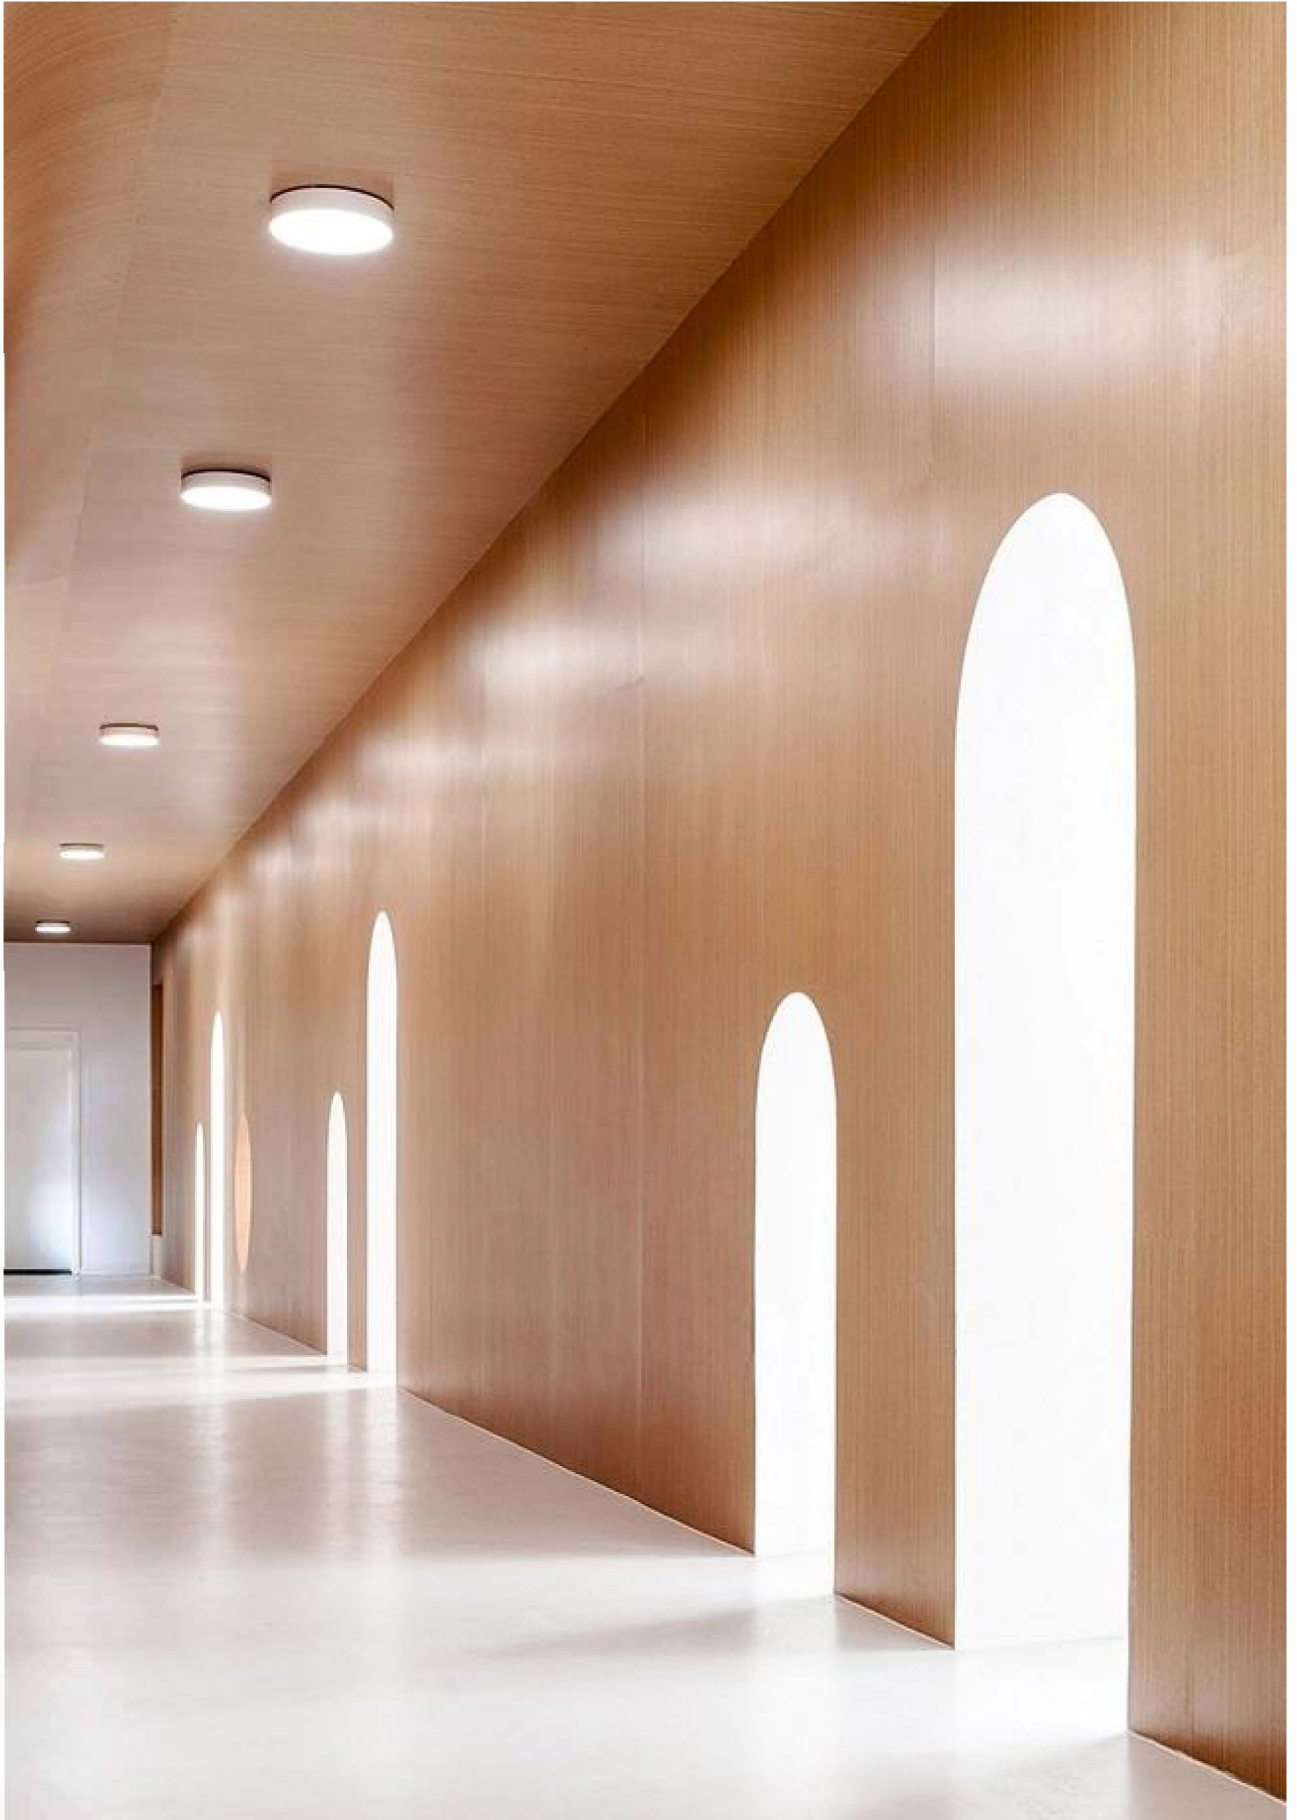

ALTD0291D



15W



20W



30W

ALTD0291D-15WY




POWER: 15W
CRI: 90
LUMEN:1371Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø175*H53mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White

ALTD0291D-20WY

POWER: 20W
CRI: 90
LUMEN:1806Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø210*H53mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White

ALTD0291D-30WY

POWER: 30W
CRI: 90
OUTPUT:2394Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø250*H53mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND

OTHER VERSIONS



ON/OFF



TUNABLE BY SWITCH




DIM TRIAC

ALTD0291D-15WY



ANGLE 110°

15W 110° 3000K

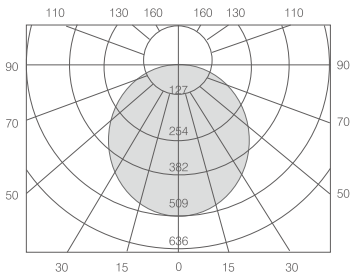

15W 110° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	509.31	3.04/3.00	7.2	84.22
2.0	127.33	6.08/6.01	28.6	21.06
3.0	56.59	9.12/9.01	64.4	9.36
4.0	31.83	12.16/12.02	114.5	5.26
5.0	20.37	15.20/15.02	178.9	3.37


Dv Beam Angle(B):H113.3 V112.7 Field angle(F):H161.7 V161.5

ALTD0291D-20WY



ANGLE 110°

20W 110° 3000K

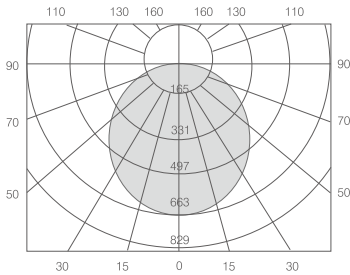


20W 110° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	663.2	3.05/3.03	7.2	109.16
2.0	165.80	6.10/6.07	28.9	27.29
3.0	73.69	9.15/9.10	64.9	12.13
4.0	41.45	12.19/12.13	115.4	6.82
5.0	26.53	15.24/15.16	180.4	4.37


Dv Beam Angle(B):H113.5 V113.2 Field angle(F):H163.5 V163.3

ALTD0291D-30WY



ANGLE 110°

30W 110° 3000K

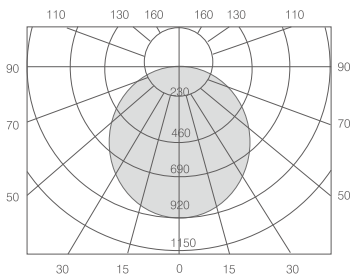

30W 110° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	920.64	2.90/2.93	6.6	160.14
2.0	230.16	5.82/5.85	26.3	40.03
3.0	102.29	8.70/8.78	59.1	17.79
4.0	57.54	11.60/11.71	105.1	10.01
5.0	36.83	14.49/14.64	164.2	6.41

Dv Beam Angle(B):H110.8 V111.3 Field angle(F):H160.4 V160.7



12W




15W



25W

ALTD0291C-12WF

POWER: 12W
CRI: 90
LUMEN: 852Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L120*W120*H59mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



ALTD0291C-15WF

POWER: 15W
CRI: 90
LUMEN: 1287Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L175*W175*H59mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



ALTD0291C-25WF

POWER: 25W
CRI: 90
OUTPUT: 2215Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L250*W250*H59mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS




TUNABLE BY SWITCH




DIM TRIAC

ALTD0291C-12WF



ANGLE 110°

12W 110° 3000K



12W 110° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	289.24	3.00/2.90	6.82	49.10
2.0	72.31	6.00/5.80	27.4	12.274
3.0	32.14	9.00/8.70	61.6	5.46
4.0	18.06	11.99/11.60	109.5	3.07
5.0	11.57	14.99/14.50	171.1	1.96


Dv Beam Angle(B):H112.6 V110.8 Field angle(F):H163.4 V161.9

ALTD0291C-15WF



ANGLE 110°

15W 110° 3000K




15W 110° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	394.74	3.01/2.92	6.9	66.41
2.0	98.68	6.01/5.85	27.8	16.60
3.0	43.86	9.02/8.77	62.4	7.38
4.0	24.67	12.02/11.70	111.0	4.15
5.0	15.79	15.03/14.62	173.5	2.66


Dv Beam Angle(B):H112.7 V111.3 Field angle(F):H163.1 V162.0

ALTD0291C-25WF



ANGLE 110°

25W 110° 3000K




25W 110° 3000K


Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	394.74	3.01/2.92	6.9	66.41
2.0	98.68	6.01/5.85	27.8	16.60
3.0	43.86	9.02/8.77	62.4	7.38
4.0	24.67	12.02/11.70	111.0	4.15
5.0	15.79	15.03/14.62	173.5	2.66

Dv Beam Angle(B):H112.7 V111.3 Field angle(F):H163.1 V162.1


ALXS0812H




8W




12W



15W



20W



25W

COLOR FINISHINGS:



Black



Black+Gold



White




White+Gold

ALXS0812H-8W



ANGLE 80°

8W 80° 3000K

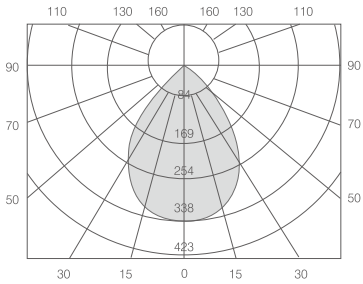


8W 80° 3000K

Dist(m)	Enalir(x)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(lx)
1.0	338.70	1.63/1.65	2.1	102.90
2.0	84.68	3.26/3.30	6.5	25.73
3.0	37.63	4.89/4.96	19.1	11.43
4.0	21.17	6.52/6.61	33.9	6.43
5.0	13.55	8.15/8.26	53.0	4.12

Dv Beam Angle(B):H78. 4 V79.1 Field angle(F):H132.7 V131.6

ALXS0812H-8W

POWER: 8W
CRI: 90
LUMEN: 655Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*H60mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



RECOMMEND



ON/OFF


OTHER VERSIONS



TUNABLE BY SWITCH




DIM TRIAC

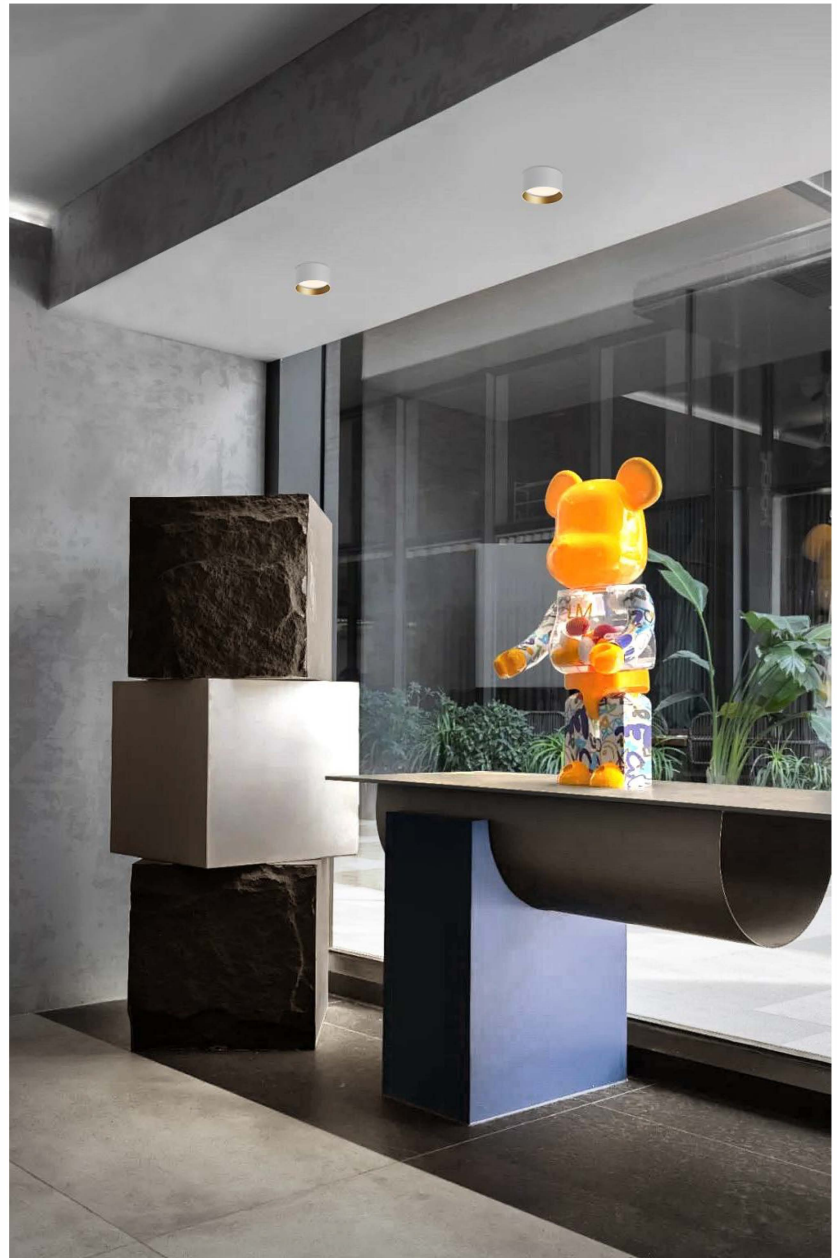

46

ALXS0812H-12W

POWER: 12W
CRI: 90
LUMEN: 984Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø120*H64mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



RECOMMEND



ON/OFF

OTHER VERSIONS




TUNABLE BY SWITCH



DIM TRIAC


ALXS0812H-15W

LED POWER: 15W
CRI: 90
LUMEN: 1186Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø140*H70mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




ALXS0812H-20W

POWER: 20W
CRI: 90
LUMEN: 1497Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø175*H78mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



ALXS0812H-25W

LED POWER: 25W
CRI: 90
LUMEN: 1790Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø210*H82mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



RECOMMEND



ON/OFF

OTHER VERSIONS



TUNABLE BY SWITCH



DIM TRIAC



DIM 0-10V

80210



8W



12W



15W


ALIP80210-8W IP54
ALXS80210-8W

POWER: 8W
CRI: 90
LUMEN: 644Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*H75mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold




ALIP80210-12W IP54
ALXS80210-12W

POWER: 12W
CRI: 90
LUMEN: 959Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø120*H80mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



ALIP80210-15W IP54
ALXS80210-15W

LED POWER: 15W
CRI: 90
LUMEN: 1167Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø140*H85mm
HOLE SIZE: /
BEAM ANGLE: 80°
FINISHED COLOR: Black/White
White+Gold/Black+Gold



47

RECOMMEND OTHER VERSIONS


RECOMMEND OTHER VERSIONS

RECOMMEND OTHER VERSIONS

COLOR FINISHINGS:




80210-8W



ANGLE 80°

8W 80° 3000K

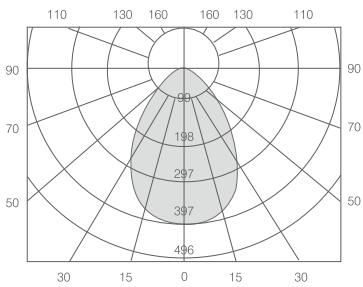

8W 80° 3000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	397.15	1.34/1.35	1.4	135.48
2.0	99.29	2.68/2.69	5.7	33.87
3.0	44.13	4.02/4.04	12.8	15.05
4.0	24.82	5.36/5.38	22.7	8.47
5.0	15.89	6.70/6.73	35.4	5.42


Dv Beam Angle(B):H67.7 V67.9 Field angle(F):H125.8 V125.9

80210-12W



ANGLE 80°

12W 80° 3000K

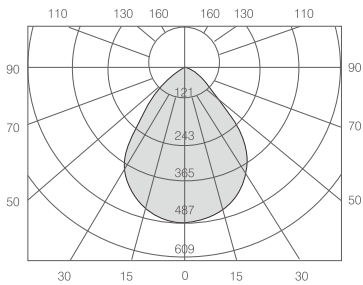

12W 80° 3000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	487.50	1.75/1.76	2.4	141.48
2.0	121.88	3.49/3.53	9.7	35.37
3.0	54.17	5.24/5.29	21.8	15.72
4.0	30.47	6.99/7.05	38.8	8.84
5.0	19.50	7.84/8.82	60.6	5.66

Dv Beam Angle(B):H82.3 V82.8 Field angle(F):H131.7 V131.9




80210-15W



ANGLE 80°

15W 80° 3000K

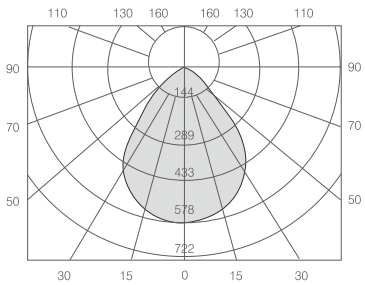

15W 80° 3000K

Dist(m)	Enadir(k)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	578.32	1.75/1.75	2.4	168.24
2.0	144.58	3.50/3.50	9.6	42.06
3.0	64.26	5.26/5.25	21.7	18.69
4.0	36.15	7.01/7.00	38.6	10.51
5.0	23.13	8.76/8.75	60.3	6.73

Dv Beam Angle(B):H82.4 V82.4 Field angle(F):H132.0 V132.2

ALXS0812



8W



12W



15W



20W



30W

COLOR FINISHINGS:



Black



Silver



White




Gold

ALXS0812-8W



ANGLE 110°

8W 110° 3000K

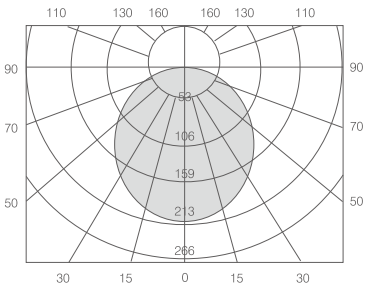

8W 110° 3000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	213.30	2.87/2.81	6.3	39.48
2.0	53.33	5.74/5.62	25.4	9.87
3.0	23.70	8.62/8.44	57.1	4.39
4.0	13.33	11.49/11.25	101.5	2.47
5.0	8.53	14.36/14.06	158.6	1.58

Dv Beam Angle(B): H110.3 V109.2 Field angle(F): H163.0 V162.0




ALXS0812-8W

POWER: 8W
CRI: 90
LUMEN: 668lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold




ALXS0812-12W

POWER: 12W
CRI: 90
LUMEN: 1090lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø120*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold




ALXS0812-15W

POWER: 15W
CRI: 90
LUMEN: 1439lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø140*H65mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold




ALXS0812-20W

POWER: 20W
CRI: 90
LUMEN: 1762lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø175*H78mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



ALXS0812-30W

POWER: 30W
CRI: 90
LUMEN: 2510lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø210*H82mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



Rea Light

ALXS80106 SERIES



7W



12W



20W



30W

COLOR FINISHINGS:



Black+Black



Black+Gold



White+Black



White+Gold



ALGD80106

ALXS80106-7W

POWER: 7W
CRI: 90
LUMEN: 631Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø73*H55mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 90°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



Ø73

ALXS80106-12W


POWER: 12W
CRI: 90
LUMEN: 1184Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H55mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 90°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



Ø95

ALXS80106-20W


LED POWER: 20W
CRI: 90
LUMEN: 2174Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø123*H60mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



Ø123

ALXS80106-30W

LED POWER: 30W
CRI: 90
LUMEN: 3329Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø153*H65mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



Ø153

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DALI

ALXS80106-7W




ANGLE 90°

ALXS80106-12W




ANGLE 90°

ALXS80106-20W




ANGLE 30°




60°

ALXS80106-30W




ANGLE 30°



60°

7W 90° 4000K




7W 90° 4000K

Dist(m)	Enadir(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	339.40	1.96/1.95	3.0	90.76
1.6	132.58	3.14/3.13	7.7	35.45
2.0	84.85	3.92/3.91	12.1	22.69
2.5	56.54	4.80/4.79	18.1	15.12
3.0	37.71	5.88/5.86	27.1	10.08

Dv Beam Angle(B):H88.9 V88.7 Field angle(F):H88.7 V88.6

12W 90° 4000K




12W 90° 4000K

Dist(m)	Enadir(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	720.11	1.70/1.67	2.2	219.67
1.6	281.29	2.72/2.67	5.7	85.81
2.0	180.03	3.40/3.34	8.9	54.92
2.5	119.97	4.16/4.09	13.4	36.60
3.0	80.01	5.10/5.01	20.1	24.41

Dv Beam Angle(B):H85.7 V79.7 Field angle(F):H80.4 V89.6

20W 30° 4000K




20W 30° 4000K

Dist(m)	Enadir(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	5503.54	0.57/3.01	0.3	2332.86
1.6	1375.89	1.13/1.14	1.0	586.21
2.0	611.50	1.70/1.71	2.3	259.21
2.5	343.97	2.27/2.28	4.1	145.80
3.0	220.14	2.84/2.85	6.4	93.31

Dv Beam Angle(B):H31.7 V31.8 Field angle(F):H56.4 V56.1

30W 30° 4000K



30W 30° 4000K

Dist(m)	Enadir(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	9437.06	0.54/3.01	0.2	4041.49
1.6	3686.35	0.86/0.86	0.6	1578.71
2.0	2359.27	1.07/1.07	0.9	1010.37
2.5	1572.19	1.31/1.31	1.4	673.30
3.0	1048.56	1.61/1.61	2.0	449.05

Dv Beam Angle(B):H30.0 V30.0 Field angle(F):H55.3 V54.6

2ALXS3402

COLOR FINISHINGS:



Black




White




White+Black

53

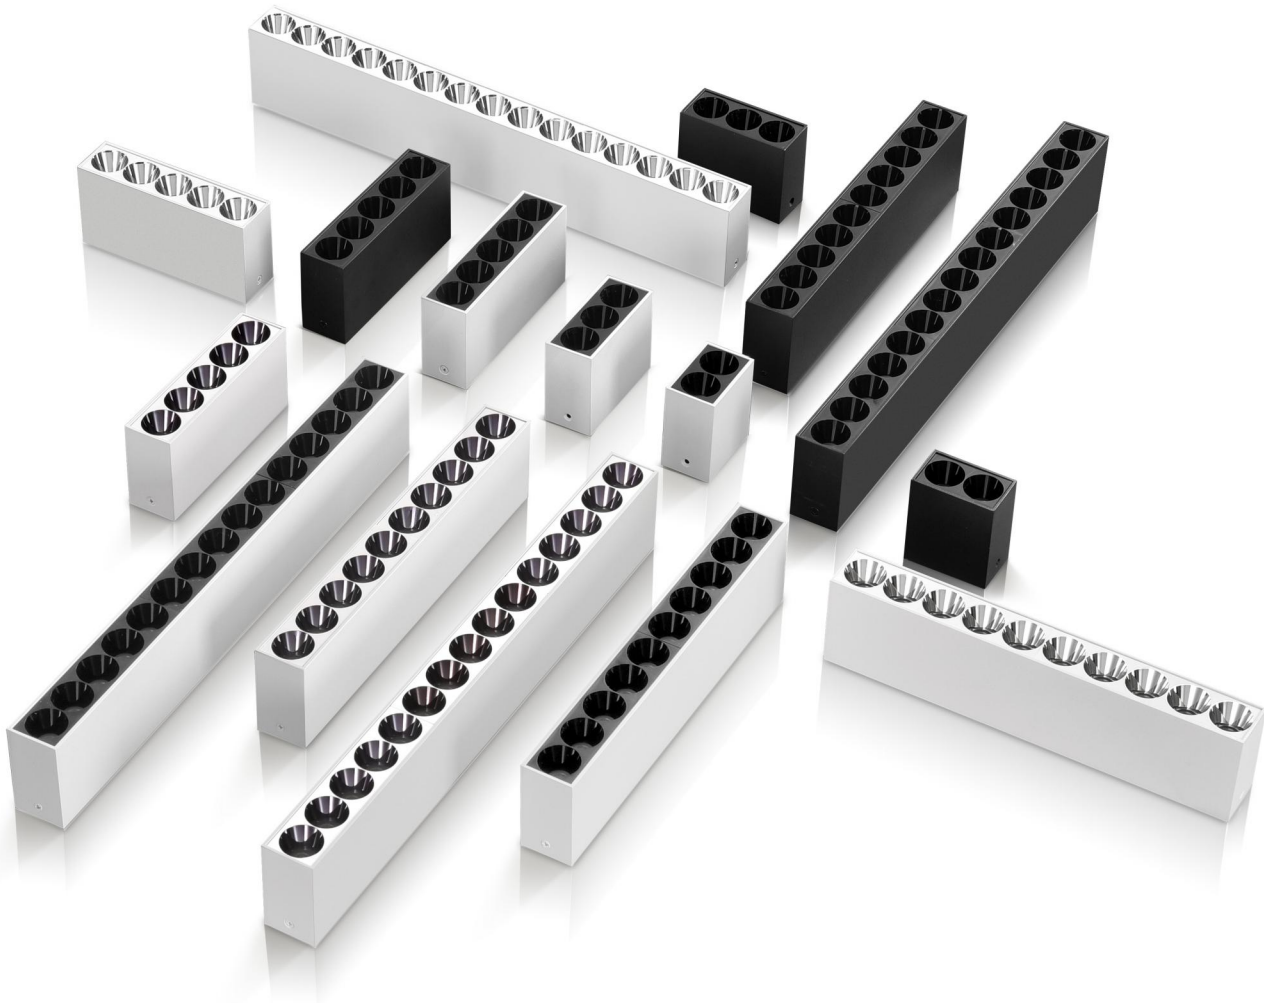

2ALXS3402-4W



ANGLE 24°


OTHER VERSIONS



15°

38°

4W 24° 4000K



4W 24° 4000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	907.07	0.51/0.51	0.2	389.31
2.0	226.77	1.01/1.01	0.8	97.33
3.0	100.79	1.52/1.52	1.8	43.26
4.0	56.69	2.02/2.03	3.2	24.33
5.0	36.28	2.53/2.53	5.0	15.57

Dv Beam Angle(B):H28.4 V28.4 Field angle(F):H56.5 V57.3



4W




6W



10W




20W

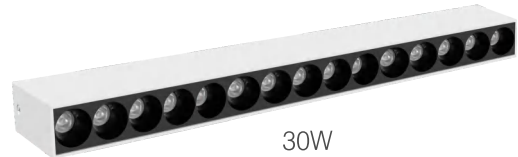

30W


2ALXS3402-4W

POWER: 4W
CRI: 90
LUMEN: 378Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L57*W35*H66mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Black+White




2ALXS3402-6W

POWER: 6W
CRI: 90
LUMEN: 411Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L84*W35*H66mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Black+White



2ALXS3402-10W


POWER: 10W
CRI: 90
LUMEN: 685Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L136*W35*H66mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Black+White



54


2ALXS3402-20W

POWER: 20W
CRI: 90
LUMEN: 1647Lm/4000K
CCT: 3000K/4000K
INPUT: 200-240VAC, 50/60Hz
DIMENSION: L270*W35*H66mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Black+White



2ALXS3402-30W


POWER: 30W
CRI: 90
LUMEN: 2305Lm/4000K
CCT: 3000K/4000K
INPUT: 200-240VAC, 50/60Hz
DIMENSION: L402*W35*H66mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Black+White



RECOMMEND



ON/OFF

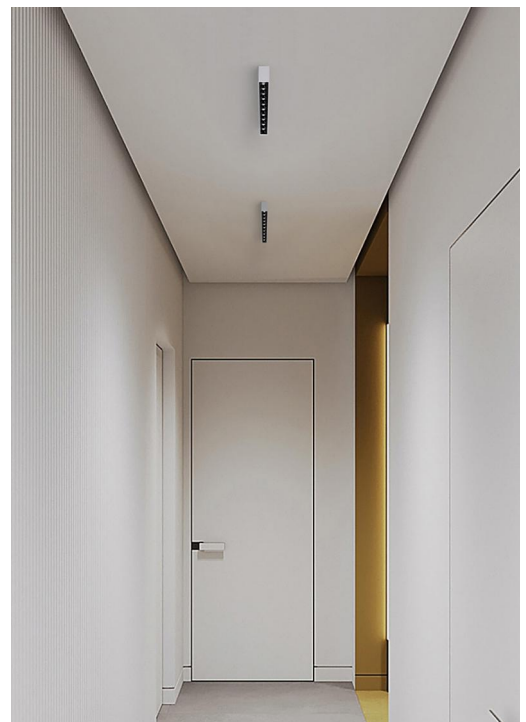

ALXS80224

55



30W



12W



21W

COLOR FINISHINGS

Lamp body:Black/White



Black+Black



White+White

Anti-glare cup



Black




White



Gold

ALXS80224-12W



ANGLE 38°



OTHER VERSIONS



24°



45°

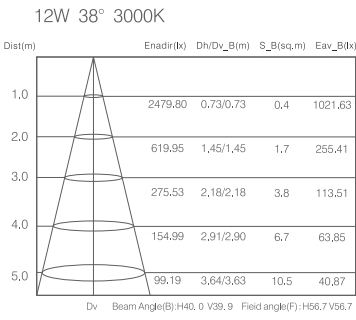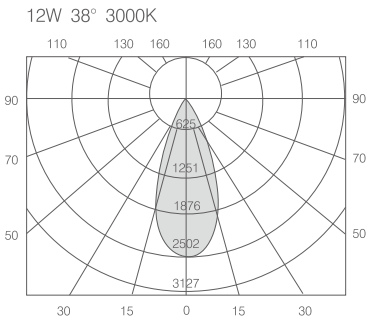


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2479.80	0.73/0.73	0.4	1021.63
2.0	619.95	1.45/1.45	1.7	255.41
3.0	275.53	2.18/2.18	3.8	113.51
4.0	154.99	2.91/2.90	6.7	63.85
5.0	99.19	3.64/3.63	10.5	40.87

Dv Beam Angle(B):H40.0 V39.9 Field angle(F):H56.7 V56.7




ALXS80224-12W

POWER: 12W
CRI: 90
LUMEN: 1088lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L127*W45*H85mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALXS80224-21W

POWER: 21W
CRI: 90
LUMEN: 2156lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L207*W45*H85mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



ALXS80224-30W

POWER: 30W
CRI: 90
LUMEN: 2874lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L287*W45*H85mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC



DIM 1-10V



DALI

ALXS80224



2*15W



3*15W



4*15W



5*15W



6*15W

57

Anti-glare cup



Black




White



Gold


ALXS80224-2*15W

POWER: 30W
CRI: 90
LUMEN: 2874Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1000*W46*H56.5mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALXS80224-3*15W

POWER: 3*15W
CRI: 90
LUMEN: 4515Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1500*W46*H56.5mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White

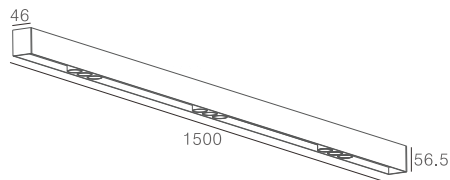


ALXS80224-4*15W

POWER: 2*30W
CRI: 90
LUMEN: 5748Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L2000*W46*H56.5mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White

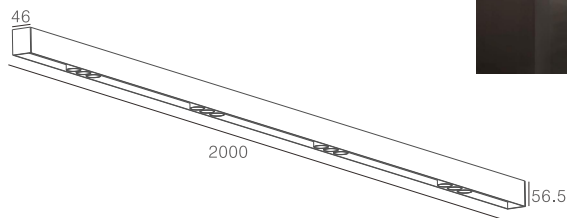


ALXS80224-5*15W

POWER: 5*15W
CRI: 90
LUMEN: 7525Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L2500*W46*H56.5mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White

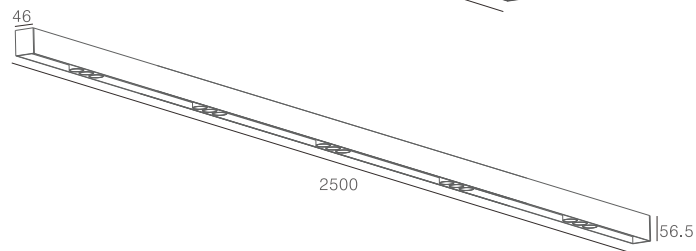

ALXS80224-6*15W

POWER: 3*30W
CRI: 90
LUMEN: 8622Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L3000*W46*H56.5mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White

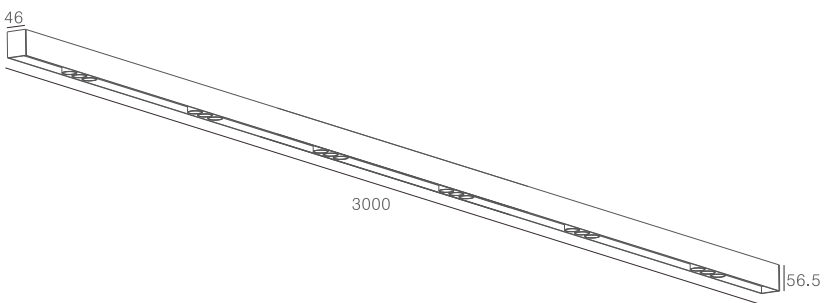

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALXS80224-30W



ANGLE 38°

OTHER VERSIONS




24°



45°

30W 38° 3000K



30W 38° 3000K

Dist(m)	Enadir(k)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	6275.10	0.75/0.75	0.4	2564.35
2.0	1568.77	1.49/1.49	1.8	641.09
3.0	697.23	2.24/2.24	3.9	284.93
4.0	392.19	2.98/2.98	7.0	160.27
5.0	251.00	3.73/3.73	10.9	102.57

Dv Beam Angle(B):H40.9 V40.9 Field angle(F):H57.9 V57.7

ALBD80118 SERIES



8W



12W



Note: Reflectors are black only

ALBD80118-8W

POWER: 8W
CRI: 90
LUMEN: 883Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L164*W84*H40mm
HOLE SIZE: /
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black

ALBD80118-12W

POWER: 12W
CRI: 90
LUMEN: 1325Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L244*W84*H40mm
HOLE SIZE: /
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black



RECOMMEND

OTHER VERSIONS



ON/OFF




DIM TRIAC



DALI

ALBD80118-8W




ANGLE 65°

OTHER VERSIONS



80°


8W 65° 3000K

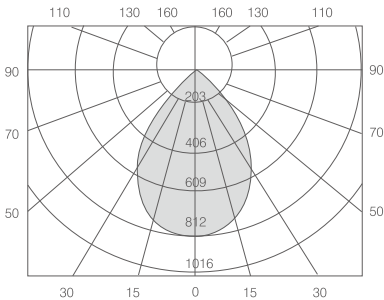

8W 65° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	810.00	1.35/1.38	1.5	273.62
2.0	202.50	2.70/2.77	5.9	68.40
3.0	90.00	4.06/4.15	13.3	30.40
4.0	50.63	5.41/5.53	23.6	17.10
5.0	32.40	6.76/6.91	36.9	10.94

ALBD80118-12W




ANGLE 65°

OTHER VERSIONS



80°

12W 65° 3000K

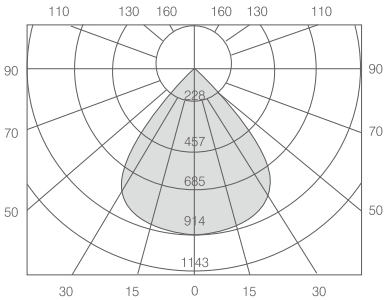


12W 65° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	909.35	1.57/1.58	2.0	284.50
2.0	227.34	3.15/3.16	7.8	71.12
3.0	101.04	4.72/4.74	17.6	31.61
4.0	56.83	6.29/6.32	31.3	17.78
5.0	36.37	7.86/7.90	48.8	11.38

ALIP80206


ReaLight

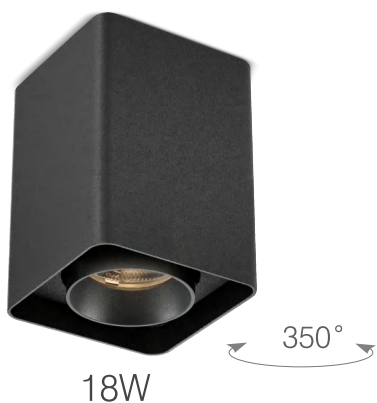


IP54



2*18W



2*10W



COLOR FINISHINGS:



White



Black



White




Black




ALIP80206-10W [IP54]

POWER: 10W
CRI: 90
LUMEN:999Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L86*W86*H125mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White




ALIP80206-18W [IP54]

POWER: 18W
CRI: 90
LUMEN:1769Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L107*W107*H145mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White




ALIP80206-2*10W [IP54]

POWER: 2*10W
CRI: 90
LUMEN:1998Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L166*W86*H125mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



ALIP80206-2*18W [IP54]

POWER: 2*18W
CRI: 90
LUMEN:3538Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L207*W107*H145mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI


ALIP80206-10W

OTHER VERSIONS


ANGLE 36°

15° 24° 50°

10W 36° 4000K

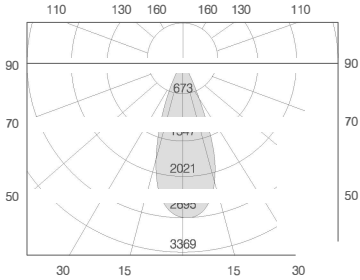

10W 36° 4000K



ALXS0853A




8W



2*8W


ALXS0853A-8WF

POWER: 8W
CRI: 90
LUMEN: 825lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L100*W100*H100mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALXS0853A-2*8WF

POWER: 16W
CRI: 90
LUMEN: 1481lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L195*W100*H100mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




RECOMMEND



ON/OFF

ALXS0853A-8WF



ANGLE 24°


OTHER VERSIONS



15°

38°


8W 24° 3000K

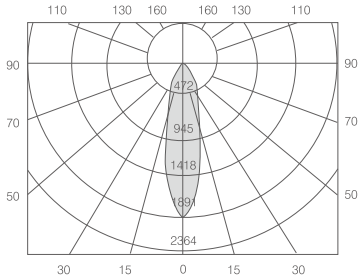

8W 24° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(lx)
1.0	1891.49	0.42/0.31	0.1	973.32
2.0	472.87	0.83/0.83	0.5	243.33
3.0	210.17	1.25/1.25	1.2	108.15
4.0	118.22	1.67/1.66	2.2	60.83
5.0	75.66	2.09/2.08	3.4	38.93

ALXS0853A-2*8WF



ANGLE 24°


OTHER VERSIONS



15°

38°

2*8W 24° 3000K

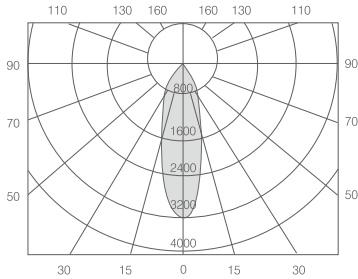

2*8W 24° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(lx)
1.0	3101.81	0.44/0.45	0.2	1552.08
2.0	775.45	0.88/0.90	0.6	388.02
3.0	344.65	1.31/1.35	1.5	172.45
4.0	193.86	1.75/1.80	2.6	97.00
5.0	124.07	2.19/2.25	4.1	62.08




5W



5W


ALXS0903W-5W

POWER: 5W
CRI: 90
LUMEN: 376Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø48*H50mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black/White



ALXS0903A-5W

POWER: 5W
CRI: 90
LUMEN: 376Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø48*H80mm
HOLE SIZE: /
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black/White




RECOMMEND



ON/OFF



0903-5W




ANGLE 38°

OTHER VERSIONS



24°

5W 40° 3000K

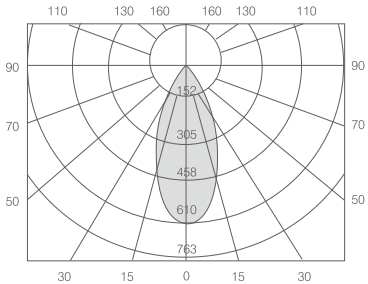

5W 40° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	608.81	0.78/0.76	0.5	247.52
2.0	152.20	1.55/4.53	1.9	61.88
3.0	67.65	2.33/2.29	4.2	27.50
4.0	38.05	3.10/3.06	7.5	15.47
5.0	24.35	3.88/3.82	11.7	9.90

Dv Beam Angle(B): H42.4 V41.8 Field angle(F): H69.7 V69.6

ALIP80201

ReaLight




10W



18W



24W



350°

25°



IP54



COLOR FINISHINGS




Black



White


ALIP80201-10W IP54

POWER: 10W
CRI: 90
UGR: < 13
LUMEN: 1050Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø86*H120mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White




ALIP80201-18W IP54

POWER: 18W
CRI: 90
UGR: < 13
LUMEN: 1769Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø110*H145mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



ALIP80201-24W IP54

POWER: 24W
CRI: 90
UGR: < 13
LUMEN: 2146Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø132*H165mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

ALIP80201-10W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

10W 36° 4000K

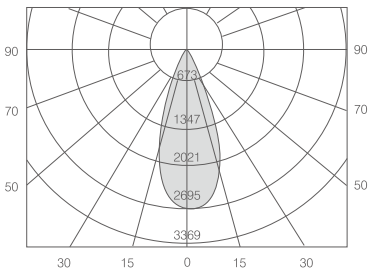

10W 36° 4000K


Diat(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2684.37	0.66/0.67	0.4	1119.03
2.0	671.09	1.32/1.35	1.4	279.76
3.0	298.26	1.98/2.02	3.2	124.34
4.0	167.77	2.63/2.69	5.6	69.94
5.0	107.37	3.29/3.37	8.8	44.76

Dv Beam Angle(B):H36.5 V37.2 Field angle(F):H53.9 V53.9


ALXS0675A



ALXS0675A-6W
POWER: 6W
CRI: 90
LUMEN: 510Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H85mm
HOLE SIZE: /
BEAM ANGLE: 10°/24°/38°
FINISHED COLOR: Black/White/Silver/Gold



ALXS0675A-8W
POWER: 8W
CRI: 90
LUMEN: 690Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H95mm
HOLE SIZE: /
BEAM ANGLE: 10°/24°/38°
FINISHED COLOR: Black/White/Silver/Gold



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC

COLOR FINISHINGS:




ALXS0675A-6W




ANGLE 38°


OTHER VERSIONS



6W 38° 3000K



6W 38° 3000K




ALXS0675A-8W




ANGLE 38°


OTHER VERSIONS



8W 38° 3000K



8W 38° 3000K





15W



25W



33W

COLOR FINISHINGS:



Black



White



Gold



ALDD0685A


ALXS0685A-15W

POWER: 15W
CRI: 90
LUMEN:1264Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø75*H135mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold




ALXS0685A-25W

POWER: 25W
CRI: 90
LUMEN:2237Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø95*H155mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold



ALXS0685A-33W

POWER: 33W
CRI: 90
LUMEN:2801Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø105*H170mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI



ALXS0685A-15W




ANGLE 38°



15°

24°

15W 38° 3000K



15W 38° 3000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lk)
1.0	2779.80	0.70/0.56	0.4	1147.82
2.0	694.95	1.40/1.40	1.6	286.95
2.5	444.77	1.75/1.76	2.4	183.65
3.5	226.92	2.46/2.46	4.8	93.70
4.5	137.27	3.16/3.16	7.9	56.68

ALIP0673A



9W



15W



20W



IP54



40W



60W



30W



80W

69

ALIP0673A-9W IP54

POWER: 9W
CRI: 90
LUMEN: 689Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H90mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White




ALIP0673A-15W IP54

POWER: 15W
CRI: 90
LUMEN: 1215Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H152mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White




ALIP0673A-20W IP54

POWER: 20W
CRI: 90
LUMEN: 1683Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H152mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White




ALIP0673A-30W IP54

POWER: 30W
CRI: 90
LUMEN: 2475Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø115*H152mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White




ALIP0673A-40W IP54

POWER: 40W
CRI: 90
LUMEN: 3369Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø140*H162mm
HOLE SIZE: /
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White




ALIP0673A-60W IP54

POWER: 60W
CRI: 90
LUMEN: 5202Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 120-277VAC, 50/60Hz
DIMENSION: Ø170*H182mm
HOLE SIZE: /
BEAM ANGLE: 20°/40°
FINISHED COLOR: Black/White



ALIP0673A-80W IP54

POWER: 80W
CRI: 90
LUMEN: 7852Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 120-277VAC, 50/60Hz
DIMENSION: Ø205*H212mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

COLOR FINISHINGS



Black




White




70


ALIP0673A-9W



9W 40° 3000K



9W 40° 3000K



ALXS0833C



9W



15W




24W



ALGD0833C


ALXS0833C-9W

POWER: 9W
CRI: 90
LUMEN: 724Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H100mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALXS0833C-15W

POWER: 15W
CRI: 90
LUMEN: 1393Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H116mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALXS0833C-24W

POWER: 24W
CRI: 90
LUMEN: 2429Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H122mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




ON/OFF




DIM TRIAC

ALXS0833C-9W




ANGLE 38°

OTHER VERSIONS



15° 24°

9W 38° 3000K



9W 38° 3000K


Dist(m)	EnaDir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1651.08	0.69/0.59	0.3	699.80
2.0	412.77	1.19/1.17	1.1	174.95
3.0	183.45	1.78/1.76	2.5	77.76
4.0	103.19	2.37/2.34	4.4	43.74
5.0	66.04	2.97/2.93	6.9	27.99

Dv Beam Angle(B): H33.1 V32.7 Field angle(F): H60.3 V60.0




ALXS0833D-9W

POWER: 9W
CRI: 90
LUMEN: 673Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H100mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




ALXS0833D-15W

POWER: 15W
CRI: 90
LUMEN: 1139Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H116mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



ALXS0833D-24W

POWER: 24W
CRI: 90
LUMEN: 2163Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H122mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




ON/OFF




DIM TRIAC



ALXS0833D-9W



9W 110° 3000K



9W 110° 3000K

Dist(m)	Enadir(ks)	Dh/Dv_B(m)	S_B(sq_m)	Eav_B(k)
1.0	224.06	2.76/2.83	6.1	42.24
2.0	56.02	5.52/5.66	24.6	10.56
3.0	24.90	8.28/8.50	55.3	4.69
4.0	14.00	11.04/11.33	98.3	2.64
5.0	8.96	13.80/14.16	153.6	1.69

Dv = Beam Angl(B):H108.1 V109.5 Field angl(F): H161.3 V159.8

ALXS80043



12W



18W




24W



ALGD80043


ALXS80043-12W

POWER: 12W
CRI: 90
LUMEN: 1206Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*W47mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALXS80043-18W

LED POWER: 18W
CRI: 90
LUMEN: 1794Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H52mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALXS80043-24W

LED POWER: 24W
CRI: 90
LUMEN: 2129Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø125*H57mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC

COLOR FINISHINGS:



Black




White



White+Black

ALXS80043-12W




ANGLE 24°

OTHER VERSIONS



15° 38°


12W 24° 4000K



12W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	7050.16	0.40/0.39	0.1	3119.22
2.0	1762.65	0.80/0.79	0.52	779.81
3.0	783.35	1.20/1.18	1.1	346.58
4.0	440.64	1.60/1.57	2.0	194.95
5.0	282.01	2.00/1.97	3.1	124.77

ALXS80043-18W




ANGLE 24°

OTHER VERSIONS




15° 38°

18W 24° 4000K






18W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	10432.84	0.39/0.39	0.1	4659.58
2.0	2608.21	0.78/0.77	0.5	1164.89
3.0	1159.20	1.17/1.16	1.1	517.73
4.0	652.05	1.57/1.54	1.9	291.22
5.0	417.31	1.96/1.93	3.0	186.38

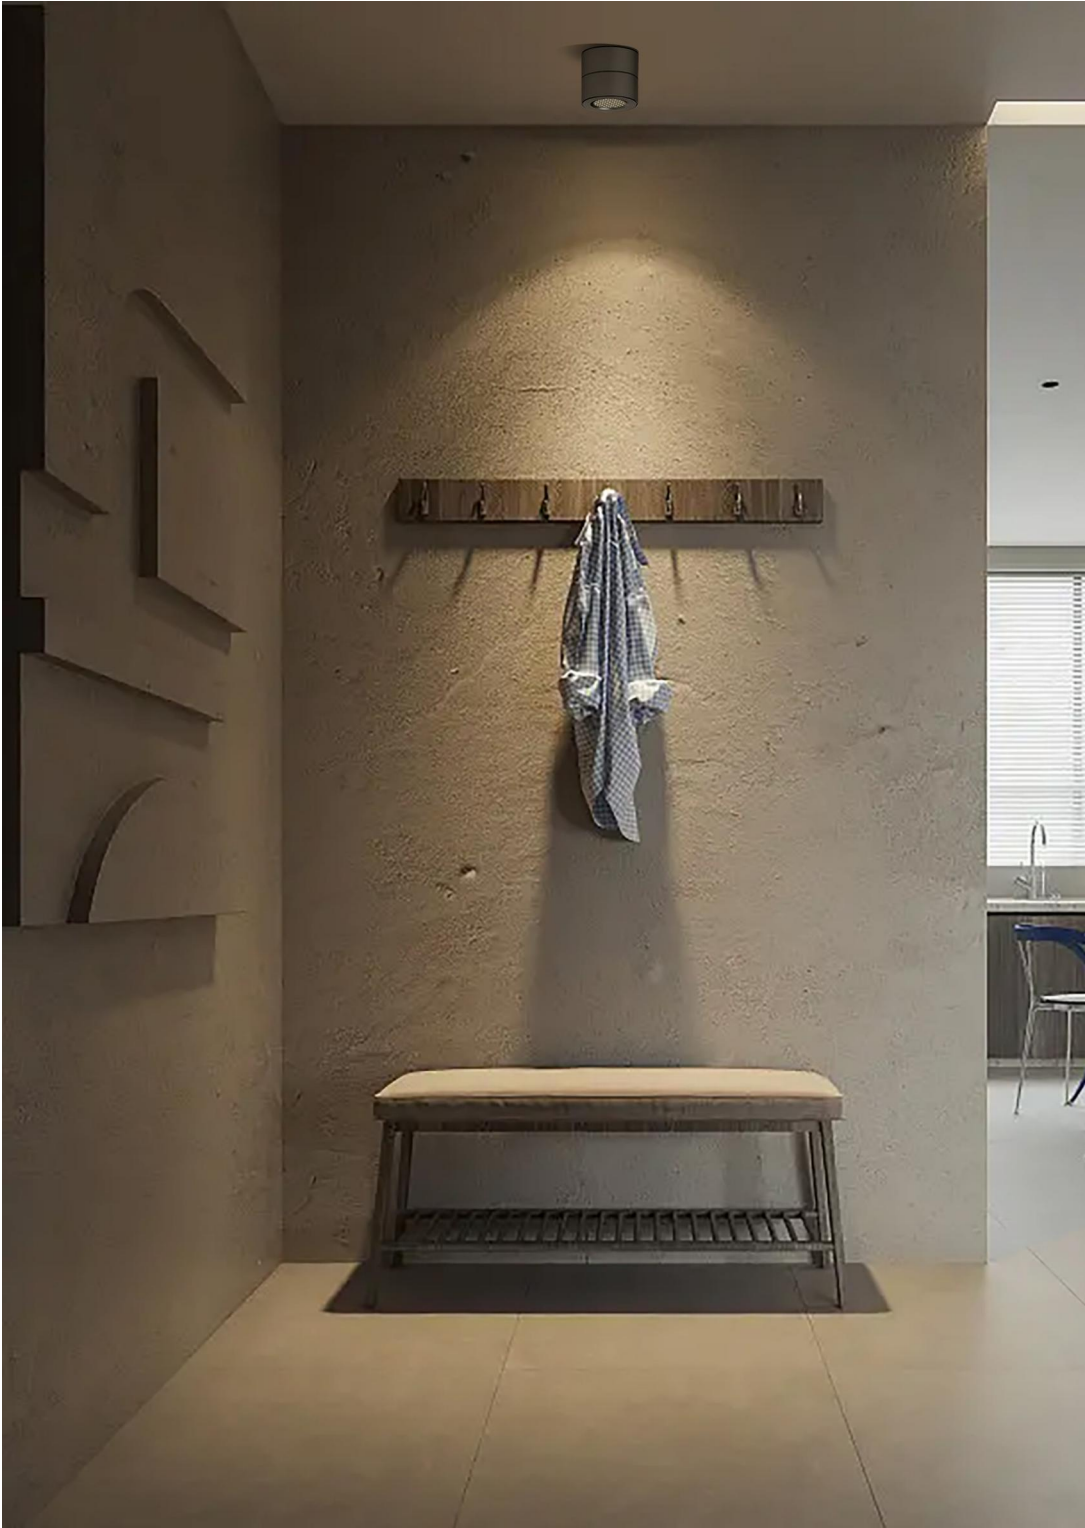

ALXS80043-24W



24W 24° 4000K

Dist(m)	Enad(lr/k)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	11973.69	0.37/0.36	0.1	5436.94
2.0	2993.42	0.75/0.72	0.4	1359.23
3.0	1330.41	1.12/1.08	1.0	604.10
4.0	748.36	1.49/1.44	1.7	339.81
5.0	478.95	1.86/1.81	2.7	217.48

Dv Beam Angle(B): H21, 1 V20, 8 Field angle(F): H37.8 V35.0

ALTH80011A

COLOR FINISHINGS:



White



Black



ALTH80011A-12WY



ALTH80011A-12WF



ALTH80011A-2*12WF



ALTH80012A-12WY



ALTH80012A-12WF



ALTH80012A-2*12WF

COLOR FINISHINGS:



White

Black


ALTH80011A



12WY




12WF



2*12WF


ALTH80011A-12WY

POWER: 12W
CRI: 90
LUMEN: 1084Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H85mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White





ALTH80011A-12WF

POWER: 12W
CRI: 90
LUMEN: 1069Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L85*W85*H90mm
HOLE SIZE: 75*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80011A-2*12WF

POWER: 2*12W
CRI: 90
LUMEN: 2092Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L157*W85*H90mm
HOLE SIZE: 145*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White

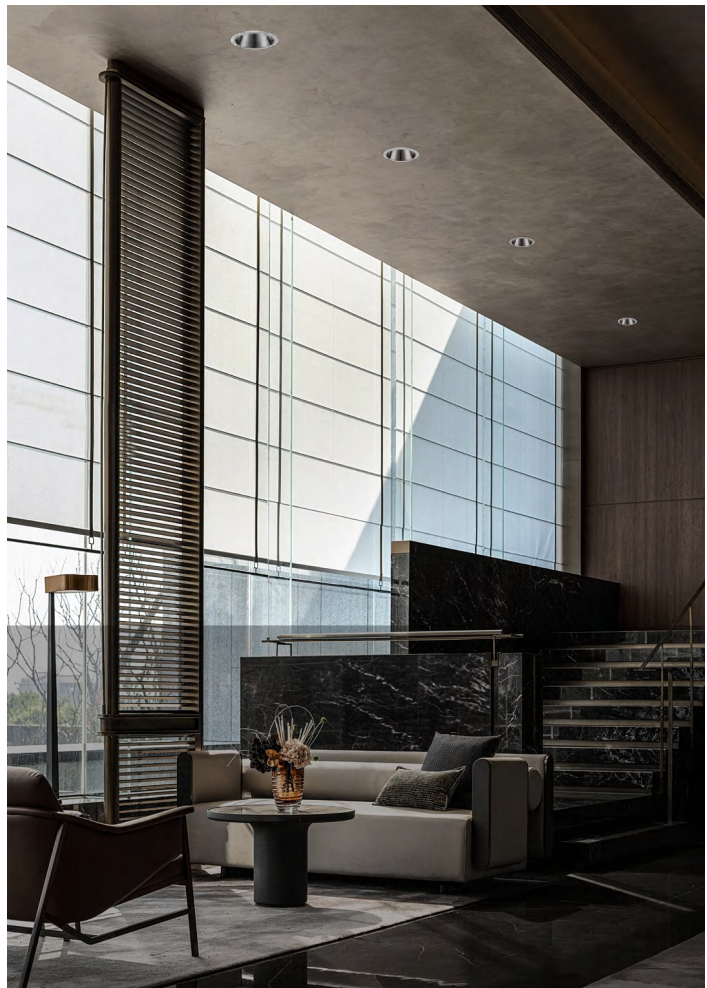

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALTH80011A-12W



ANGLE 24°


OTHER VERSIONS



15°

38°

12W 24° 4000K

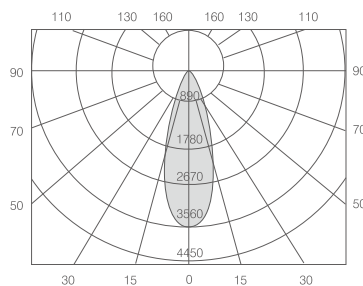

12W 24° 4000K

Dist.(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3559.43	0.52/0.52	0.2	1525.54
2.0	889.86	1.04/1.03	0.8	381.39
3.0	395.49	1.56/1.55	1.9	169.50
4.0	222.46	2.09/2.07	3.4	95.35
5.0	142.38	2.61/2.59	5.3	61.02


Dv Beam Angle(B):H29.2 V29.0 Field angle(F):H48.1 V48.0



12WY




12WF



2*12WF


ALTH80012A-12WY

POWER: 12W
CRI: 90
LUMEN: 1069Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H85mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALTH80012A-12WF

POWER: 12W
CRI: 90
LUMEN: 1050Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L100*W100*H90mm
HOLE SIZE: 75*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80012A-2*12WF

POWER: 2*12W
CRI: 90
LUMEN: 2072Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L172*W100*H90mm
HOLE SIZE: 145*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC




DIM 0-10V



DALI

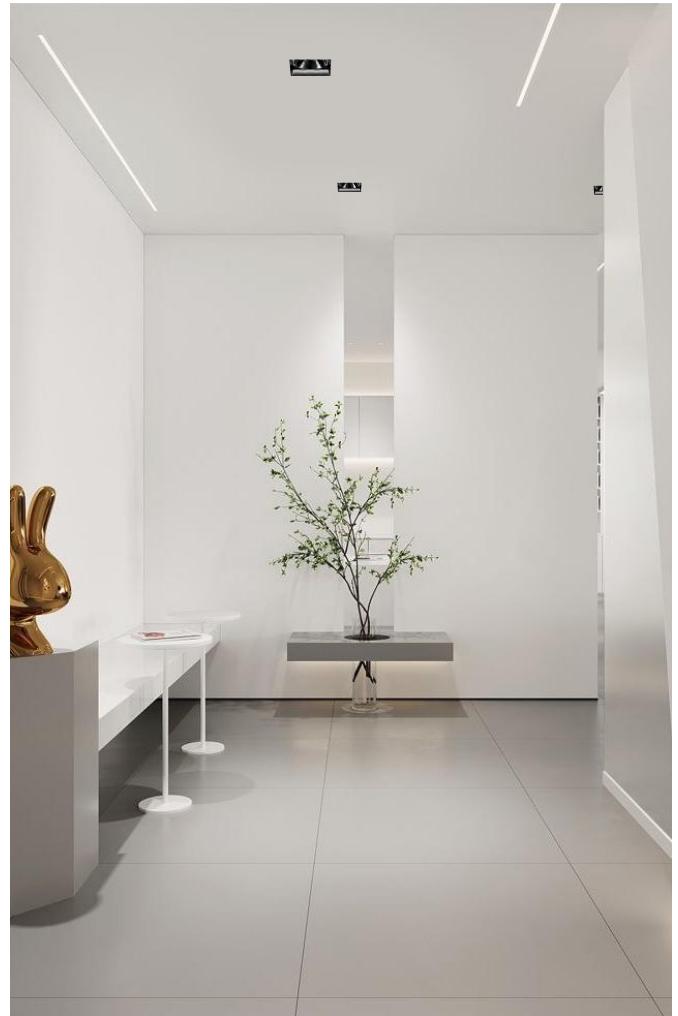

ALTH80012A-12W



ANGLE 24°


OTHER VERSIONS




15°

38°

12W 24° 4000K

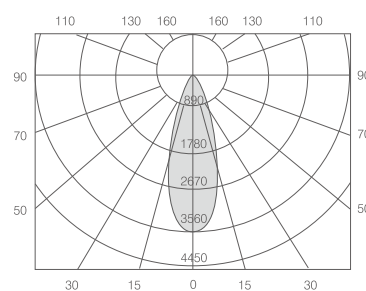

12W 24° 4000K

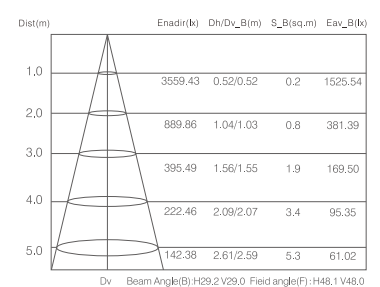



ALTH80013-2WF



ALTH80013-9WF

ALTH80013 SERIES



ALTH80013-9WY



ALTH80013-10WF



ALTH80013-20WF



ALTH80013



2WF




10WF



20WF


ALTH80013-2WF

POWER: 2W
CRI: 90
LUMEN: 149lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L45*W45*H42mm
HOLE SIZE: L37*W37mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALTH80013-10WF

POWER: 10W
CRI: 90
LUMEN: 912lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L147*W45*H42mm
HOLE SIZE: L142*W37mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80013-20WF

POWER: 20W
CRI: 90
LUMEN: 1847lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L280*W45*H42mm
HOLE SIZE: L275*W37mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM 0-10V



DALI

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

81

ALTH80013-2WF



ANGLE 24°


OTHER VERSIONS



15°

38°

2W 24° 4000K




2W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	643.49	0.45/0.44	0.2	284.96
2.0	160.87	0.89/0.87	0.6	71.25
3.0	71.50	1.34/1.31	1.4	31.66
4.0	40.22	1.79/1.74	2.5	17.81
5.0	25.74	2.23/2.18	3.9	11.40

Dv Beam Angle(B): H25.2° V24.6° Field angle(F): H43.8° V44.6°

ALTH80013-10WF



ANGLE 24°


OTHER VERSIONS



15°

38°

10W 24° 4000K



10W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3337.31	0.43/0.50	0.2	1521.12
2.0	834.33	0.87/1.01	0.6	380.28
3.0	370.81	1.30/1.51	1.7	169.01
4.0	208.58	2.17/2.52	3.0	95.07
5.0	133.49	2.60/3.02	4.7	60.84

Dv Beam Angle(B): H24.4° V28.2° Field angle(F): H43.8° V45.7°

ALTH80013-20WF



ANGLE 24°


OTHER VERSIONS



15°

38°

20W 24° 4000K



20W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	6875.83	0.50/0.48	0.2	3010.15
2.0	1718.96	1.00/0.96	0.6	752.54
3.0	763.98	1.50/1.43	1.7	334.46
4.0	429.74	2.00/1.91	3.1	188.13
5.0	275.03	2.50/2.39	4.8	120.41

Dv Beam Angle(B): H28.1° V26.9° Field angle(F): H46.0° V45.5°




9WY



9WF


ALTH80013-9WY

POWER: 9W
CRI: 90
LUMEN: 709Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H38mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80013-9WF

POWER: 9W
CRI: 90
LUMEN: 727Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L75*W75*H42mm
HOLE SIZE: L70*W70mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI



ALTH80013-9W



ANGLE 24°

OTHER VERSIONS




15°




38°

9W 24° 4000K



9W 24° 4000K

Dist(m)	Enadir(lx)	Dh(Dv,8m)	S_B(sq.m)	Eav_B(lx)
1.0	3061.27	0.40/0.44	0.1	1356.78
2.0	765.32	0.81/0.88	0.6	339.19
3.0	340.14	1.21/1.32	1.3	150.75
4.0	191.33	1.61/1.77	2.3	84.80
5.0	122.45	2.02/2.21	3.6	54.27



ALTH80014-9WF





ALTH80014-9WY



COLOR FINISHINGS:



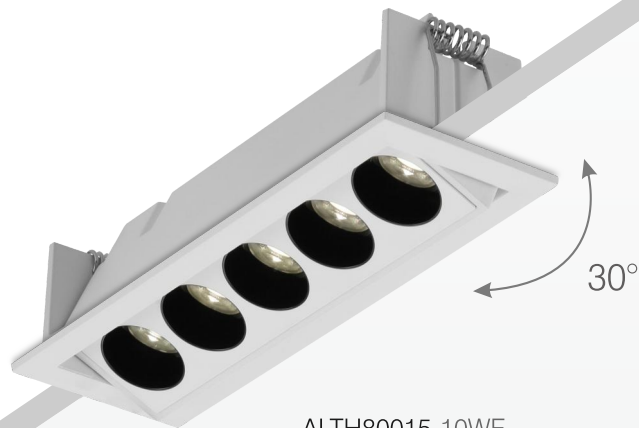

84



ALTH80015-20WF

COLOR FINISHINGS:



Black



White



Black



White

ALTH80014




9WY



9WF


ALTH80014-9WY

POWER: 9W
CRI: 90
LUMEN: 709Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø80*H38mm
HOLE SIZE: Ø85mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80014-9WF

POWER: 9W
CRI: 90
LUMEN: 727Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L72*W72*H60mm
HOLE SIZE: L75*W75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI



ALTH80014-9W



ANGLE 24°

OTHER VERSIONS




15°



38°

9W 24° 4000K

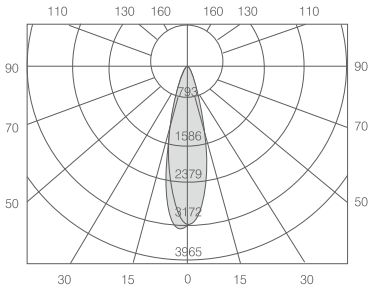

9W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3061,27	0,40/0,44	0,1	1356,78
2.0	765,32	0,81/0,88	0,6	339,19
3.0	340,14	1,21/1,32	1,3	150,75
4.0	191,33	1,61/1,77	2,3	84,80
5.0	122,45	2,02/2,21	3,6	54,27

Dv Beam Angle(B): H22.8 V24.9 Field angle(F): H42.2 V44.8




10WF



20WF

ALTH80015-10WF

POWER: 10W
CRI: 90
LUMEN: 916lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L158*W52*H42mm
HOLE SIZE: L150*W45mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM 0-10V



DALI

ALTH80015-20WF

POWER: 20W
CRI: 90
LUMEN: 1915lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L290*W52*H42mm
HOLE SIZE: L280*W45mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC




DIM 0-10V



DALI

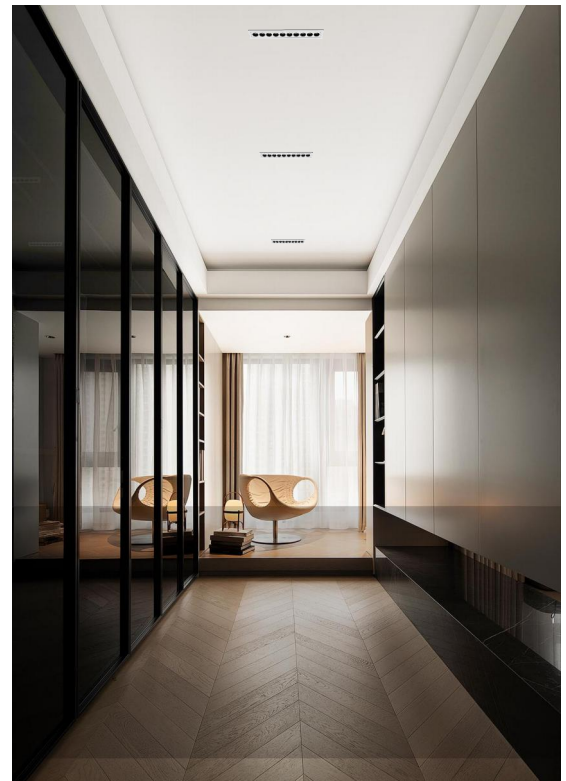


ALTH80015-10W




ANGLE 24°

OTHER VERSIONS



15° 38°

10W 24° 4000K

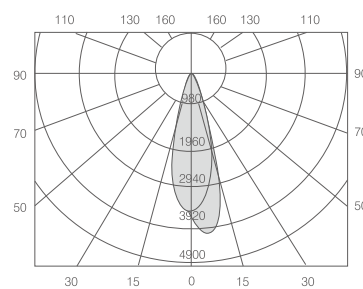


10W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3337.31	0.43/0.50	0.2	1521.12
2.0	834.33	0.87/1.01	0.8	380.28
3.0	370.81	1.30/1.51	1.7	169.01
4.0	208.58	2.17/2.52	3.0	95.07
5.0	133.49	2.60/3.02	4.7	60.84


Dv Beam Angle(B): H24.4 V28.2 Field angle(F): H43.8 V45.7

ALTH80015-20W




ANGLE 24°

OTHER VERSIONS



15° 38°

20W 24° 4000K

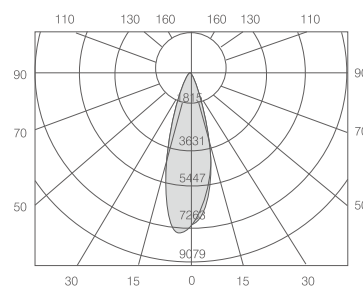


20W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	6875.83	0.50/0.48	0.2	3010.15
2.0	1718.96	1.00/0.96	0.8	752.54
3.0	763.98	1.50/1.43	1.7	334.46
4.0	429.74	2.00/1.91	3.1	188.13
5.0	275.03	2.50/2.39	4.8	120.41

Dv Beam Angle(B): H28.1 V26.9 Field angle(F): H46.0 V45.5

ALTH0740A

ReaLight

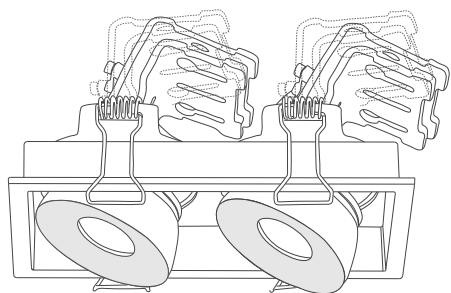

ALTH0740A-2*9WF

87



ALTH0740A-9WF



ALTH0740A-9WY



COLOR FINISHINGS:



White



Black



9WY




9WF



2*9WF


ALTH0740A-9WY

POWER: 9W
CRI: 90
LUMEN: 782Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø80*H89mm
HOLE SIZE: Ø72mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White




ALTH0740A-9WF

POWER: 9W
CRI: 90
LUMEN: 782Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L80*W80*H89mm
HOLE SIZE: L72*W72mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White



ALTH0740A-2*9WF

POWER: 2*9W
CRI: 90
LUMEN: 2*782Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L147*W80*H89mm
HOLE SIZE: L140*W72mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALTH0740A-9W



ANGLE 45°

9W 45° 4000K

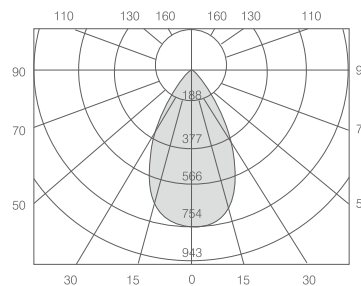


9W 45° 4000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	752.78	1.05/1.05	0.9	283.97
2.0	188.20	2.09/2.10	3.4	70.99
3.0	83.64	3.14/3.14	7.8	31.55
4.0	47.05	4.18/4.19	13.8	17.75
5.0	30.11	5.23/5.24	21.5	11.36

Dv Beam Angle(B):H55.2 V55.3 Field angle(F):H91.2V91.4

ALTH80007A

ReaLight

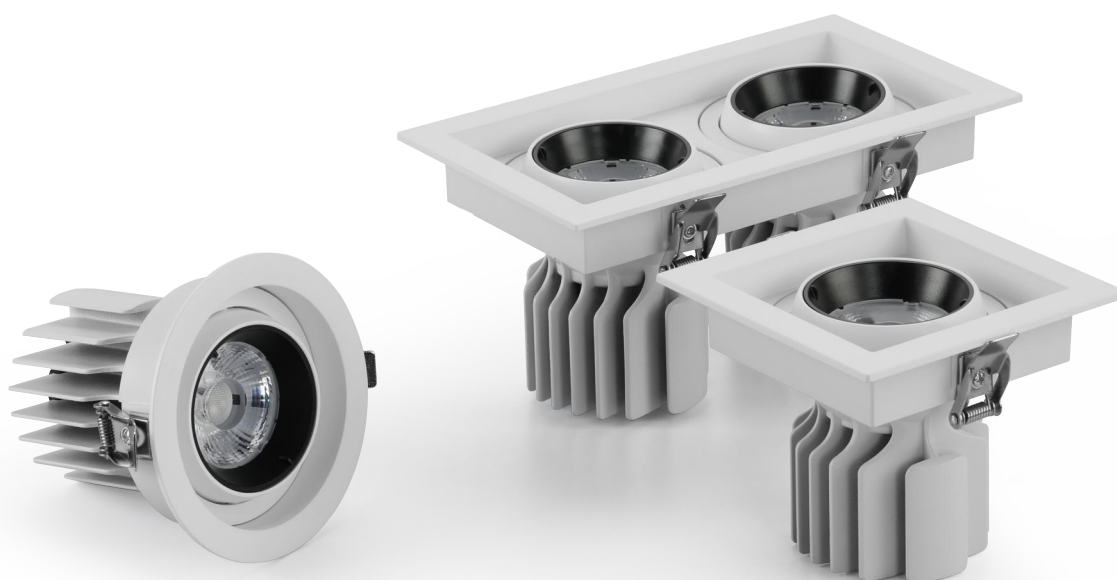

89

ALTH80007A SERIES

COLOR FINISHINGS:



White

Black



12WY




20WY



30WY


ALTH80007A-12WY

POWER: 12W
CRI: 90
LUMEN:1064Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø90*H80mm
HOLE SIZE:Ø75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALTH80007A-20WY

POWER: 20W
CRI: 90
LUMEN:1686Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø110*H105mm
HOLE SIZE:Ø95mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80007A-30WY

POWER: 30W
CRI: 90
LUMEN:2335Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø135*H125mm
HOLE SIZE:Ø115mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

ALTH80007A-12WY




ANGLE 24°

OTHER VERSIONS



15° 38°


12WY 24° 4000K

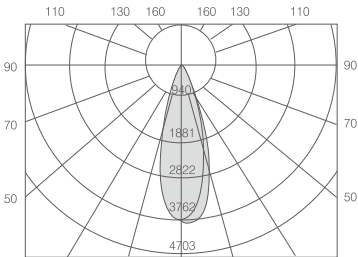

12WY 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3711.52	0.51/0.52	0.2	1607.68
2.0	927.88	1.03/1.03	0.9	401.92
3.0	412.39	1.54/1.55	1.9	178.63
4.0	231.97	2.06/2.07	3.4	100.48
5.0	148.46	2.57/2.59	5.3	64.31

ALTH80007A-20WY




ANGLE 24°

OTHER VERSIONS



15° 38°


20WY 24° 4000K

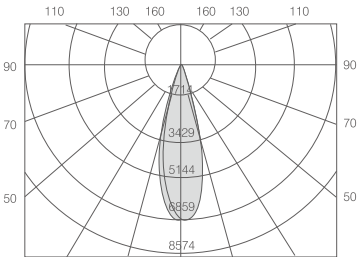

20WY 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	6809.60	0.47/0.48	0.2	2956.57
2.0	1702.40	0.95/0.95	0.7	739.14
3.0	756.62	1.42/1.43	1.6	328.51
4.0	425.60	1.89/1.90	2.8	184.79
5.0	272.38	2.36/2.38	4.4	118.26

ALTH80007-30WY




ANGLE 24°

OTHER VERSIONS



15° 38°

30WY 24° 4000K

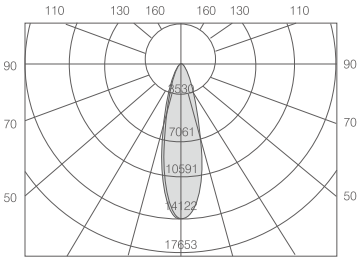

30WY 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	14087.60	0.41/0.41	0.1	6213.29
2.0	3521.90	0.81/0.83	0.5	1553.32
3.0	1565.29	1.22/1.24	1.2	690.37
4.0	880.48	1.63/1.65	2.1	388.33
5.0	563.50	2.04/2.07	3.3	248.53

ALTH80007A



12WF




20WF



30WF


ALTH80007A-12WF

POWER: 12W
CRI: 90
LUMEN: 1105Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L90*W90*H80mm
HOLE SIZE: 75*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALTH80007A-20WF

POWER: 20W
CRI: 90
LUMEN: 1686Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L117*W117*H105mm
HOLE SIZE: 95*95mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80007A-30WF

POWER: 30W
CRI: 90
LUMEN: 2334Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L140*W140*H125mm
HOLE SIZE: 120*120mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI


91

ALTH80007A-12WF




ANGLE 38°

OTHER VERSIONS



12WF 38° 4000K

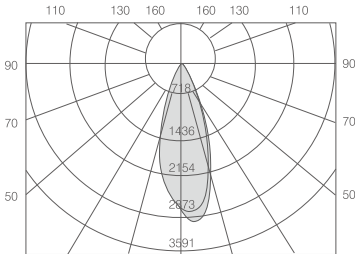


12WF 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2616.57	0.50/0.59	0.3	1161.71
2.0	654.14	1.01/1.19	1.0	290.43
3.0	290.73	1.51/1.78	2.3	129.08
4.0	163.54	2.02/2.38	4.1	72.61
5.0	104.66	2.52/2.97	6.3	46.47


Dv Beam Angle(B):H28.3 V33.1 Field angle(F):H56.7 V58.2

ALTH80007A-20WF




ANGLE 38°

OTHER VERSIONS



20WF 38° 4000K

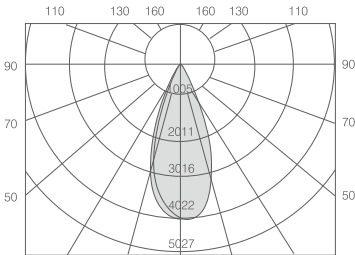


20WF 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3970.07	0.69/0.68	0.4	1654.18
2.0	992.52	1.37/1.36	1.5	413.55
3.0	441.12	2.06/2.04	3.3	183.80
4.0	248.13	2.74/2.72	5.9	103.39
5.0	158.80	3.43/3.40	9.2	66.17


Dv Beam Angle(B):H37.9 V37.5 Field angle(F):H57.7 V57.4

ALTH80015-30WF




ANGLE 38°

OTHER VERSIONS



30WF 38° 4000K

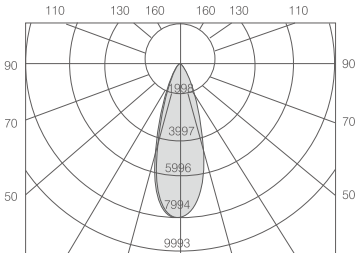

30WF 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	7965.88	0.55/0.54	0.2	3403.30
2.0	1991.47	1.10/1.09	0.9	850.83
3.0	885.10	1.65/1.63	2.1	378.14
4.0	497.87	2.20/2.18	3.8	212.71
5.0	318.64	2.75/2.72	5.9	136.13

Dv Beam Angle(B):H30.8 V30.4 Field angle(F):H50.1 V48.9



2*12WF




2*20WF



2*30WF


ALTH80007A-2*12WF

POWER: 2*12W
CRI: 90
LUMEN: 2078Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L170*W90*H80mm
HOLE SIZE: 155*75mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White





ALTH80007A-2*20WF

POWER: 2*20W
CRI: 90
LUMEN: 3408Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L210*W117*H105mm
HOLE SIZE: 190*95mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH80007A-2*30WF

POWER: 2*30W
CRI: 90
LUMEN: 4758Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L250*W140*H125mm
HOLE SIZE: 230*120mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White

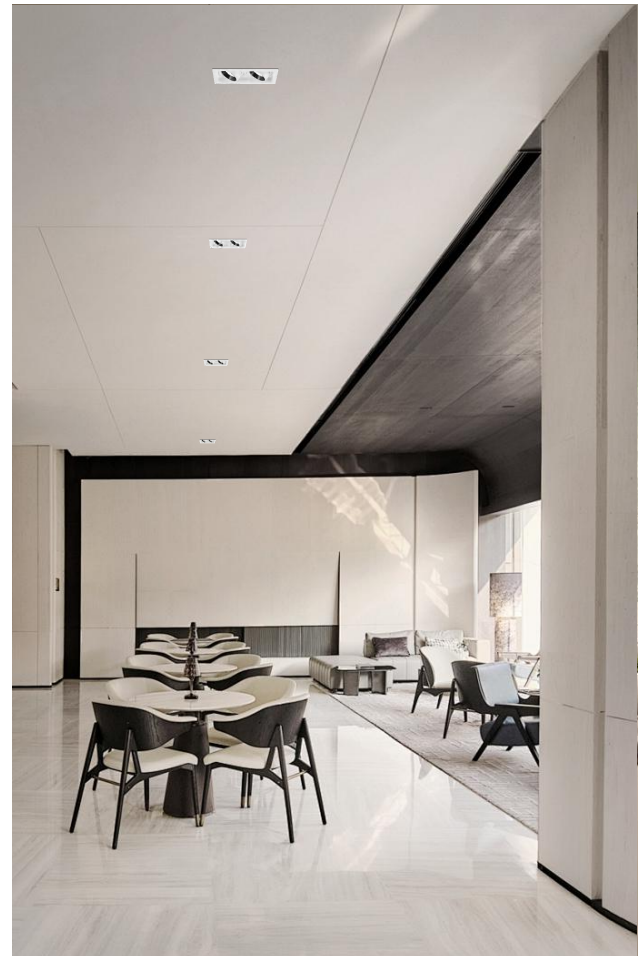

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALTH80007A-2X12WF



ANGLE 24°


OTHER VERSIONS



15°

38°

2X12WF 24° 4000K




2X12WF 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_R(m)	S_B(sq.m)	Eav_B(lx)
1.0	7624.58	0.52/0.52	0.2	3270.44
2.0	1906.14	1.04/1.03	0.8	847.61
3.0	847.18	1.57/1.55	1.9	363.38
4.0	476.54	2.09/2.06	3.4	204.40
5.0	304.98	2.61/2.58	5.3	130.82


Dv Beam Angle(B): H29.3 V28.9 Field angle(F): H48.5 V48.1

ALTH0769A

ReaLight



355°



COLOR FINISHINGS:



White+Black



Black+Black




2*7W



4*7W


ALTH0769A-2*7W

POWER: 2*7W
CRI: 90
LUMEN: 1135Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L112*W112*H88mm
HOLE SIZE: L100*W100mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black



ALTH0769A-4*7W

POWER: 4*7W
CRI: 90
LUMEN: 2286Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L194*W112*H88mm
HOLE SIZE: L180*W100mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI



ALTH0769A-7W




ANGLE 38°

OTHER VERSIONS



15° 24°

7W 38° 3000K

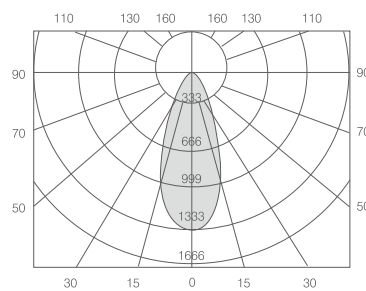

7W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1330.58	0.67/0.66	0.4	562.00
2.0	332.64	1.35/1.33	1.4	140.50
3.0	147.84	2.02/1.99	3.2	62.44
4.0	83.16	2.69/2.65	5.7	35.12
5.0	53.22	2.36/2.32	8.9	22.48

Dv Beam Angle(B):H37.2 V36.7 Field angle(F):H57.5 V56.8




IP54

ALIP80202 SERIES



96



COLOR FINISHINGS:



White



Black



ALIP80202



10W




20W



30W


ALIP80202-10W IP54

POWER: 10W
CRI: 90
LUMEN:999Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L100*W100*H86.5mm
HOLE SIZE:L90*W90mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White




ALIP80202-20W IP54

POWER: 20W
CRI: 90
LUMEN:1920Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L120*W120*H106.5mm
HOLE SIZE:L110*W110mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



ALIP80202-30W IP54

POWER: 30W
CRI: 90
LUMEN:2348Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L140*W140*H123.5mm
HOLE SIZE:L130*W130mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALIP80202-10W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

10W 36° 4000K




10W 36° 4000K

Dist.(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2700.34	0.65/0.64	0.3	1132.36
2.0	675.09	1.30/1.28	1.3	283.09
3.0	300.04	1.95/1.93	3.0	125.82
4.0	168.77	2.61/2.57	5.3	70.77
5.0	108.01	3.26/3.21	8.3	45.29


Dv Beam Angle(B):H35.1 V35.6 Field angle(F):H53.4 V52.8

ALIP80202-20W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

20W 36° 4000K




20W 36° 4000K

Dist.(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	5296.71	0.65/0.65	0.3	2239.43
2.0	1324.18	1.30/1.29	1.3	559.86
3.0	588.52	1.96/1.94	3.0	248.83
4.0	331.04	2.61/2.58	5.3	139.96
5.0	211.87	3.26/3.23	8.3	89.58


Dv Beam Angle(B):H36.1 V35.8 Field angle(F):H50.8 V50.9

ALIP80202-30W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

30W 36° 4000K



30W 36° 4000K

Dist.(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	7771.91	0.60/0.60	0.3	3287.55
2.0	1942.98	1.20/1.20	1.1	821.89
3.0	863.55	1.81/1.79	2.6	365.28
4.0	485.74	2.41/2.39	4.5	205.47
5.0	310.88	3.01/2.99	7.1	131.50


Dv Beam Angle(B):H33.5 V33.3 Field angle(F):H51.7 V51.5



2*10W

ALIP80202-2*10W IP54


POWER: 2*10W
CRI: 90
LUMEN:1998Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L180*W100*H86.5mm
HOLE SIZE:L170*W90mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



2*20W

ALIP80202-2*20W IP54


POWER: 2*20W
CRI: 90
LUMEN:3840Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L220*W120*H106.5mm
HOLE SIZE:L210*W110mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



2*30W

ALIP80202-2*30W IP54

POWER: 2*30W
CRI: 90
LUMEN:4696Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L260*W140*H123.5mm
HOLE SIZE:L250*W130mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALIP80202-2*10W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

10W 36° 4000K




10W 36° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2700.34	0.65/0.64	0.3	1132.36
2.0	675.09	1.30/1.28	1.3	283.09
3.0	300.04	1.95/1.93	3.0	125.82
4.0	168.77	2.61/2.57	5.3	70.77
5.0	108.01	3.26/3.21	8.3	45.29


Dv Beam Angle(B):H35.1 V35.6 Field angle(F):H53.4 V52.8

ALIP80202-2*20W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

20W 36° 4000K




20W 36° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	5296.71	0.65/0.65	0.3	2239.43
2.0	1324.18	1.30/1.29	1.3	559.86
3.0	588.52	1.96/1.94	3.0	248.83
4.0	331.04	2.61/2.58	5.3	139.96
5.0	211.87	3.26/3.23	8.3	89.58


Dv Beam Angle(B):H35.1 V35.6 Field angle(F):H53.4 V52.9

ALIP80202-2*30W




ANGLE 36°

OTHER VERSIONS



15° 24° 50°

30W 36° 4000K



30W 36° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	7771.91	0.60/0.60	0.3	3287.55
2.0	1942.98	1.20/1.20	1.1	821.89
3.0	863.55	1.81/1.79	2.6	365.28
4.0	485.74	2.41/2.39	4.5	205.47
5.0	310.88	3.01/2.99	7.1	131.50

Dv Beam Angle(B):H35.5 V33.3 Field angle(F):H51.7 V51.5



ReaLight

99



IP54


ALIP80203 SERIES



COLOR FINISHINGS:



White



Black



ALIP80203



10W




20W



30W


ALIP80203-10W IP54

POWER: 10W
CRI: 90
LUMEN: 999lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L84.5*W84.5*H85mm
HOLE SIZE: L90*W90mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White




ALIP80203-20W IP54

POWER: 20W
CRI: 90
LUMEN: 1920lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L104.5*W104.5*H105mm
HOLE SIZE: L110*W110mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



ALIP80203-30W IP54

POWER: 30W
CRI: 90
LUMEN: 2348lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L124.5*W124.5*H122mm
HOLE SIZE: L130*W130mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALIP80203-10W



ANGLE 36°

OTHER VERSIONS




15°


24°

50°


10W 36° 4000K



10W 36° 4000K




ALIP80203-20W



ANGLE 36°

OTHER VERSIONS




15°


24°

50°


20W 36° 4000K



20W 36° 4000K




ALIP80203-30W



ANGLE 36°

OTHER VERSIONS




15°


24°

50°

30W 36° 4000K



30W 36° 4000K






2*10W

ALIP80203-2*10W IP54


POWER: 2*10W
CRI: 90
LUMEN:1998Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L164.5*W84.5*H85mm
HOLE SIZE:L170*W90mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



2*20W

ALIP80203-2*20W IP54


POWER: 2*20W
CRI: 90
LUMEN:3840Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L204.5*W104.5*H105mm
HOLE SIZE:L210*W110mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



2*30W

ALIP80203-2*30W IP54

POWER: 2*30W
CRI: 90
LUMEN:4696Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L244.5*W124.5*H122mm
HOLE SIZE:L250*W130mm
BEAM ANGLE: 15°/24°/36°/50°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALIP80203-2*10W



ANGLE 36°

OTHER VERSIONS




15°

24°

50°


10W 36° 4000K



10W 36° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2700.34	0.65/0.64	0.3	1132.36
2.0	675.09	1.30/1.28	1.3	283.09
3.0	300.04	1.95/1.93	3.0	125.82
4.0	168.77	2.61/2.57	5.3	70.77
5.0	108.01	3.26/3.21	8.3	45.29

ALIP80203-2*20W



ANGLE 36°

OTHER VERSIONS




15°

24°

50°


20W 36° 4000K



20W 36° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	5296.71	0.65/0.65	0.3	2239.43
2.0	1324.18	1.30/1.29	1.3	559.86
3.0	588.52	1.96/1.94	3.0	248.83
4.0	331.04	2.61/2.58	5.3	139.96
5.0	211.87	3.26/3.23	8.3	89.58

ALIP80203-2*30W



ANGLE 36°

OTHER VERSIONS




15°

24°

50°

30W 36° 4000K



30W 36° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	7771.91	0.60/0.60	0.3	3287.55
2.0	1942.98	1.20/1.20	1.1	821.89
3.0	863.55	1.81/1.79	2.6	365.28
4.0	485.74	2.41/2.39	4.5	205.47
5.0	310.88	3.01/2.99	7.1	131.50

ALTH80224



10W



25W



15W



35W

103

COLOR FINISHINGS

Lamp body:Black/White



Black + Black



White + White

Anti-glare cup



Black




White




Gold

ALTH80224-10W




ANGLE 45°

OTHER VERSIONS



10W 45° 3000K



10W 45° 3000K


Dist(m)	Ena(dm)(lx)	Dh(Di)(m)	S _d (sq.m)	Eav(Btk)
1.0	1543.98	0.85/0.85	0.6	615.77
2.0	385.99	1.69/1.70	2.3	153.94
3.0	171.55	2.54/2.56	6.1	68.42
4.0	96.50	3.39/3.41	9.1	38.49
5.0	61.76	4.24/4.26	14.2	24.63

Dv Beam Angle(B) H45.9 V46.2 Field angle(F): H59.9 V50.0




ALTH80224-10W

POWER: 10W
CRI: 90
LUMEN: 1001Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L93*W53*H61mm
HOLE SIZE: L87*W45mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALTH80224-25W

POWER: 25W
CRI: 90
LUMEN: 2264Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L213*W53*H61mm
HOLE SIZE: L207*W45mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALTH80224-15W

POWER: 15W
CRI: 90
LUMEN: 1505Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L133*W53*H61mm
HOLE SIZE: L127*W45mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



ALTH80224-35W

POWER: 35W
CRI: 90
LUMEN: 3278Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L293*W53*H61mm
HOLE SIZE: L287*W45mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

ALTH80225



105



COLOR FINISHINGS

Lamp body: Black/White



Black+Black



White+White

Anti-glare cup



Black




White




Gold

ALTH80225-10W




ANGLE 45°

OTHER VERSIONS



10W 45° 3000K



10W 45° 3000K


Dist(m)	Enrad(ka)	Dv(Dv_B(m))	S_B(sq.m)	Enr_B(k)
1.0	1797.85	0.85/0.85	0.6	717.02
2.0	449.46	1.69/1.70	2.3	179.26
3.0	199.76	2.54/2.56	5.1	79.67
4.0	112.37	3.39/3.41	9.1	44.81
5.0	71.94	4.24/4.26	14.2	28.68

Dv: Beam Angle(°): H45.9 V45.2 Field angle(F): H59.9 V60.0




ALTH80225-10W

POWER: 10W
CRI: 90
LUMEN: 1001Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L106*W75*H71.5mm
HOLE SIZE: L100*W65mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALTH80225-25W

POWER: 25W
CRI: 90
LUMEN: 2264Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L226*W75*H71.5mm
HOLE SIZE: L220*W65mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALTH80225-15W

POWER: 15W
CRI: 90
LUMEN: 1505Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L146*W75*H71.5mm
HOLE SIZE: L140*W65mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



ALTH80225-35W

POWER: 35W
CRI: 90
LUMEN: 3278Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L306*W75*H71.5mm
HOLE SIZE: L300*W65mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI

ALTH80118

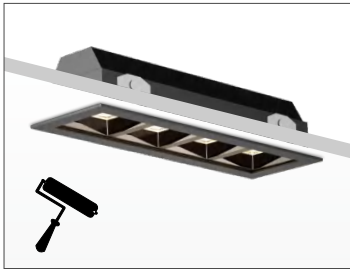


ALTH80118

107



ALTH80119

ALTH80118-10W/ALTH80119-10W




ANGLE 65°

OTHER VERSIONS






80°

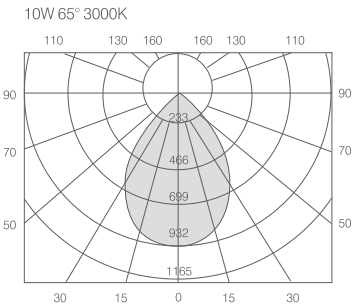

10W 65° 3000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	931.05	1.37/1.38	1.5	314.08
2.0	232.76	2.73/2.77	5.9	78.52
3.0	103.45	4.10/4.15	13.4	34.90
4.0	58.19	5.46/5.53	23.8	19.63
5.0	37.24	6.83/6.91	37.1	12.56

Dv Beam Angle(B):H68.6 V69.3 Field angle(F):H83.7 V84.5

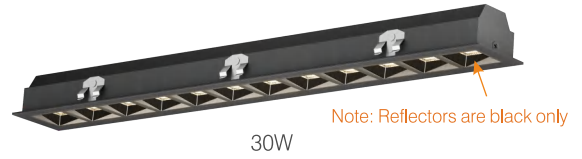


ALTH80118-10W

POWER: 10W
CRI: 90
LUMEN: 1111Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L180*W60*H42.5mm
HOLE SIZE: L170*W53mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black




ALTH80118-15W

POWER: 15W
CRI: 90
LUMEN: 1674Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L260*W60*H42.5mm
HOLE SIZE: L250*W53mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black



ALTH80118-30W

POWER: 30W
CRI: 90
LUMEN: 3236Lm/4000K
CCT: 3000K/4000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L500*W60*H42.5mm
HOLE SIZE: L490*W53mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black

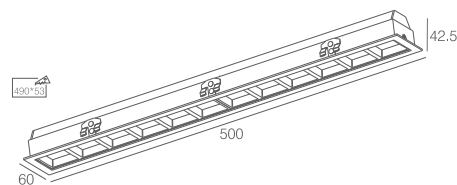

108

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS:



Black



White+Black

ALTH80119



10W




15W

Note: Reflectors are black only


ALTH80119-10W

POWER: 10W
CRI: 90
LUMEN:1111Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: LL187*W67*H41mm
HOLE SIZE:L176*W59mm
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black



ALTH80119-15W

POWER: 15W
CRI: 90
LUMEN:1674Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: LL267*W67*H41mm
HOLE SIZE:L256*W53mm
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black



109

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS:




Black



White+Black

ALTH80119-10W




ANGLE 65°

OTHER VERSIONS



80°

10W 65° 3000K

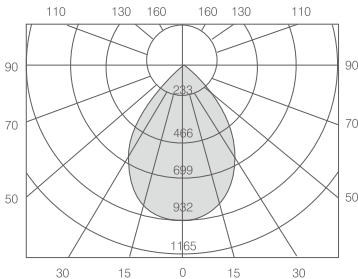


10W 65° 3000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lk)
1.0	931.05	1.37/1.38	1.5	314.08
2.0	232.76	2.73/2.77	5.9	78.52
3.0	103.45	4.10/4.15	13.4	34.90
4.0	58.19	5.46/5.53	23.8	19.63
5.0	37.24	6.83/6.91	37.1	12.56

Dv Beam Angle(B):H68.6 V69.3 Field angle(F):H83.7 V84.5

ALTH80119-15W




ANGLE 65°

OTHER VERSIONS



80°


15W 65° 3000K

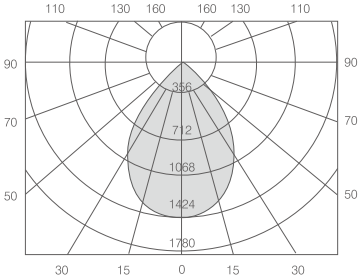

15W 65° 3000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lk)
1.0	1423.37	1.37/1.34	1.4	483.69
2.0	355.84	2.74/2.68	5.8	120.92
3.0	158.15	4.10/4.02	13.0	53.74
4.0	88.96	5.47/5.37	23.4	30.23
5.0	56.93	6.84/6.71	36.0	19.35

Dv Beam Angle(B):H68.7 V67.7 Field angle(F):H84.1 V82.9

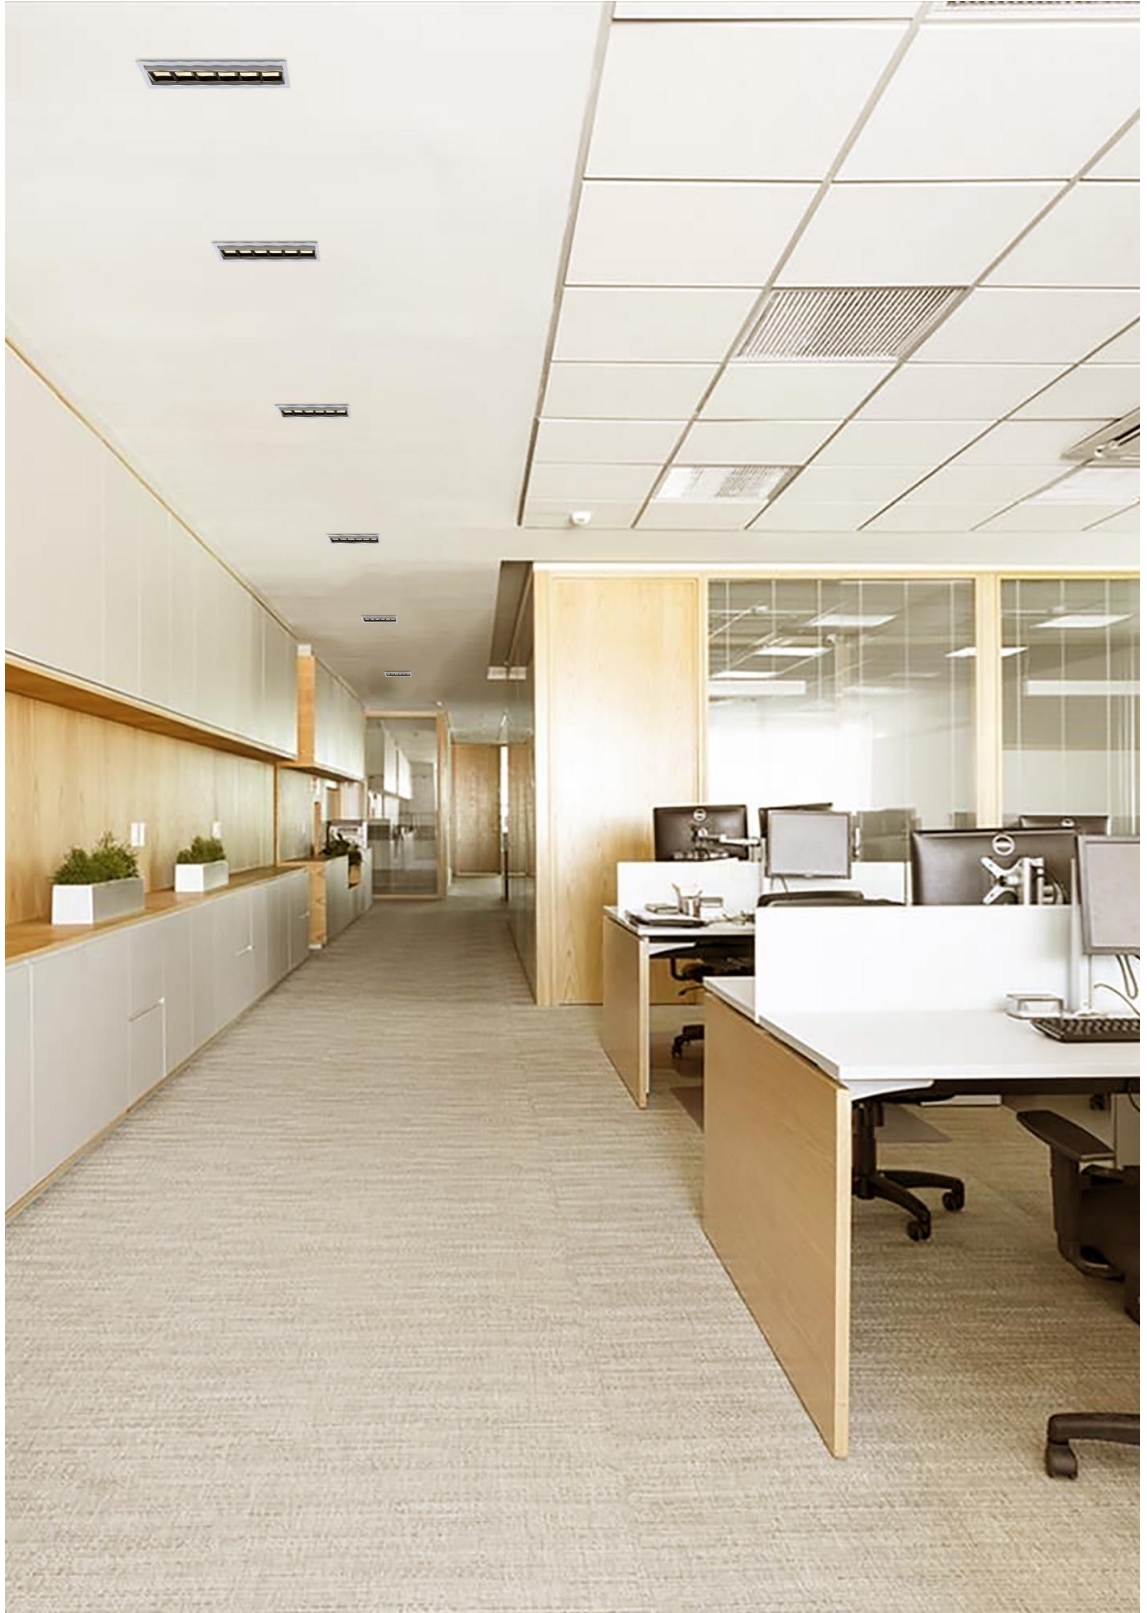

ALTH0771A

ReaLight



111






5W

ALTH0771A-5WY

POWER: 5W
CRI: 90
LUMEN: 430Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø65*H80mm
HOLE SIZE: Ø55mm
BEAM ANGLE: 15/24/38/50°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC



DIM 0-10V



DALI



ALTH0771A-5WY



ANGLE 38°

OTHER VERSIONS




15°

24°

50°

5W 38° 3000K

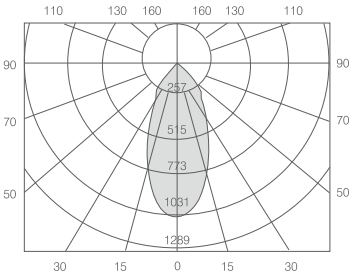

5W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1028.01	0.66/0.67	0.4	427.99
2.0	247.00	1.33/1.34	1.4	107.00
3.0	114.22	1.99/2.01	3.2	47.55
4.0	64.25	2.66/2.67	5.6	26.75
5.0	41.12	3.32/3.34	8.8	17.12

Dv Beam Angle(B): H36.8 V37.0 Field angle(F): H55.9 V55.4

ALTH0731A

ReaLight



113



ALTH0731A SERIES



7W



10W



15W




25W



35W


ALTH0731A-7WY

POWER: 7W
CRI: 90
LUMEN: 573Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø72*H110mm
HOLE SIZE: Ø65mm
BEAM ANGLE (Lens) : 15°/24°/38°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black




ALTH0731A-10WY

POWER: 10W
CRI: 90
LUMEN: 856Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H102mm
HOLE SIZE: Ø75mm
BEAM ANGLE (Lens) : 10°/24°/38°/50°
BEAM ANGLE (Reflector) : 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black




ALTH0731A-15WY

POWER: 15W
CRI: 90
LUMEN: 1289Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø103*H112mm
HOLE SIZE: Ø90-95mm
BEAM ANGLE (Lens) : 10°/24°/38°/50°
BEAM ANGLE (Reflector) : 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black




ALTH0731A-25WY

POWER: 25W
CRI: 90
LUMEN: 2208Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø130*H135mm
HOLE SIZE: Ø120mm
BEAM ANGLE (Lens) : 15°/24°/38°/60°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



ALTH0731A-35WY

POWER: 35W
CRI: 90
LUMEN: 3086Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø160*H155mm
HOLE SIZE: Ø140mm
BEAM ANGLE (Lens) : 10°/24°/38°/45°/60°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



COLOR FINISHINGS:

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI



Lens : White+Black



Black



Reflector : White+Black



Black

ALTH0731A



7W




15W



25W

ALTH0731A-7WF


POWER: 7W
CRI: 90
LUMEN: 573Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L72*W72*H110mm
HOLE SIZE: L65*W65mm
BEAM ANGLE (Lens) : 15°/24°/38°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



115


ALTH0731A-15WF

POWER: 15W
CRI: 90
LUMEN: 1289Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L100*W100*H112mm
HOLE SIZE: L90*W90mm
BEAM ANGLE (Lens) : 10°/24°/38°/50°
BEAM ANGLE (Reflector) : 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black



ALTH0731A-25WF

POWER: 25W
CRI: 90
LUMEN: 2208Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L130*W130*H135mm
HOLE SIZE: L120*W120mm
BEAM ANGLE (Lens) : 15°/24°/38°/60°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



COLOR FINISHINGS:

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI



Lens : White+Black



Black



Reflector : White+Black



Black



2*7W



2*10W



2*15W




2*25W



2*35W



ALTH0731A-2*7WF

POWER: 2*7W
CRI: 90
LUMEN: 2*573Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L131*W72*H110mm
HOLE SIZE: L121*W65mm
BEAM ANGLE (Lens) : 15°/24°/38°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



ALTH0731A-2*10WF


POWER: 2*10W
CRI: 90
LUMEN: 2*856Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L174*W85*H102mm
HOLE SIZE: L160*W75mm
BEAM ANGLE (Lens) : 10°/24°/38°/50°
BEAM ANGLE (Reflector) : 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black

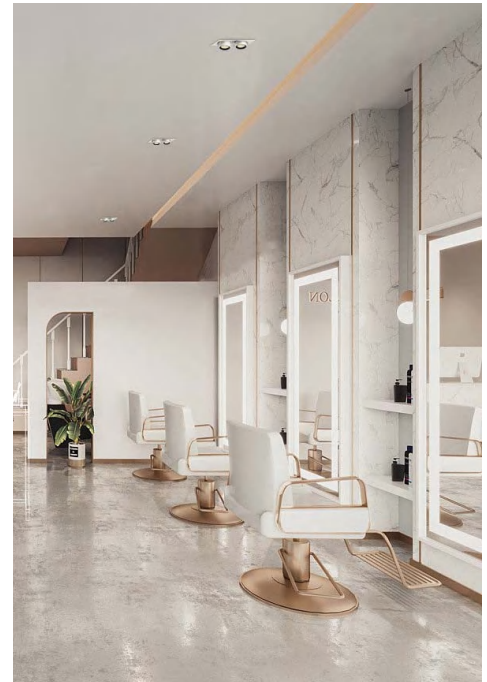

116


ALTH0731A-2*15WF

POWER: 2*15W
CRI: 90
LUMEN: 2*1289Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L185*W100*H112mm
HOLE SIZE: L175*W90mm
BEAM ANGLE (Lens) : 10°/24°/38°/50°
BEAM ANGLE (Reflector) : 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black




ALTH0731A-2*25WF

POWER: 2*25W
CRI: 90
LUMEN: 2*2208Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L240*W130*H135mm
HOLE SIZE: L230*W120mm
BEAM ANGLE (Lens) : 15°/24°/38°/60°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



ALTH0731A-2*35WF

POWER: 2*35W
CRI: 90
LUMEN: 2*3086Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L295*W160*H155mm
HOLE SIZE: L280*W140mm
BEAM ANGLE (Lens) : 10°/24°/38°/45°/60°
BEAM ANGLE (Reflector) : 15°/24°/38°
FINISHED COLOR: White+Black/Black



COLOR FINISHINGS:

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI



Lens : White+Black



Black




Reflector : White+Black



Black

ALTH0587A

ReaLight

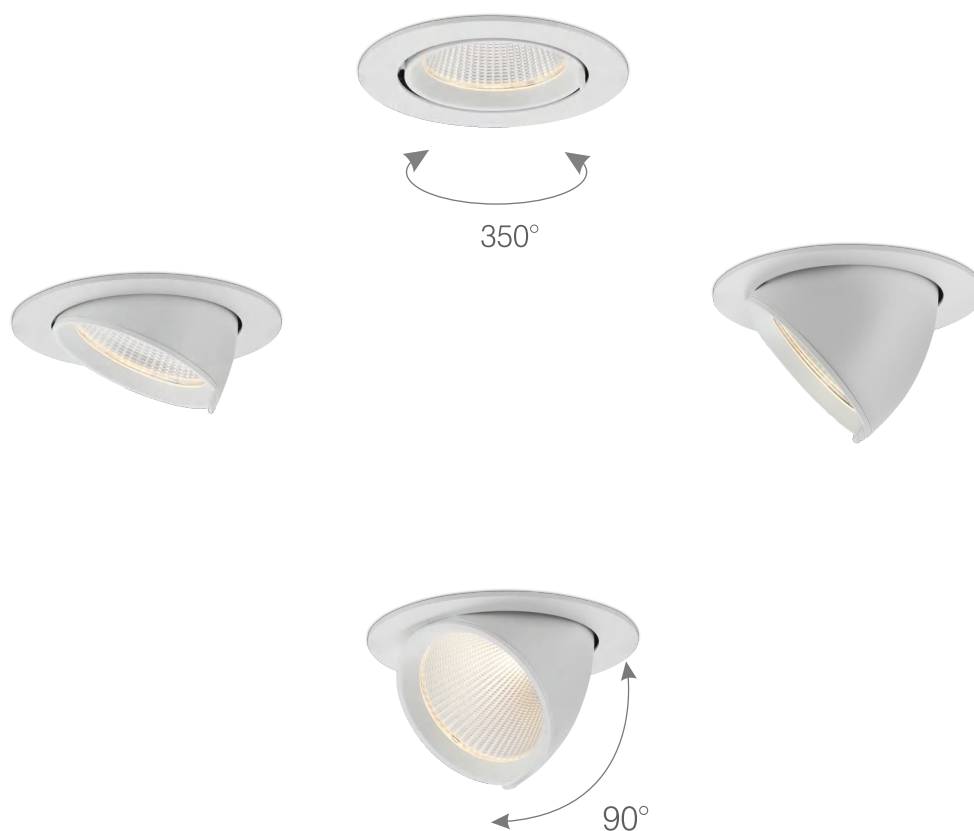

117

ALTH0587A SERIES

COLOR FINISHINGS:



Black



White



12W



20W



30W




40W



60W


ALTH0587A-12WY

POWER: 12W
CRI: 90
LUMEN: 1092Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø100*H92mm
HOLE SIZE: Ø90mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White




ALTH0587A-20WY

POWER: 20W
CRI: 90
LUMEN: 1954Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø130*H116mm
HOLE SIZE: Ø120mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White




ALTH0587A-30WY

POWER: 30W
CRI: 90
LUMEN: 2928Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø150*H140mm
HOLE SIZE: Ø140mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White



ALTH0587A-40WY

POWER: 40W
CRI: 90
LUMEN: 3695Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø150*H140mm
HOLE SIZE: Ø140mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

ALTH0587A-60WY

POWER: 60W
CRI: 90
LUMEN: 5876Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø190*H160mm
HOLE SIZE: Ø175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF


OTHER VERSIONS




DIM 0-10V



DALI

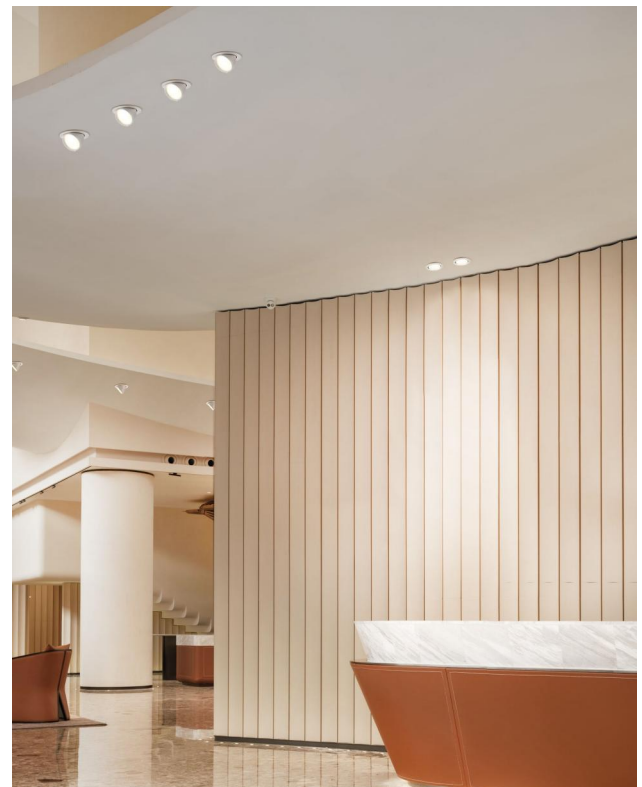


ALTH0587A-12W



ANGLE 38°

OTHER VERSIONS




15°

24°

60°

12W 38° 4000K

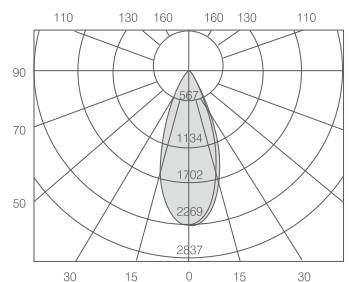



12W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2264.12	0.71/0.71	0.4	933.28
2.0	566.03	1.42/1.42	1.6	233.32
3.0	251.57	2.13/2.12	3.6	103.70
4.0	141.51	2.84/2.83	6.3	58.33
5.0	90.56	3.55/3.54	9.9	37.33

Dv Beam Angle(B): H39.1 V39.0 Field angle(F): H64.8 V64.6

ALTH0741A

ReaLight

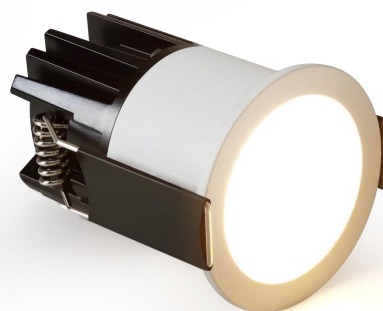

ALTH0741A SERIES




8WY



8WF


ALTH0741A-8WY

POWER: 8W
CRI: 90
LUMEN: 610Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø56*H70mm
HOLE SIZE: Ø50mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White+Black



ALTH0741A-8WF

POWER: 8W
CRI: 90
LUMEN: 616Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L56*W56*H70mm
HOLE SIZE: L50*W50mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White+Black



120

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DALI

COLOR FINISHINGS:



Black



White+Black




Black



White+Black

ALTH0741A-8WY/F




ANGLE 38°

OTHER VERSIONS



15° 24°

30W 38° 4000K

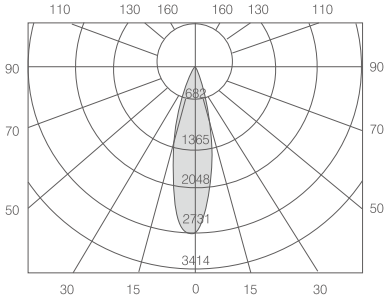

30W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2671.81	0.40/0.39	0.1	1197.25
2.0	667.95	0.79/0.79	0.5	299.31
3.0	296.87	1.19/1.18	1.1	133.03
4.0	166.99	1.58/1.57	2.0	74.89
5.0	106.87	1.96/1.96	3.1	47.89

ALIP0903A

ReaLight



IP54



121

ALIP0903A SERIES

COLOR FINISHINGS:



Black



White



Black



White




5WY



5WF


ALIP0903A-5WY IP54

POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø54*H40mm
HOLE SIZE:Ø45mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: Black/White



ALIP0903A-5WF IP54

POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L55*W55*H40mm
HOLE SIZE:L45*W45mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF



ALIP0903A-5WY/F




ANGLE 40°

OTHER VERSIONS





20° 60°

5W 40° 3000K

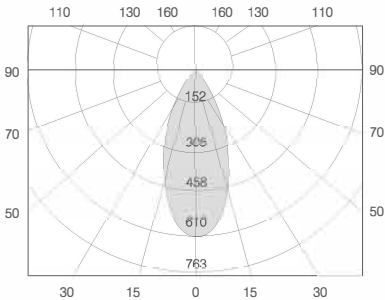

5W 40° 3000K

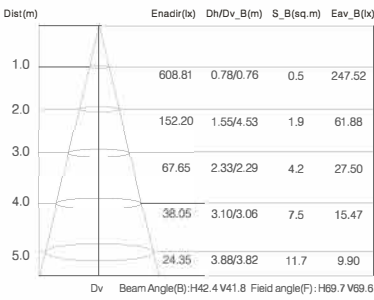



0909 SERIES



124

COLOR FINISHINGS:



ALTH0909A/ALIP0909A



ALTH0909B/ALIP0909B



ALTH0909C/ALIP0909C



0909



10W



10W

COLOR FINISHINGS:




Black



White+Black


ALIP0909A-10WY **IP54**
ALTH0909A-10WY

POWER: 10W
CRI: 90
LUMEN: 895Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H80mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: White+Black



ALIP0909B-10WY **IP54**
ALTH0909B-10WY

POWER: 10W
CRI: 90
LUMEN: 945Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø94*H75mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: White+Black/Black



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI



ALIP0909A-10WY/ALTH0909A-10WY



ANGLE 24°

OTHER VERSIONS



15°




38°



60°

10W 24° 3000K

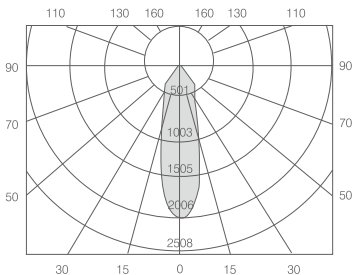


10W 24° 3000K

Dist(m)	Enadir(k)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	1993.23	0.43/0.42	0.1	877.10
2.0	498.31	0.85/0.85	0.6	219.28
3.0	221.47	1.28/1.27	1.3	97.46
4.0	124.58	1.71/1.70	2.3	54.82
5.0	79.73	2.14/2.12	3.6	35.08

Dv Beam Angle(B): H24.1 V24.0 Field angle(F): H73.7 V73.7

ALIP0909B-10WY/ALTH0909B-10WY



ANGLE 38°

OTHER VERSIONS



15°




24°



60°

10W 38° 3000K

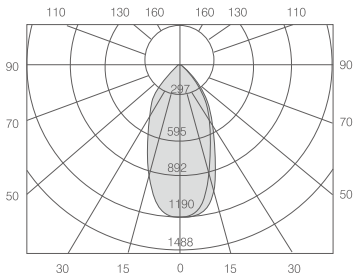

10W 38° 3000K

Dist(m)	Enadir(k)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	1178.37	0.80/0.79	0.5	477.89
2.0	294.59	1.60/1.58	2.0	119.47
3.0	130.93	2.39/2.37	4.5	53.10
4.0	73.65	3.19/3.15	8.0	29.87
5.0	47.13	3.99/3.94	12.5	19.12

Dv Beam Angle(B): H43.5 V43.0 Field angle(F): H82.4 V82.3




5W



10W

ALIP0909C-5WY IP54
ALTH0909C-5WY

POWER: 5W
CRI: 90
LUMEN: 388Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45*H43mm
HOLE SIZE: Ø35mm
BEAM ANGLE: 15°/38°
FINISHED COLOR: White+Black




RECOMMEND



ON/OFF

ALIP0909C-10WY IP54
ALTH0909C-10WY

POWER: 10W
CRI: 90
LUMEN: 845Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø86*H80mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: White+Black



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI



ALIP0909C-5WY/ALTH0909C-5WY




ANGLE 38°

OTHER VERSIONS




15°


5W 38° 3000K

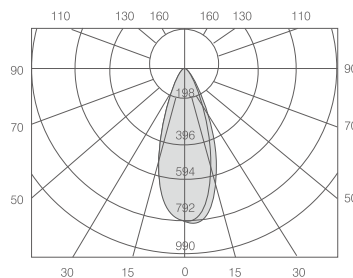

5W 38° 3000K

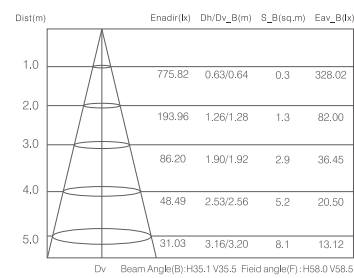

ALIP0909C-10WY/ALTH0909C-10WY



ANGLE 24°

OTHER VERSIONS




15°


38°

60°

10W 24° 3000K

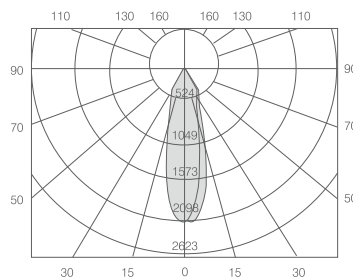

10W 24° 3000K

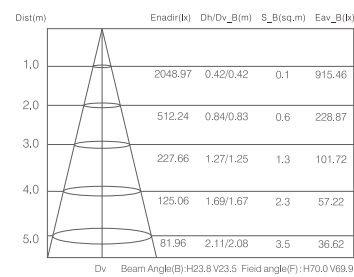

ALTH0750A




5W



9W

ALTH0750A-5W

POWER: 5W
CRI: 90
LUMEN:353Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø40*H55mm
HOLE SIZE:Ø35mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: White+Black




RECOMMEND



ON/OFF

ALTH0750A-9W

POWER: 9W
CRI: 90
LUMEN:858Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*H82mm
HOLE SIZE:Ø55mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: White+Black



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI




ALTH0750A-5W




ANGLE 24°

OTHER VERSIONS



5W 24° 4000K

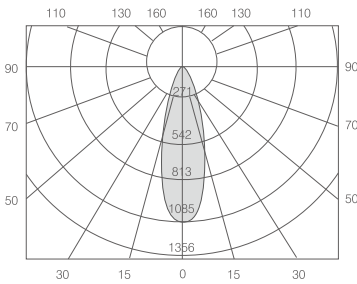


5W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1085.23	0.51/0.64	0.2	465.36
2.0	271.31	1.02/1.02	0.8	116.34
3.0	120.58	1.53/1.54	1.8	51.71
4.0	67.83	2.04/2.05	3.3	29.08
5.0	43.41	2.55/2.56	5.1	18.61


Dv Beam Angle(B):H28.6 V28.7 Field angle(F):H52.4 V52.4

ALTH0750A-9W




ANGLE 24°

OTHER VERSIONS



9W 24° 4000K

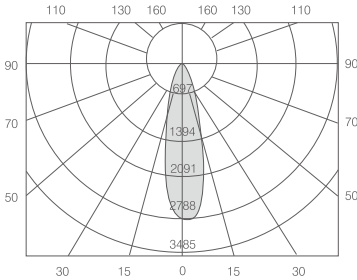

9W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2721.92	0.41/0.41	0.1	1219.18
2.0	680.48	0.81/0.81	0.5	304.80
3.0	302.44	1.22/1.22	1.2	135.46
4.0	170.12	1.62/1.62	2.1	76.20
5.0	108.88	2.03/2.03	3.3	48.77

Dv Beam Angle(B):H22.9 V23.0 Field angle(F):H56.3 V56.2



3W




5W



8W

ALTH80114-3W


POWER: 3W
CRI: 90
LUMEN:105Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø50*H40mm
HOLE SIZE:Ø30mm
BEAM ANGLE: 38°
FINISHED COLOR: Black+White/Black



RECOMMEND




ON/OFF

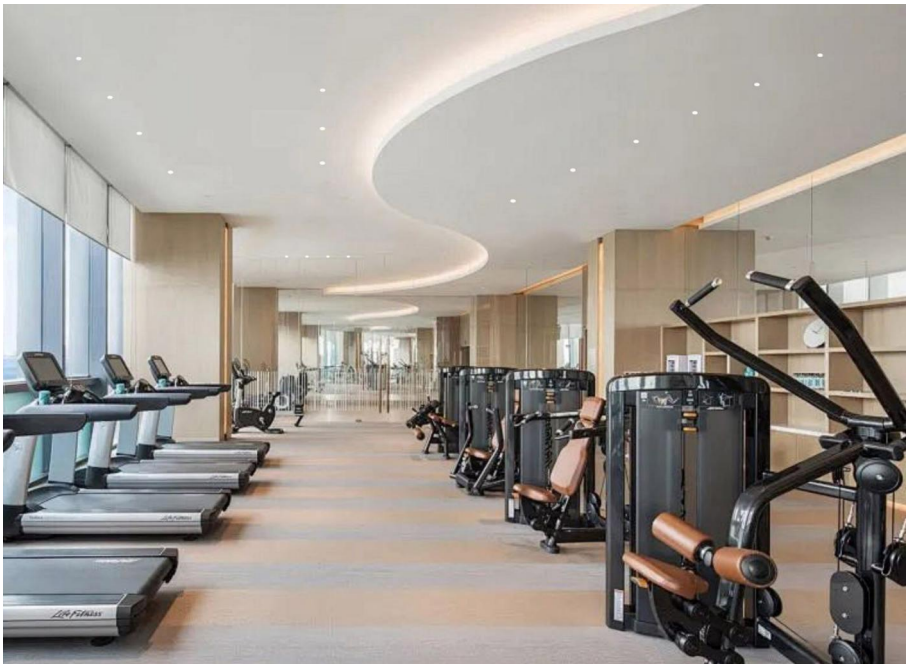

ALTH80114-5W

POWER: 5W
CRI: 90
LUMEN:404Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*H54mm
HOLE SIZE:Ø40mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black+White/Black



RECOMMEND



ON/OFF

OTHER VERSIONS




DIM 0-10V



DALI

ALTH80114-8W

POWER: 8W
CRI: 90
LUMEN:560Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø70*H75mm
HOLE SIZE:Ø50mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black+White/Black



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V




DALI

ALTH80114-3W



ANGLE 38°

3W 38° 3000K

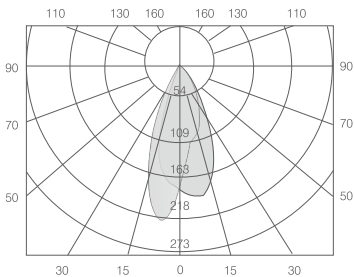

3W 38° 3000K

Dist(m)	Enadir(lx)	Ch/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	169.57	0.77/0.46	0.4	75.47
2.0	42.39	1.54/0.92	1.7	18.87
3.0	18.84	2.31/1.39	3.8	8.39
4.0	10.60	3.08/1.85	6.8	4.72
5.0	6.78	3.85/2.31	10.6	3.02

ALTH80115



3W




5W



8W

ALTH80115-3W

POWER: 3W
CRI: 90
LUMEN: 105Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø30*H39mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 38°
FINISHED COLOR: Black+White/Black




RECOMMEND



ON/OFF

ALTH80115-5W

POWER: 5W
CRI: 90
LUMEN: 404Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø40*H53mm
HOLE SIZE: Ø35mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black+White/Black



RECOMMEND



ON/OFF

OTHER VERSIONS




DIM 0-10V



DALI

ALTH80115-8W

POWER: 8W
CRI: 90
LUMEN: 560Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø50*H75mm
HOLE SIZE: Ø45mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black+White/Black



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI


129

ALTH80115-3W



ANGLE 38°

ALTH80115-5W




ANGLE 38°

OTHER VERSIONS



24°

ALTH80115-8W




ANGLE 38°

OTHER VERSIONS



24°

3W 38° 3000K

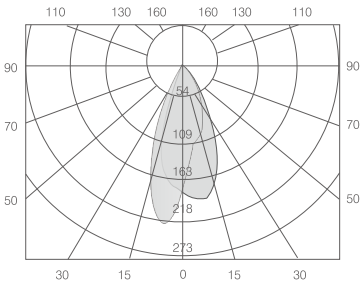


3W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	169.57	0.77/0.46	0.4	75.47
2.0	42.39	1.54/0.92	1.7	18.87
3.0	18.84	2.31/1.39	3.8	8.39
4.0	10.60	3.08/1.85	6.8	4.72
5.0	6.78	3.85/2.31	10.6	3.02

Dv Beam Angle(B):H42.1 V26.0 Field angle(F):H67.7 V63.7

5W 38° 3000K




5W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	806.50	0.73/0.72	0.4	338.03
2.0	201.63	1.47/1.44	1.7	84.51
3.0	89.61	2.20/2.17	3.9	37.56
4.0	50.41	2.94/2.89	7.0	21.13
5.0	32.26	3.67/3.61	10.9	13.52

Dv Beam Angle(B):H40.3 V39.7 Field angle(F):H61.8 V61.6

8W 38° 3000K

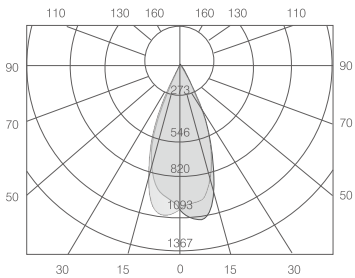

8W 38° 3000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1008.56	0.75/0.77	0.5	422.08
2.0	252.14	1.51/1.53	1.9	105.52
3.0	112.06	2.26/2.30	4.2	46.90
4.0	63.03	3.02/3.06	7.5	26.38
5.0	40.34	3.77/3.83	11.8	16.88

Dv Beam Angle(B):H41.3 V41.9 Field angle(F):H63.6 V64.3





80005 SERIES

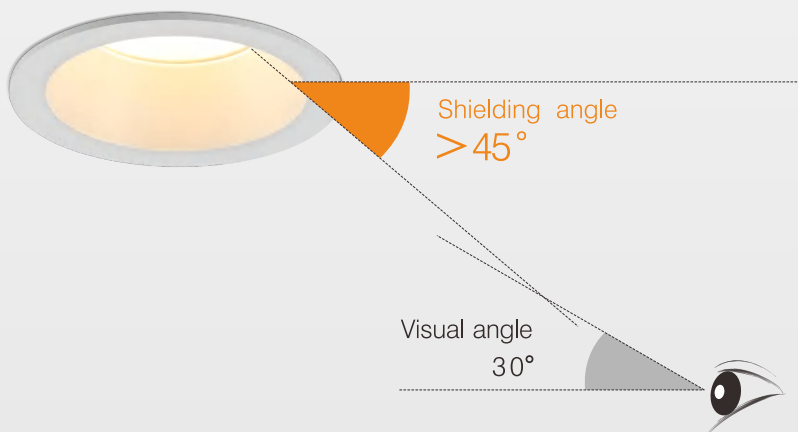

80005



8W



15W



25W



33W

ALTD80005-8W

POWER: 8W
CRI: 90
LUMEN:815Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø83.5*H49mm
HOLE SIZE:Ø75mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALTD80005-15W

POWER: 15W
CRI: 90
LUMEN:1503Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø105*H58mm
HOLE SIZE:Ø95mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALTD80005-25W

POWER: 25W
CRI: 90
LUMEN:2778Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø137*H65.5mm
HOLE SIZE:Ø125mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALTD80005-33W

POWER: 33W
CRI: 90
LUMEN:3661Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø158*H72.5mm
HOLE SIZE:Ø145mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

RECOMMEND OTHER VERSIONS



ON/OFF



TUNABLE BY SWITCH



DIM TRIAC



DIM 0-10V



DALI

ALIP80005-8W IP54

POWER: 8W
CRI: 90
LUMEN:815Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø83.5*H49mm
HOLE SIZE:Ø75mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALIP80005-15W IP54

POWER: 15W
CRI: 90
LUMEN:1503Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø105*H58mm
HOLE SIZE:Ø95mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALIP80005-25W IP54

POWER: 25W
CRI: 90
LUMEN:2778Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø137*H65.5mm
HOLE SIZE:Ø125mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

ALIP80005-33W IP54

POWER: 33W
CRI: 90
LUMEN:3661Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø158*H72.5mm
HOLE SIZE:Ø145mm
BEAM ANGLE: 85°
FINISHED COLOR: Black/White

RECOMMEND OTHER VERSIONS(Can be customized)



ON/OFF




DIM TRIAC



DIM 0-10V




DALI






80005-8W



ANGLE 85°

8W 85° 4000K

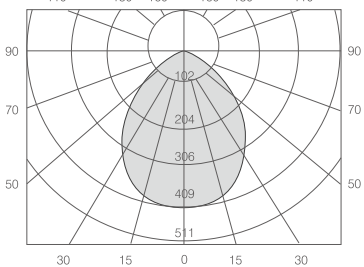

8W 85° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	408.89	1.81/1.82	2.6	115.55
2.0	102.22	3.61/3.64	10.4	28.89
3.0	45.43	5.42/5.46	23.4	12.84
4.0	25.56	7.22/7.28	41.6	7.22
5.0	16.36	9.03/9.10	64.9	4.62

Dv Beam Angle(B): H84.2 V84.6 Field angle(F): H129.1 V128.8

80005A



ALTD80005A-8W

POWER: 8W
CRI: 90
LUMEN: 655Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø83.5*H49mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALTD80005A-15W

POWER: 15W
CRI: 90
LUMEN: 1135Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H58mm
HOLE SIZE: Ø95mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALTD80005A-20W

POWER: 20W
CRI: 90
LUMEN: 1788Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø137*H65.5mm
HOLE SIZE: Ø125mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALTD80005A-30W

POWER: 30W
CRI: 90
LUMEN: 2419Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø158*H72.5mm
HOLE SIZE: Ø145mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

RECOMMEND OTHER VERSIONS



ON/OFF



TUNABLE BY SWITCH



DIM TRIAC



DIM 0-10V



DALI

ALIP80005A-8W IP54

POWER: 8W
CRI: 90
LUMEN: 655Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø83.5*H49mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALIP80005A-15W IP54

POWER: 15W
CRI: 90
LUMEN: 1135Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H58mm
HOLE SIZE: Ø95mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALIP80005A-20W IP54

POWER: 20W
CRI: 90
LUMEN: 1788Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø137*H65.5mm
HOLE SIZE: Ø125mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

ALIP80005A-30W IP54

POWER: 30W
CRI: 90
LUMEN: 2419Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø158*H72.5mm
HOLE SIZE: Ø145mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White

RECOMMEND OTHER VERSIONS(Can be customized)



ON/OFF




DIM TRIAC



DIM 0-10V




DALI

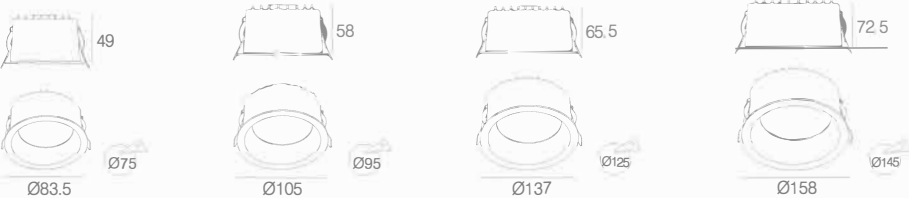




80005A-8W



ANGLE 80°

8W 80° 3000K

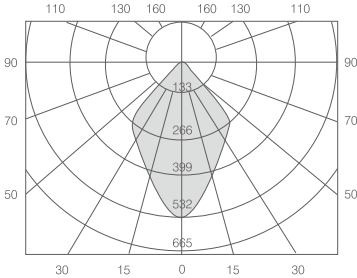

8W 80° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	530.81	1.56/1.59	1.9	165.79
2.0	132.70	3.11/3.18	7.8	41.45
3.0	58.98	4.67/4.77	17.5	18.42
4.0	33.18	6.22/6.36	31.2	10.36
5.0	21.23	7.78/7.95	48.7	6.63

Dv Beam Angle(B): H175.8 V177.0 Field angle(F): H97.7 V95.8

COLOR FINISHINGS:



Black



White

137



Shielding angle
> 45°

Visual angle
30°





8WY



12WY



15WY


ALTD0316-8WY

POWER: 8W
CRI: 90
LUMEN:657Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø82*H45mm
HOLE SIZE: Ø75mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White




ALTD0316-12WY

POWER: 12W
CRI: 90
LUMEN:955Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø105*H55mm
HOLE SIZE: Ø95mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



ALTD0316-15WY

LED POWER: 15W
CRI: 90
LUMEN:1312Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø125*H60mm
HOLE SIZE: Ø115mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF




ALTD0316-8WY




ANGLE 80°

8W 80° 3000K

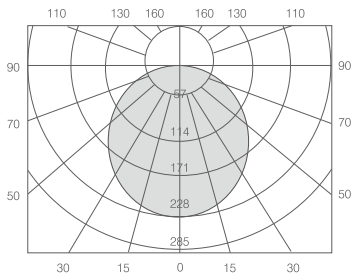

8W 80° 3000K



0286 SERIES



140

Downlight series

SMD & COB light source





9W



15W



21W



30W

ALTD0286A-9W

POWER: 9W
CRI: 90
LUMEN: 856Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H42mm
HOLE SIZE: Ø95mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALTD0286A-15W

POWER: 15W
CRI: 90
LUMEN: 1435Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø145*H49mm
HOLE SIZE: Ø130mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALTD0286A-21W

POWER: 21W
CRI: 90
LUMEN: 2235Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø187*H53mm
HOLE SIZE: Ø160mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALTD0286A-30W

POWER: 30W
CRI: 90
LUMEN: 3095Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø222*H58mm
HOLE SIZE: Ø205mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALIP0286A-9W IP54

POWER: 9W
CRI: 90
LUMEN: 856Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H42mm
HOLE SIZE: Ø95mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALIP0286A-15W IP54

POWER: 15W
CRI: 90
LUMEN: 1435Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø145*H49mm
HOLE SIZE: Ø130mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALIP0286A-21W IP54

POWER: 21W
CRI: 90
LUMEN: 2235Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø187*H53mm
HOLE SIZE: Ø160mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

ALIP0286A-30W IP54

POWER: 30W
CRI: 90
LUMEN: 3095Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø222*H58mm
HOLE SIZE: Ø205mm
BEAM ANGLE: 105°
FINISHED COLOR: White + Black/Black

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS:





Black



White + Black

PRODUCT SHOWCASE

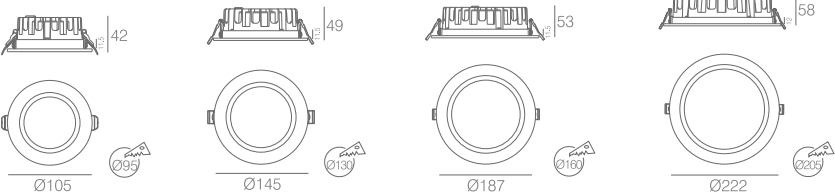




142

ALTD0286A-9W/ALIP0286A-9W



ANGLE 105°

9W 105° 3000K

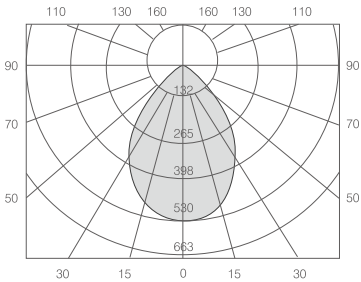


9W 105° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	530.11	1.52/1.54	1.8	168.83
2.0	132.53	3.03/3.07	7.3	42.21
3.0	58.90	4.55/4.61	16.5	18.76
4.0	33.13	6.07/6.14	29.3	10.55
5.0	21.20	7.58/7.68	45.8	6.75

Dv Beam Angle(B):H74.4 V75.1 Field angle(F):H104.5 V104.2

0286

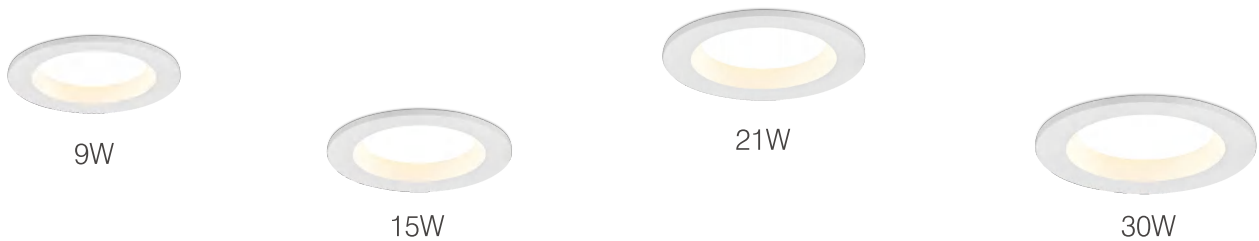

ALTD0286G-9W/15W/21W/30W/40W

POWER: 9W/15W/21W/30W/40W
CRI: 90
LUMEN: 857Lm/4000K, 1375Lm/4000K, 2115Lm/4000K, 2766Lm/4000K, 3282Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H42mm/Ø145*H49mm/Ø187*H53mm/Ø222*H58mm/Ø222*H58mm
HOLE SIZE: Ø95mm/Ø130mm/Ø160mm/Ø205mm/Ø205mm
BEAM ANGLE: 105°
FINISHED COLOR: White+Black

ALIP0286G-9W/15W/21W/30W/40W IP54

POWER: 9W/15W/21W/30W/40W
CRI: 90
LUMEN: 857Lm/4000K, 1375Lm/4000K, 2115Lm/4000K, 2766Lm/4000K, 3282Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H42mm/Ø145*H49mm/Ø187*H53mm/Ø222*H58mm/Ø222*H58mm
HOLE SIZE: Ø95mm/Ø130mm/Ø160mm/Ø205mm/Ø205mm
BEAM ANGLE: 105°
FINISHED COLOR: White+Black

RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC




DIM 0-10V



DALI

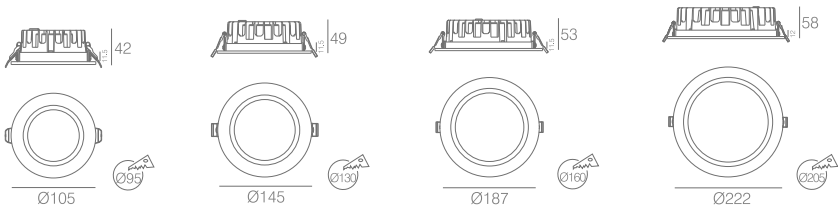

PRODUCT SHOWCASE






144

ALTD0286G-9W/ALIP0286G-9W



ANGLE 105°

9W 105° 3000K

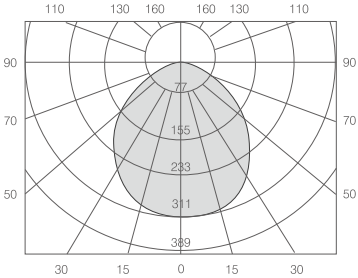

9W 105° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	311.02	2.53/2.43	4.7	68.17
1.6	121.49	3.90/3.88	11.9	26.63
2.0	77.76	4.87/4.85	18.6	17.04
2.5	51.82	5.97/5.94	27.9	11.36
3.0	34.56	7.30/7.28	41.9	7.57

Dv Beam Angle(B):H101.2 V101.0 Field angle(F):H147.8 V147.7



IP54

0260B SERIES

COLOR FINISHINGS:



Black



White



Black



White

5W



10W




15W



20W

ALIP0260B-5WY **IP54**
ALTD0260B-5WY

POWER: 5W
CRI: 90
LUMEN: 457Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø80*H40mm
HOLE SIZE: Ø65mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




RECOMMEND OTHER VERSIONS



ALIP0260B-10WY **IP54**
ALTD0260B-10WY

POWER: 10W
CRI: 90
LUMEN: 862Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H40mm
HOLE SIZE: Ø80mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




RECOMMEND OTHER VERSIONS



ALIP0260B-15WY **IP54**
ALTD0260B-15WY

LED POWER: 15W
CRI: 90
LUMEN: 1220Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø115*H40mm
HOLE SIZE: Ø100mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ALIP0260B-20WY **IP54**
ALTD0260B-20WY

LED POWER: 20W
CRI: 90
LUMEN: 1664Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø135*H40mm
HOLE SIZE: Ø120mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




ALTD0260B-5WY/ALIP0260B-5WY



ANGLE 110°

5W 110° 3000K




5W 110° 3000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	132.15	3.30/3.15	8.2	20.94
2.0	33.04	6.61/6.31	32.8	5.24
3.0	14.68	9.91/9.46	73.7	2.33
4.0	8.26	13.21/12.61	131.1	1.31
5.0	5.29	16.52/15.77	204.8	0.84


Dv Beam Angle(B): H117.6/V115.2 Field angle(F): H169.6/V165.0

ALTD0260B-10WY/ALIP0260B-10WY



ANGLE 110°

10W 110° 4000K




10W 110° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	248.01	3.29/3.19	8.3	38.10
2.0	62.00	6.59/6.37	33.0	9.78
3.0	27.56	9.88/9.56	74.3	4.34
4.0	15.50	13.17/12.75	132.2	2.44
5.0	9.92	16.46/15.94	206.5	1.56


Dv Beam Angle(B): H117.5/V115.8 Field angle(F): H172.2/V165.7

ALTD0260B-15WY/ALIP0260B-15WY



ANGLE 110°

15W 110° 4000K




15W 110° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	361.31	3.29/3.14	8.1	57.60
2.0	90.33	6.58/6.27	32.5	14.40
3.0	40.15	9.87/9.41	73.0	6.40
4.0	22.58	13.16/12.54	129.8	3.60
5.0	14.45	16.45/15.68	202.9	2.30


Dv Beam Angle(B): H117.4/V114.9 Field angle(F): H169.6/V165.4

ALTD0260B-20WY/ALIP0260B-20WY



ANGLE 110°

20W 110° 4000K



20W 110° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	502.88	3.14/3.16	7.8	82.17
2.0	125.72	6.28/6.33	31.2	20.54
3.0	55.88	9.43/9.49	70.3	9.13
4.0	31.43	12.57/12.65	124.9	5.14
5.0	20.12	15.71/15.81	195.2	3.29

Dv Beam Angle(B): H115.0/V115.4 Field angle(F): H167.1/V167.3

0260B



5W



10W



ALIP0260B-5WF IP54
ALTD0260B-5WF

POWER: 5W
CRI: 90
LUMEN: 457lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L80*W80*H40mm
HOLE SIZE: L65*W65mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White

ALIP0260B-10WF IP54
ALTD0260B-10WF

POWER: 10W
CRI: 90
LUMEN: 862lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L95*W95*H40mm
HOLE SIZE: L80*W80mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White


147



RECOMMEND OTHER VERSIONS


RECOMMEND OTHER VERSIONS

ALTD0260B-5WF/ALIP0260B-5WF



ANGLE 110°

5W 110° 3000K




5W 110° 3000K

Dist(m)	Enad(lr(k))	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	132.15	3.30/3.15	8.2	20.94
2.0	33.04	6.61/6.31	32.8	5.24
3.0	14.68	9.91/9.46	73.7	2.33
4.0	8.26	13.21/12.61	131.1	1.31
5.0	5.29	16.52/15.77	204.8	0.84


Dv Beam Angle(B): H117.6 V115.2 Field angle(F): H169.6 V165.0

ALTD0260B-10WF/ALIP0260B-10WF



ANGLE 110°

10W 110° 4000K



10W 110° 4000K

Dist(m)	Enad(lr(k))	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	248.01	3.29/3.19	8.3	39.10
2.0	62.00	6.59/6.37	33.0	9.78
3.0	27.56	9.88/9.56	74.3	4.34
4.0	15.50	13.17/12.75	132.2	2.44
5.0	9.92	16.46/15.94	206.5	1.56

Dv Beam Angle(B): H117.5 V115.8 Field angle(F): H172.2 V165.7





ALTH0661A-5WY



MINI SERIES




5WY



5WF


ALTH0629A-5WY

POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø50*H50mm
HOLE SIZE:Ø45mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: White



ALTH0629A-5WF

POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L50*W50*50mm
HOLE SIZE:L45*W45mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: White



150


RECOMMEND



ON/OFF



ALTH0629A-5WY/F




ANGLE 38°

OTHER VERSIONS



24°

5W 38° 3000K



5W 38° 3000K

Dist.(m)	Enadir(lx)	Dh(Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	608.81	0.78/0.76	0.5	247.52
2.0	152.20	1.55/1.53	1.9	61.88
3.0	67.65	2.33/2.29	4.2	27.50
4.0	38.05	3.10/3.06	7.5	15.47
5.0	24.35	3.88/3.85	11.7	9.90

Dv Beam Angle(B) H42.4 V41.8 Field angle(F) H69.7 V69.6

ALTH0638A



5WY

Adjustable 30°




5WF

Adjustable 30°


ALTH0638A-5WY

POWER: 5W
CRI: 90
LUMEN: 384lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø50*H50mm
HOLE SIZE: Ø45mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: White



ALTH0638A-5WF

POWER: 5W
CRI: 90
LUMEN: 384lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L50*W50*50mm
HOLE SIZE: L45*W45mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: White






RECOMMEND



ON/OFF



ALTH0638A-5WY/F






5WY



5WF


ALTH0660A-5WY

POWER: 5W
CRI: 90
LUMEN: 384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45*H40mm
HOLE SIZE: Ø40mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: White



ALTH0660A-5WF

POWER: 5W
CRI: 90
LUMEN: 384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L45*W45*H40mm
HOLE SIZE: L40*W40mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: White





RECOMMEND




ON/OFF



ALTH0660A-5WY/F




5W 40° 3000K



5W 40° 3000K


Dist(m)	Enadir(lx)	Dh(Dx_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	608.81	0.78/0.76	0.5	247.52
2.0	152.20	1.55/1.53	1.9	61.88
3.0	67.65	2.33/2.29	4.2	27.50
4.0	38.05	3.10/3.06	7.5	15.47
5.0	24.35	3.88/3.85	11.7	9.90

ALTH0661A




ALTH0661A-5WY

POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H45mm
HOLE SIZE: Ø50mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: White



ALTH0661A-5WF



POWER: 5W
CRI: 90
LUMEN:384Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L55*W55*H45mm
HOLE SIZE: L50*W50mm
BEAM ANGLE: 20°/40°/60°
FINISHED COLOR: White



RECOMMEND



ALTH0661A-5WY/F

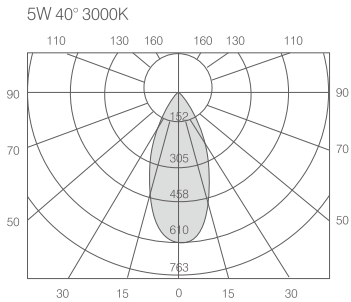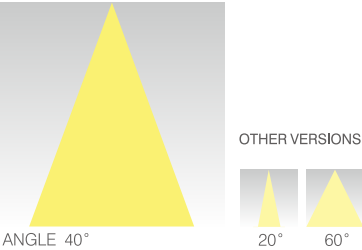

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	608.81	0.78/0.76	0.5	247.52
2.0	152.20	1.55/1.53	1.9	61.88
3.0	67.65	2.33/2.29	4.2	27.50
4.0	38.05	3.10/3.06	7.5	15.47
5.0	24.35	3.88/3.85	11.7	9.90

Dv Beam Angle(B): H42.4 V41.8 Field angle(F): H69.7 V69.6




Rea Light




155



0616B SERIES

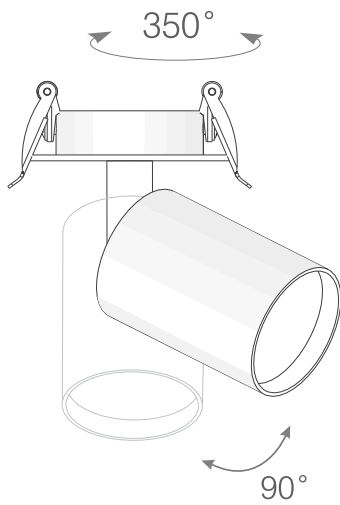

ALXS0616B

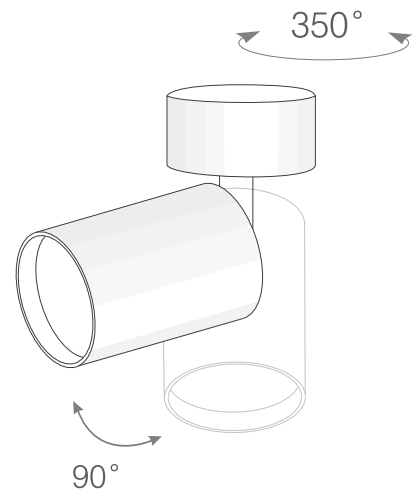

ALTH0616B



ALTH0616B



8W




12W



ALGD0616B



ALTH0616B-8W

POWER: 8W
CRI: 90
LUMEN: 736lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H78mm
HOLE SIZE: Ø45-50mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALTH0616B-12W

POWER: 12W
CRI: 90
LUMEN: 1056lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H105mm
HOLE SIZE: Ø45-50mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White

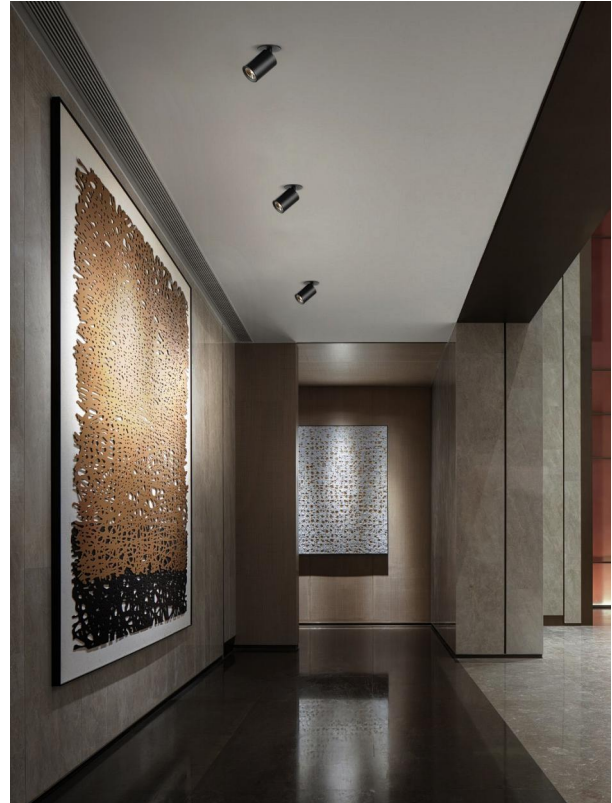

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V




DALI

ALTH0616B-8W




ANGLE 24°

OTHER VERSIONS



15° 38°

8W 24° 4000K




8W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2904.43	0.46/0.46	0.2	1270.40
2.0	726.11	0.92/1.92	0.7	317.60
3.0	322.71	1.38/1.39	1.5	141.16
4.0	181.53	1.84/1.85	2.7	79.40
5.0	116.18	2.30/2.31	4.2	50.82


Dv Beam Angle(B): H25.9 V26.0 Field angle(F): H46.6 V47.4

ALTH0616B-12W




ANGLE 24°

OTHER VERSIONS



15° 38°

12W 24° 4000K



12W 24° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2816.26	0.56/0.57	0.3	1195.50
2.0	704.06	1.13/1.14	1.0	298.88
3.0	312.92	1.69/1.71	2.3	132.83
4.0	176.02	2.26/2.28	4.1	74.72
5.0	112.65	2.82/2.86	6.3	47.82

Dv Beam Angle(B): H31.5 V31.9 Field angle(F): H58.2 V58.2



8W




12W



ALGD0616B

ALXS0616B-8W

POWER: 8W
CRI: 90
LUMEN: 727Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H78mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




ON/OFF



DIM TRIAC

ALXS0616B-12W

POWER: 12W
CRI: 90
LUMEN: 1085Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H105mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




RECOMMEND



ON/OFF



ALXS0616B-8W



ANGLE 24°


OTHER VERSIONS



15°

38°

8W 24° 4000K




8W 24° 4000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lk)
1.0	2904.43	0.46/0.46	0.2	1270.40
2.0	726.11	0.92/1.92	0.7	317.60
3.0	322.71	1.38/1.39	1.5	141.16
4.0	181.53	1.84/1.85	2.7	79.40
5.0	116.18	2.30/2.31	4.2	50.82

Dv Beam Angle(B): H25.9 V26.0 Field angle(F): H46.6 V47.4

ALXS0616B-12W



ANGLE 24°


OTHER VERSIONS



15°

38°

12W 24° 4000K



12W 24° 4000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lk)
1.0	2816.26	0.56/0.57	0.3	1195.50
2.0	704.06	1.13/1.14	1.0	298.88
3.0	312.92	1.69/1.71	2.3	132.83
4.0	176.02	2.26/2.28	4.1	74.72
5.0	112.65	2.82/2.86	6.3	47.82

Dv Beam Angle(B): H31.5 V31.9 Field angle(F): H58.2 V58.2

0616-GU10

ReaLight





159

0616-GU10 SERIES



Available as GU10 lighting cup

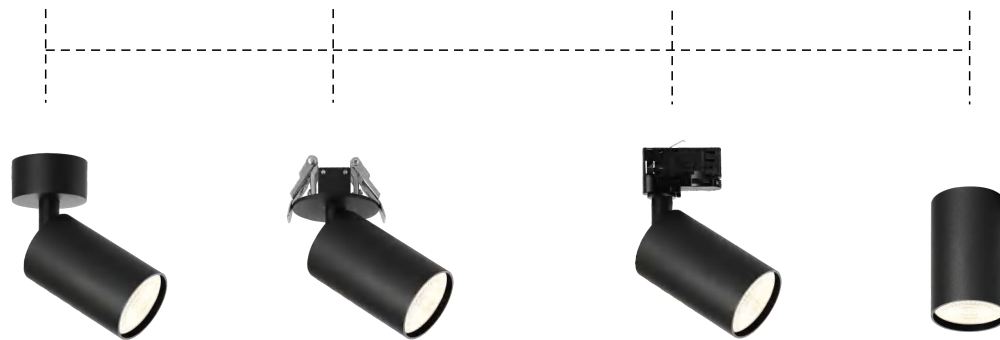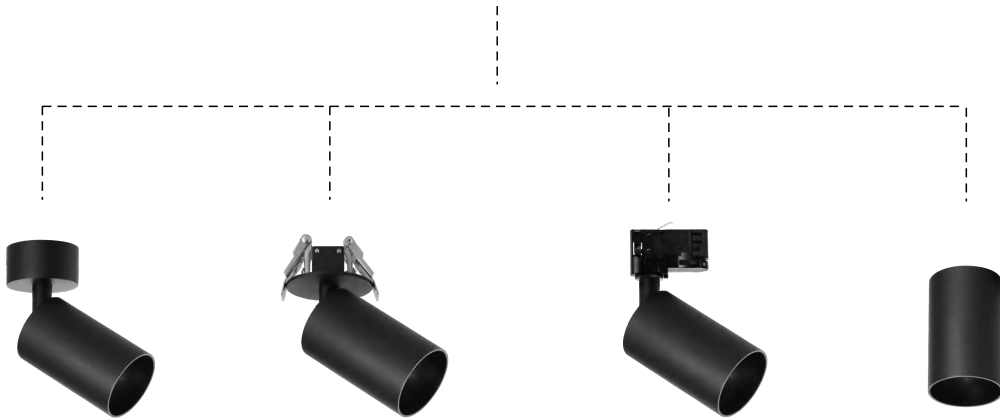


ALXS0616A-GU10

ALTH0616-GU10

ALGD0616-GU10

ALXS0616B-GU10

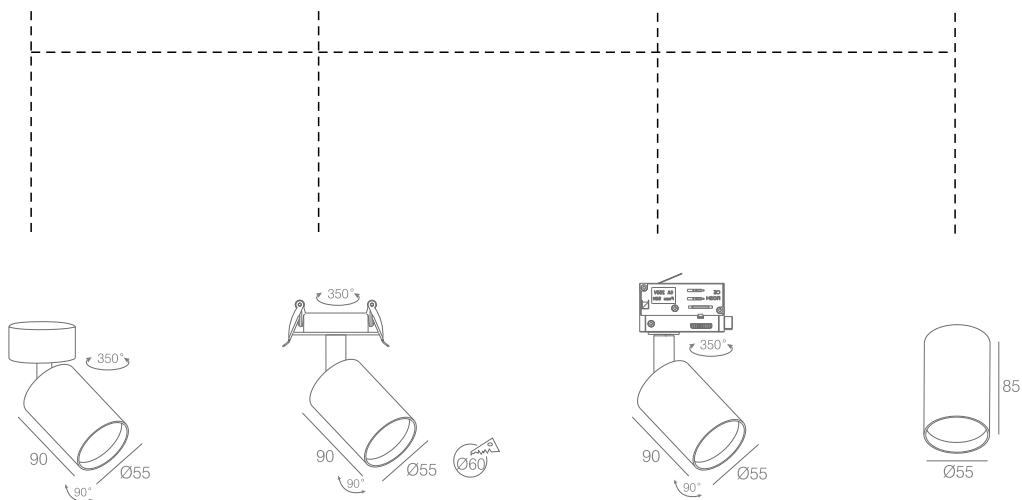

Rea Light



161


0687 SERIES



ALTH0687A

162

ALLXS0687A




ALTH0687A



ALTH0687A-7W


POWER: 7W
CRI: 90
LUMEN: 532Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø35*H118mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



163

ALTH0687A-12W

POWER: 12W
CRI: 90
LUMEN: 1076Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



RECOMMEND




ON/OFF


COLOR FINISHINGS




ALTH0687A-7W



OTHER VERSIONS



7W 38° 3000K



7W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	882.61	0.69/0.70	0.4	370.11
2.0	220.65	1.39/1.39	1.5	92.53
2.5	141.22	1.74/1.74	2.4	59.22
3.0	98.07	2.08/2.09	3.5	41.12
3.5	72.05	2.43/2.44	4.7	30.21

Dv Beam Angle(B): H38.3 V37.4 Field angle(F): H71.4 V71.9



7W



12W



ALXH0687A




ALXS0687A



ALXS0689A


ALXS0687A-7W

POWER: 7W
CRI: 90
LUMEN:532Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø35*H118mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



ALXS0687A-12W

POWER: 12W
CRI: 90
LUMEN:1076Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø55*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



RECOMMEND



ON/OFF

COLOR FINISHINGS:



Black




Gold+Black



White+Black




ALXS0687A-7W



ANGLE 38°


OTHER VERSIONS



15°

24°

7W 38° 3000K



7W 38° 3000K

Dist(m)	Enadir(lx)	Dh(Di_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	882.61	0.69/0.70	0.4	370.11
2.0	220.65	1.39/1.39	1.5	92.53
2.5	141.22	1.74/1.74	2.4	59.22
3.0	98.07	2.08/2.09	3.5	41.12
3.5	72.05	2.43/2.44	4.7	30.21

Dv Beam Angle(B):H38.3 V37.4 Field angle(F):H71.4 V71.9

ALXS0689A




7W



12W

ALXS0689A-7W


POWER: 7W
CRI: 90
LUMEN: 625Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45*H118mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



165

ALXS0689A-12W

POWER: 12W
CRI: 90
LUMEN: 1076Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H128mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



RECOMMEND



ON/OFF


COLOR FINISHINGS



Black

Gold+Black

White+Black

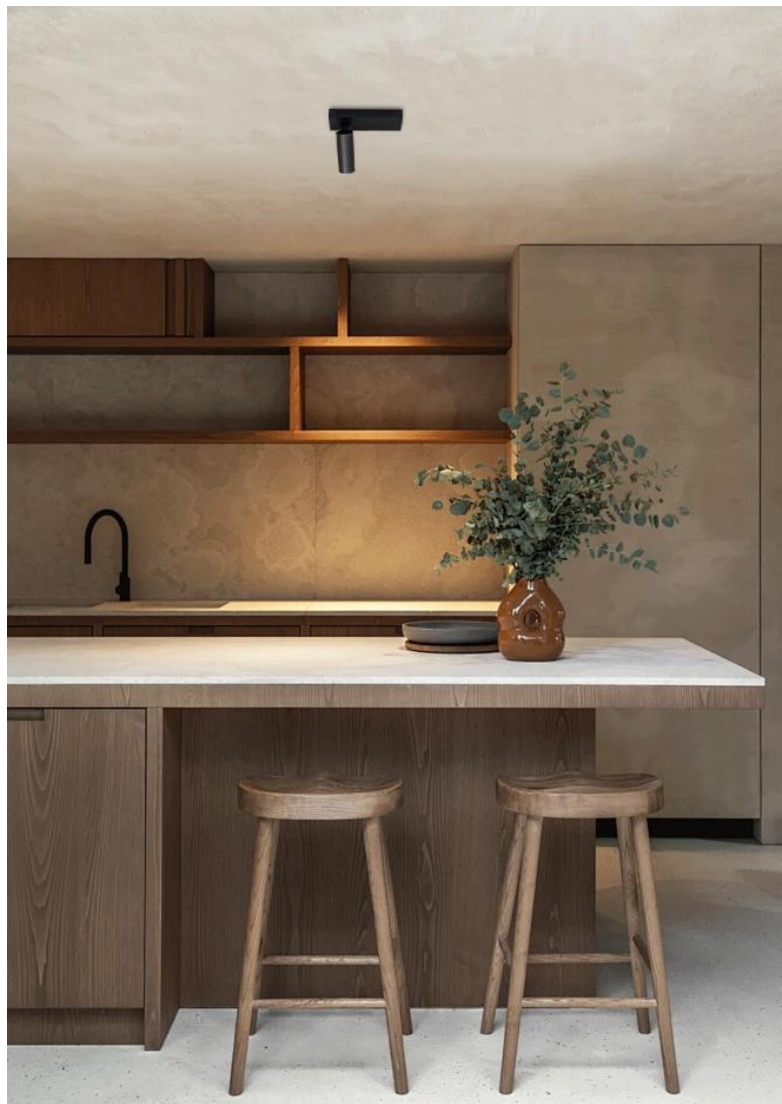



2*7W



2*12W



ALXS0687A




ALXS0687A



ALXS0689A


ALXS0689A-2*7W

POWER: 2*7W
CRI: 90
LUMEN: 1123Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45*H118mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



ALXS0689A-2*12W

POWER: 2*12W
CRI: 90
LUMEN: 2*1076Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H128mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



RECOMMEND



ON/OFF


COLOR FINISHINGS



Black

Gold+Black

White+Black

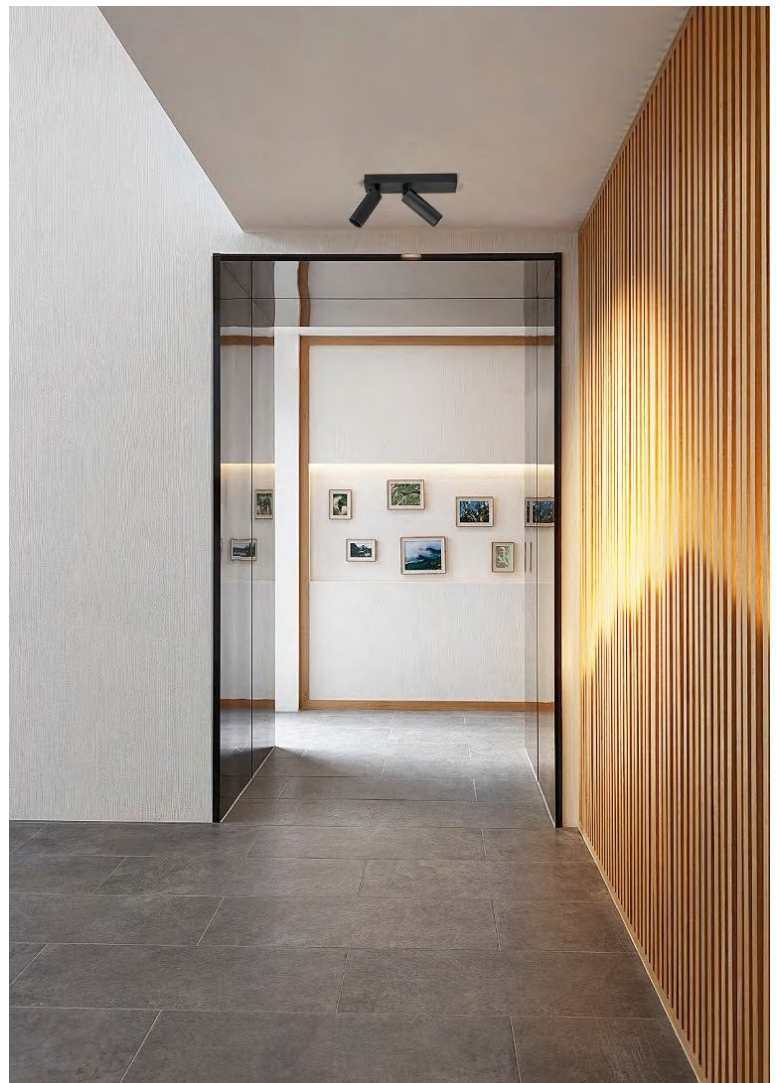

ALGD0812



10W



15W



20W




25W



30W


ALGD0812-10W

POWER: 10W
CRI: 90
LUMEN: 880Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*H56mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



ALGD0812-15W

POWER: 15W
CRI: 90
LUMEN: 1380Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø120*H56mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI


ALGD0812-20W

POWER: 20W
CRI: 90
LUMEN: 1805Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø140*H56mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold




ALGD0812-25W

POWER: 25W
CRI: 90
LUMEN: 2170Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø175*H67mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



ALGD0812-30W

POWER: 30W
CRI: 90
LUMEN: 2510Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø210*H70mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS:



Black



Silver




White




Gold


TRACK OPTIONS



2L




3L




4L



ALGD0812-10W



ANGLE 110°



10W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	324.47	2.80/2.77	6.1	61.49
2.0	81.12	5.60/5.54	24.4	15.37
2.5	51.91	7.00/6.93	74.6	9.84
3.5	26.49	9.79/9.70	123.3	5.02
4.5	16.02	12.59/12.47	219.2	3.04

Dv Beam Angle(B): H108, 9 V108, 4 Field angle(F): H160.4 V158.7

ALGD80106



12W




20W



30W


TRACK OPTIONS



2L

3L


4L



ALXS80106


ALGD80106-12W

POWER: 12W
CRI: 90
LUMEN: 1184Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H45mm
BEAM ANGLE: 90°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold




ALGD80106-20W

LED POWER: 20W
CRI: 90
LUMEN: 2174Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø123*H45mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



ALGD80106-30W

LED POWER: 30W
CRI: 90
LUMEN: 3329Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø153*H45mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold /White+Black/White+Gold



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DALI

COLOR FINISHINGS:




Black+Black Black+Gold White+Black White+Gold

ALGD80106-12W



ANGLE 90°

12W 90° 4000K



12W 90° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	720.11	1.70/1.67	2.2	219.67
1.6	281.29	2.72/2.67	5.7	85.81
2.0	180.03	3.40/3.34	8.9	54.92
2.5	119.97	4.16/4.09	13.4	36.60
3.0	80.01	5.10/5.01	20.1	24.41

Dv Beam Angle(B): H80.7 V79.7 Field angle(F): H90.4 V88.6




12W



18W




24W

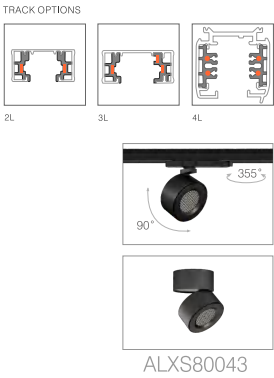


ALGD80043-12W-4L

POWER: 12W
CRI: 90
LUMEN: 1206Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H47mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALGD80043-18W-4L

LED POWER: 18W
CRI: 90
LUMEN: 1794Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H52mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALGD80043-24W-4L

LED POWER: 24W
CRI: 90
LUMEN: 2129Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø125*H57mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND




ON/OFF

COLOR FINISHINGS:



Black White White+Black

ALGD80043-12W-4L




OTHER VERSIONS



15° 38°

12W 24° 4000K



12W 24° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	7050.16	0.40/0.39	0.1	3119.22
2.0	1762.65	0.80/0.79	0.52	779.81
3.0	783.35	1.20/1.18	1.1	346.58
4.0	440.64	1.60/1.57	2.0	194.95
5.0	282.01	2.00/1.97	3.1	124.77


Dv Beam Angle(B) H22.6 V22.2 Field angle(F): H34.9 V34.8

ALGD0671A


ReaLight



171

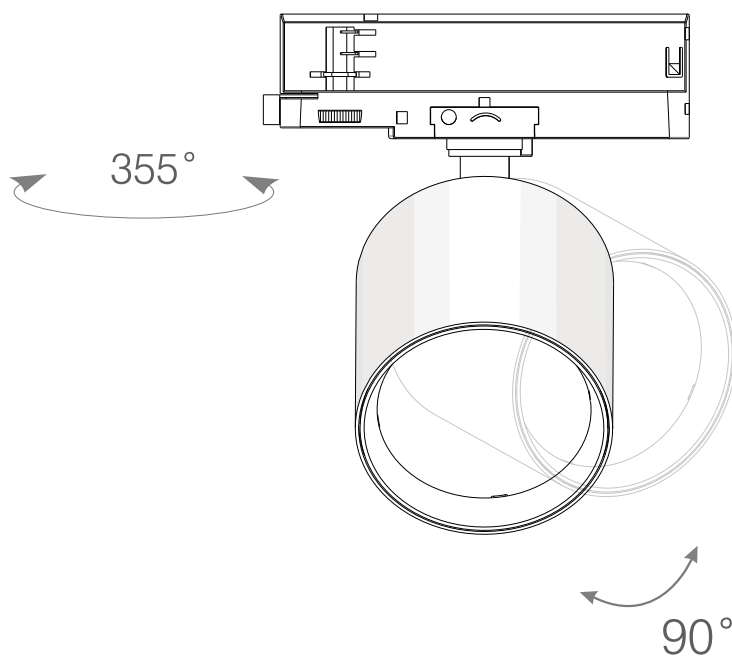

TRACK OPTIONS

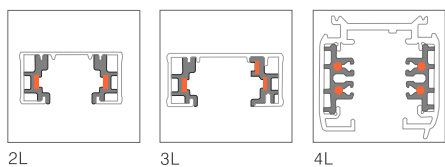



ALGD0671A SERIES

ALGD0671A



12W






20W



30W




TRACK OPTIONS:




ALGD0671A-12W

POWER: 12W
CRI: 90
LUMEN: 1117Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H80mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White




ALGD0671A-20W

POWER: 20W
CRI: 90
LUMEN: 1879Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø80*H90mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White



ALGD0671A-30W

POWER: 30W
CRI: 90
LUMEN: 2205Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H100mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM 0-10V




DALI




ALGD0671A-12W



OTHER VERSIONS



12W 24° 3000K




12W 24° 3000K

Dist(m)	Enadir(lk)	Dr/Dv(m)	S_B(sq.m)	Eav_B(lk)
1.0	2998.80	0.45/1.67	0.2	1306.55
2.0	749.70	0.89/0.88	0.6	326.64
2.5	479.81	1.12/1.10	1.0	209.05
3.5	244.80	1.56/1.54	1.9	106.66
4.5	148.09	2.01/1.99	3.1	64.52




35W



ALGD0765E-35W

POWER: 35W
CRI: 90
LUMEN: 3106Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø100*H109mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V




DALI


TRACK OPTIONS



2L




3L



4L




ALGD0765E-35W




ANGLE 38°

OTHER VERSIONS



35W 38° 3000K

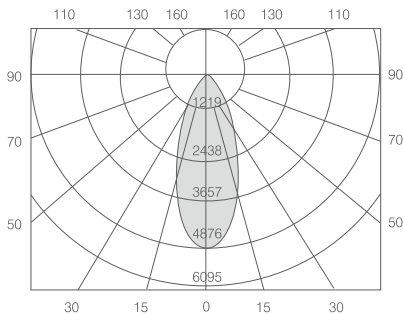

35W 38° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4875.05	0.71/0.71	0.4	2025.78
2.0	1218.76	1.41/1.41	1.6	506.44
3.0	541.67	2.12/2.12	3.5	225.09
4.0	304.69	2.82/2.82	6.3	126.61
5.0	195.00	3.53/3.53	9.8	81.03

ALGD0766E




10W




20W




30W




TRACK OPTIONS



2L




3L



4L


ALGD0766E-10W

POWER: 10W
CRI: 90
LUMEN: 1000lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø60*H100mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALGD0766E-20W


POWER: 20W
CRI: 90
LUMEN: 1922lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø70*H120mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



175

ALGD0766E-30W

POWER: 30W
CRI: 90
LUMEN: 2760lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø80*H130mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




RECOMMEND



ON/OFF




ALGD0766E-10W



ANGLE 24°


OTHER VERSIONS



15°


38°

ALGD0766E-30W



ANGLE 24°


OTHER VERSIONS



15°

38°

10W 24° 3000K




10W 24° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3742.44	0.37/0.37	0.1	1677.72
2.0	935.61	0.73/0.74	0.4	419.43
2.5	598.79	0.91/0.92	0.7	268.43
3.5	305.51	1.28/1.29	1.3	136.96
4.5	184.81	1.64/1.66	2.2	82.85

Dv Beam Angle(B): H20.7 V20.9 Field angle(F): H40.5 V46.5

30W 24° 3000K



30W 24° 3000K

Dist(m)	Enadir(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4518.83	0.70/0.70	0.4	1876.66
2.0	1129.71	1.40/1.40	1.6	568.41
2.5	723.01	1.75/1.75	2.4	299.78
3.5	368.88	2.45/2.45	4.8	152.95
4.5	223.15	3.16/3.15	7.9	92.95

Dv Beam Angle(B): H38.6 V38.6 Field angle(F): H70.0 V70.4



7W



12W



ALTH0687A




ALXS0687A




ALXS0689A


TRACK OPTIONS



2L




3L



4L


ALGD0687A-7W

POWER: 7W
CRI: 90
LUMEN:532Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø35*H118mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



ALGD0687A-12W

POWER: 12W
CRI: 90
LUMEN:1076Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø55*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/Gold+Black
/White+Black



RECOMMEND



ON/OFF

COLOR FINISHINGS:



Black




White+Black



Gold+Black



ALGD0687A-7W



ANGLE 38°

OTHER VERSIONS




15°



24°

7W 38° 3000K



7W 38° 3000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	882.61	0.69/0.70	0.4	370.11
2.0	220.65	1.39/1.39	1.5	92.53
2.5	141.22	1.74/1.74	2.4	59.22
3.0	98.07	2.08/2.09	3.5	41.12
3.5	72.05	2.43/2.44	4.7	30.21

Dv Beam Angle(B) H38.3 V37.4 Field angle(F): H71.4 V71.9

ALGD0833C



9W



15W




24W




ALXS0833C

TRACK OPTIONS:




ALGD0833C-9W

POWER: 9W
CRI: 90
LUMEN: 724Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H148mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




ALGD0833C-15W

POWER: 15W
CRI: 90
LUMEN: 1393Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
OUTPUT: DC28-42V 350mA
DIMENSION: Ø95*H170mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



ALGD0833C-24W

POWER: 24W
CRI: 90
LUMEN: 2429Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
OUTPUT: DC28-42V 600mA
DIMENSION: Ø105*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND




ON/OFF

OTHER VERSIONS




DIM TRIAC

ALGD0833C-9W




ANGLE 38°

OTHER VERSIONS



15° 24°

9W 38° 3000K



9W 38° 3000K

Dist(m)	Enadir(k)	Dh(Dv_B(m))	S_B(sq,m)	Eav_B(k)
1.0	1651.06	0.69/0.59	0.3	699.80
2.0	412.77	1.19/1.17	1.1	174.95
3.0	183.45	1.78/1.76	2.5	77.76
4.0	103.19	2.37/2.34	4.4	43.74
5.0	66.04	2.97/2.93	6.9	27.99

Dv Beam Angle(B): H33.1 V32.7 Field angle(F): H60.3 V60.0




9W



15W




24W




ALXS0833D

TRACK OPTIONS:




ALGD0833D-9W

POWER: 9W
CRI: 90
LUMEN: 718Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H148mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




ALGD0833D-15W

POWER: 15W
CRI: 90
LUMEN: 1198Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H170mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



ALGD0833D-24W

POWER: 24W
CRI: 90
LUMEN: 2284Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H175mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF


OTHER VERSIONS



DIM TRIAC




ALGD0833D-9W



ANGLE 110°

9W 110° 3000K



9W 110° 3000K

Dist(m)	EnaDir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	224.06	2.76/2.83	6.1	42.24
2.0	56.02	5.52/5.66	24.6	10.56
3.0	24.90	8.28/8.50	55.3	4.69
4.0	14.00	11.04/11.33	98.3	2.64
5.0	8.96	13.80/14.16	153.6	1.69

Dv Beam Angle(B): H108.1 V109.5 Field angle(F): H161.3 V159.8

ALGD80219



10W



15W



20W




30W



40W


ALGD80219-10W

POWER: 10W
CRI: 90
LUMEN: 699Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45.5*H105mm
BEAM ANGLE: 20°-60°
FINISHED COLOR: Black/White




ALGD80219-15W

POWER: 15W
CRI: 90
LUMEN: 1049Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H125mm
BEAM ANGLE: 20°-60°
FINISHED COLOR: Black/White




ALGD80219-20W

POWER: 20W
CRI: 90
LUMEN: 2004Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø65*H140mm
BEAM ANGLE: 20°-60°
FINISHED COLOR: Black/White




ALGD80219-30W

LED POWER: 30W
CRI: 90
LUMEN: 3190Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H155mm
BEAM ANGLE: 20°-60°
FINISHED COLOR: Black/White



ALGD80219-40W

LED POWER: 40W
CRI: 90
LUMEN: 3930Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H175mm
BEAM ANGLE: 20°-60°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM 0-10V



DALI

COLOR FINISHINGS:




Black




White


TRACK OPTIONS




2L



3L





4L

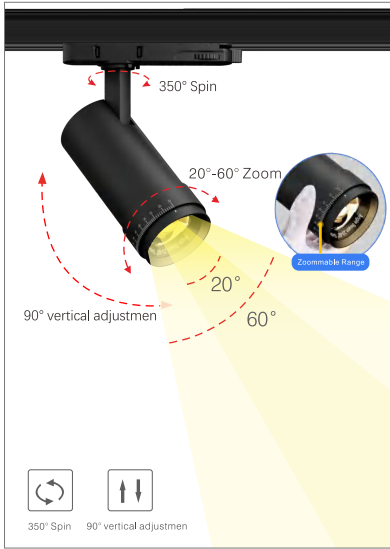



ALGD80219-15W



15W 60° 3000K

Dist(m)	Enadir(k)	Dh(Dx_B(m))	S_B(sq,m)	Eav_B(k)
1.0	5837.80	0.35/0.35	0.1	2630.36
2.0	1459.45	0.70/0.71	0.4	657.59
3.0	648.64	1.05/1.06	0.9	292.26
4.0	364.86	1.40/1.42	1.6	164.40
5.0	233.51	1.75/1.77	2.4	105.21

Dv Beam Angle(B):H19.8 V20.1 Field angle(F):H36.9 V37.3

ALGD9101A



10W



15W



20W




30W



40W


ALGD9101A-10W

POWER: 10W
CRI: 90
LUMEN: 1074Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø45.5*H100mm
BEAM ANGLE: 15° /24° /38° /60°
FINISHED COLOR: Black/White/White+Black




ALGD9101A-15W

POWER: 15W
CRI: 90
LUMEN: 1611Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H115mm
BEAM ANGLE: 15° /24° /38° /60°
FINISHED COLOR: Black/White/White+Black




ALGD9101A-20W

POWER: 20W
CRI: 90
LUMEN: 2249Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø65*H130mm
BEAM ANGLE: 15° /24° /38° /60°
FINISHED COLOR: Black/White/White+Black




ALGD9101A-30W

LED POWER: 30W
CRI: 90
LUMEN: 3301Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H145mm
BEAM ANGLE: 15° /24° /38° /60°
FINISHED COLOR: Black/White/White+Black



ALGD9101A-40W

LED POWER: 40W
CRI: 90
LUMEN: 4287Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85*H160mm
BEAM ANGLE: 15° /24° /38° /60°
FINISHED COLOR: Black/White/White+Black



RECOMMEND OTHER VERSIONS



ON/OFF



DIM 0-10V



DALI

COLOR FINISHINGS:



Black




White+Black




White


TRACK OPTIONS



2L



3L




4L







ALGD9101A-15W

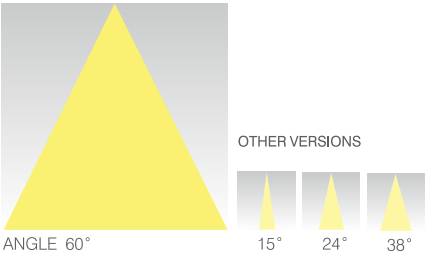

15W 60° 3000K



15W 60° 3000K



ALGD0616B

ReaLight



8W



12W



183

ALGD0616B SERIES




8W




12W

TRACK OPTIONS



ALGD0616B-8W

POWER: 8W
CRI: 90
LUMEN: 754Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H78mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF


OTHER VERSIONS



DIM TRIAC

ALGD0616B-12W


POWER: 12W
CRI: 90
LUMEN: 1085Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H105mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




RECOMMEND




ON/OFF

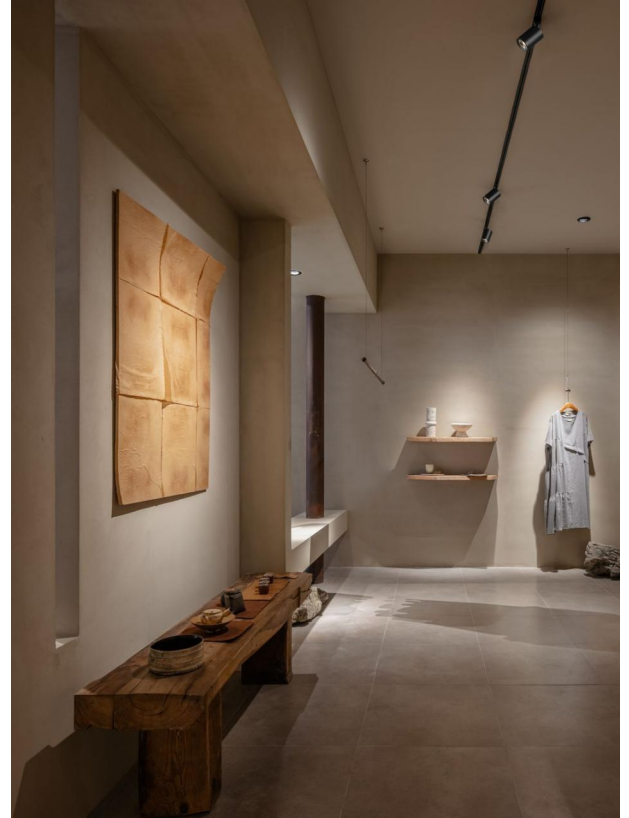


ALGD0616B-8W



OTHER VERSIONS



8W 4000K




8W 4000K


Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S _B (sq.m)	Eav_B(lk)
1.0	2904.43	0.46/0.46	0.2	1270.40
2.0	726.11	0.92/0.92	0.7	317.60
3.0	322.71	1.38/1.39	1.5	141.16
4.0	181.53	1.84/1.85	2.7	79.40
5.0	116.18	2.30/2.31	4.2	50.82

Dv Beam Angle(B):H25.9 V26.0 Field angle(F):H46.06 V47.4


ALGD0616B-12W



OTHER VERSIONS



12W 4000K



12W 4000K

Dist(m)	Enadir(lk)	Dh/Dv_B(m)	S _B (sq.m)	Eav_B(lk)
1.0	2816.26	0.56/0.57	0.3	1195.50
2.0	704.06	1.13/1.14	1.0	298.88
3.0	312.92	1.69/1.71	2.3	132.83
4.0	176.02	2.26/2.28	4.1	74.72
5.0	112.65	2.82/2.86	6.3	47.82

Dv Beam Angle(B):H31.5 V31.9 Field angle(F):H58.2 V58.2

ALGD80224



15W




25W




35W

TRACK OPTIONS




ALGD80224-15W

POWER: 15W
CRI: 90
LUMEN: 1505Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L127*W46*H115mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White




ALGD80224-25W

POWER: 25W
CRI: 90
LUMEN: 2264Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L207*W46*H115mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



ALGD80224-35W

POWER: 35W
CRI: 90
LUMEN: 3278Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L287*W46*H115mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS

Lamp body: Black/White

Anti-glare cup



Black + Black



White + White



Black




White




Gold

ALGD80224-15W




ANGLE 38°

OTHER VERSIONS



15W 38° 3000K




15W 38° 3000K

Dist(m)	Enad(lr/ft)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3424.78	0.73/0.73	0.4	1410.95
2.0	856.19	1.45/1.45	1.7	352.74
3.0	380.53	2.18/2.18	3.8	156.77
4.0	214.05	2.91/2.90	6.7	88.18
5.0	136.99	3.64/3.63	10.5	56.44

Dv Beam Angle(B): H40.0 V39.9 Field angle(F): H56.7 V56.7



15W

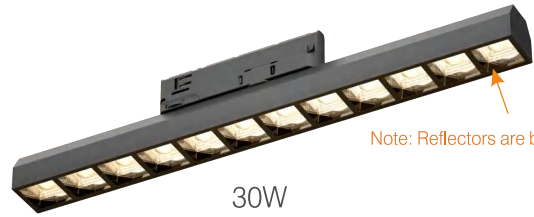


30W

Note: Reflectors are black only


ALGD80118-15W

POWER: 15W
CRI: 90
LUMEN: 1562Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L244*W44*H85mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black



ALGD80118-30W

POWER: 30W
CRI: 90
LUMEN: 3205Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L484*W44*H85mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black



RECOMMEND



ON/OFF

OTHER VERSIONS




DIM TRIAC



DALI



ALGD80118-15W




ANGLE 65°

OTHER VERSIONS



80°

15W 65° 3000K



15W 65° 3000K

Dist(m)	Enadir(lx)	Dh(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	1423.37	1.37/1.34	1.4	483.69
2.0	355.84	2.74/2.68	5.8	120.92
3.0	158.15	4.10/4.02	13.0	53.74
4.0	88.96	5.47/5.37	23.4	30.23
5.0	56.93	6.84/6.71	36.0	19.35

Dv Beam Angle(θ): H68.7 V67.7 Field angle(θ): H84.1 V82.9

ALGD80119



15W




30W

Note: Reflectors are black only



ALGD80119-15W

POWER: 15W
CRI: 90
LUMEN: 1562Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L244*W44*H114mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black



ALGD80119-30W

POWER: 30W
CRI: 90
LUMEN: 3205Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L484*W44*H114mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black

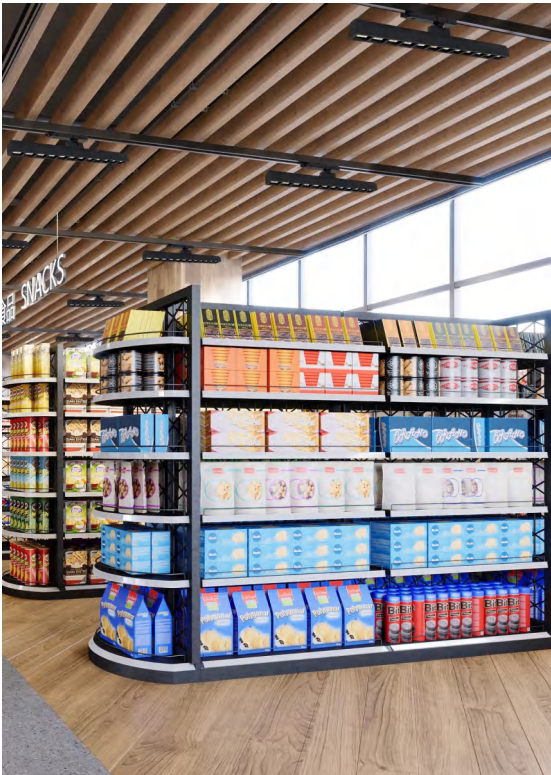

RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC



DALI

ALGD80119-15W




ANGLE 65°

OTHER VERSIONS



80°

ALGD80119-30W




ANGLE 65°

OTHER VERSIONS



80°


15W 65° 3000K



15W 65° 3000K



Dist(m)	Enadir(lx)	Dh/Dv_θ(m)	S_B(sq.m)	Eav_B(lx)
1.0	1423.37	1.37/1.34	1.4	483.69
2.0	355.84	2.74/2.68	5.8	120.92
3.0	158.15	4.10/4.02	13.0	53.74
4.0	88.96	5.47/5.37	23.4	30.23
5.0	56.93	6.84/6.71	36.0	19.35

30W 65° 3000K




30W 65° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_θ(m)	S_B(sq.m)	Eav_B(lx)
1.0	2677.43	1.41/1.38	1.5	897.95
2.0	669.36	2.82/2.75	6.1	224.49
3.0	297.49	4.22/4.13	13.7	99.77
4.0	167.34	5.63/5.50	24.4	56.12
5.0	107.10	7.04/6.88	38.1	35.92

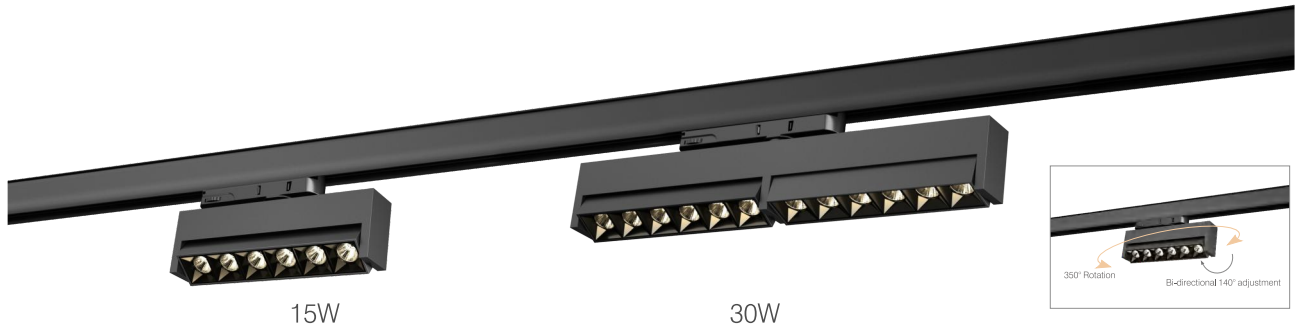



ALGD80211-15W

POWER: 15W
CRI: 90
LUMEN: 1595Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L202*W34*H107mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White



ALGD80211-30W

POWER: 30W
CRI: 90
LUMEN: 3136Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L397*W34*H107mm
BEAM ANGLE: 24°/38°/45°
FINISHED COLOR: Black/White

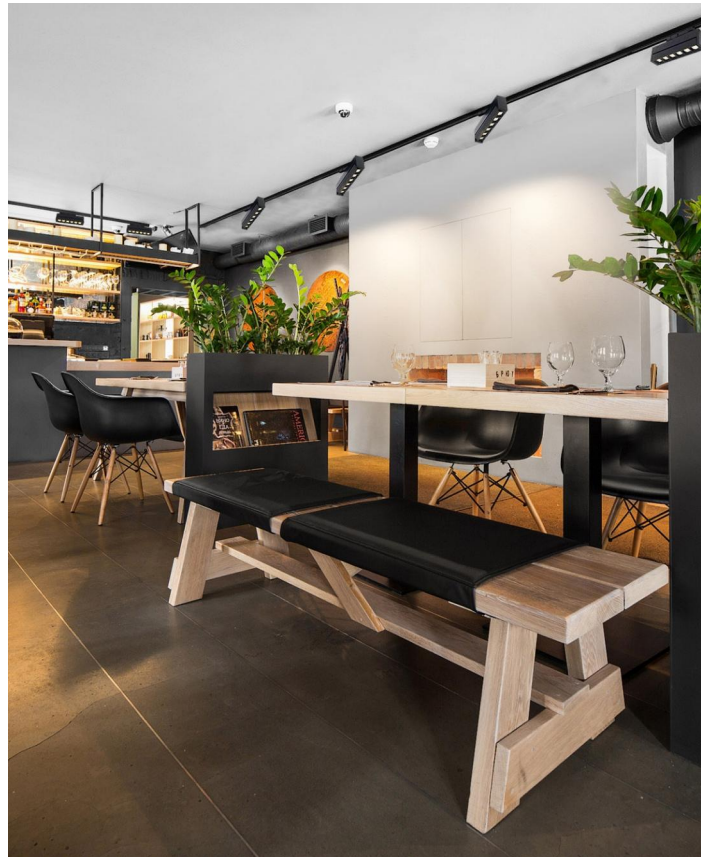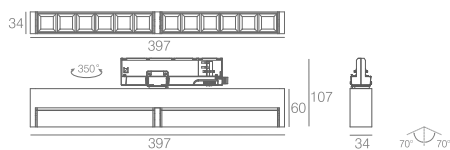

RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DALI

Reflectors can be replaced with the following colors:



Black



White



Silver




Rose Gold



Champagne Gold

ALGD80211-15W



ANGLE 38°


OTHER VERSIONS



24°

45°

15W 38° 3000K



15W 38° 3000K


Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3504.85	0.72/0.72	0.4	1440.53
2.0	876.21	1.44/1.44	1.6	360.13
3.0	389.46	2.15/2.15	3.6	160.06
4.0	219.05	2.87/2.87	6.5	90.03
5.0	140.19	3.59/3.59	10.1	57.62

Dv Beam Angle(B): H39.5 V39.5 Field angle(F): H61.3 V61.3

2ALGDX0001E




TRACK OPTIONS



2ALGDX0001E-20W



20W 110° 4000K



20W 110° 4000K


Dist(m)	EnaDir(k)	Dh(Div_B(m))	S_B(sq.m)	Eav_B(k)
1.0	670.12	2.41/2.07	3.9	152.43
2.0	167.53	4.81/4.14	15.6	38.11
3.0	74.46	7.22/6.21	35.2	16.94
4.0	41.88	9.63/8.28	62.5	9.53
5.0	26.80	12.04/10.34	97.7	6.10

Dv Beam Angle(B) H100: 6 V91: 9 Field angle(F): H158: 1 V154: 1




2ALGDX0001E-20W-4L

POWER: 20W
CRI: 90
LUMEN: 1614Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L304*W50*H34mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




2ALGDX0001E-28W-4L

POWER: 28W
CRI: 90
LUMEN: 2443Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L604*W50*H34mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



2ALGDX0001E-36W-4L

POWER: 36W
CRI: 90
LUMEN: 2925Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L904*W50*H34mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI




COLOR FINISHINGS:



Black




White

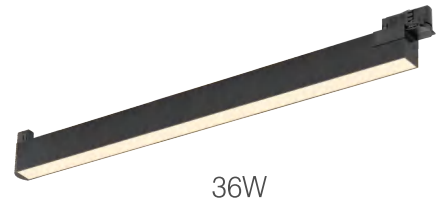


2ALGDX0001S-20W-4L

POWER: 20W
CRI: 90
LUMEN: 1701lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L340*W34*H75mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




2ALGDX0001S-28W-4L

POWER: 28W
CRI: 90
LUMEN: 2443lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L640*W34*H75mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



2ALGDX0001S-36W-4L


POWER: 36W
CRI: 90
LUMEN: 3149lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L940*W34*H75mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White

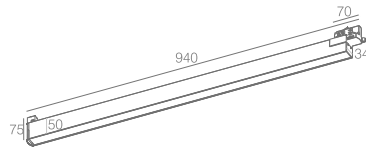

RECOMMEND



ON/OFF

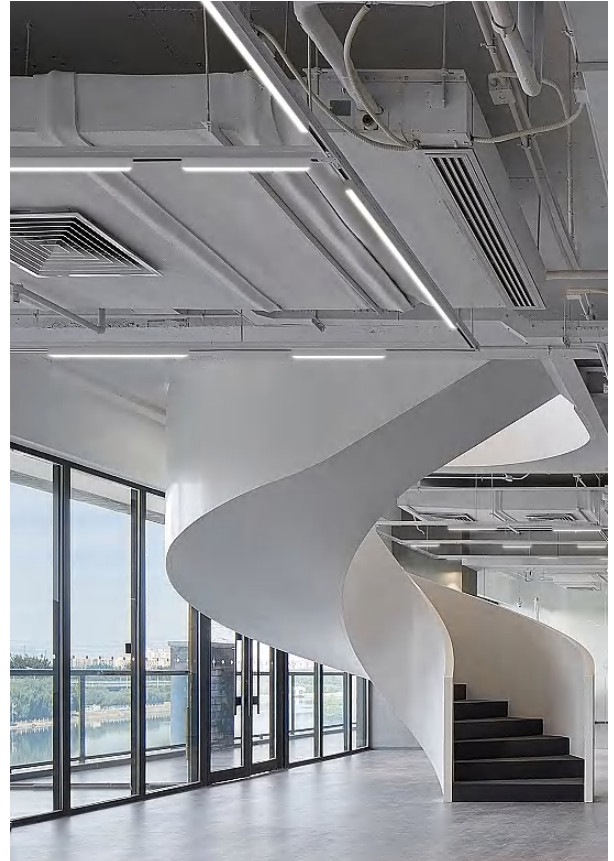


190

2ALGDX0001S-20W




ANGLE 110°

20W 110° 4000K



20W 110° 4000K




2ALGDX0001S-28W




ANGLE 110°


28W 110° 4000K



28W 110° 4000K



TRACK OPTIONS





2L

3L


4L




191

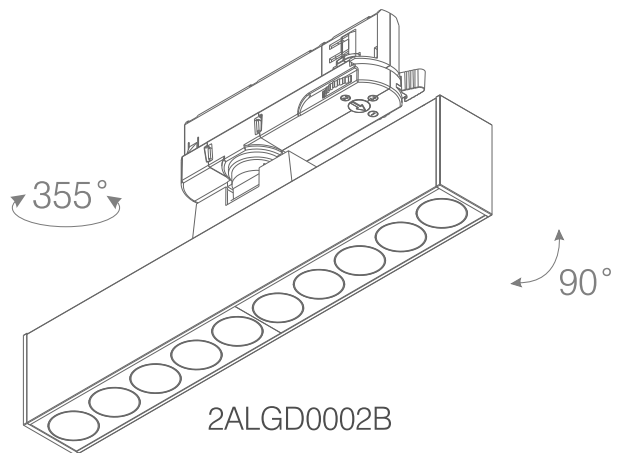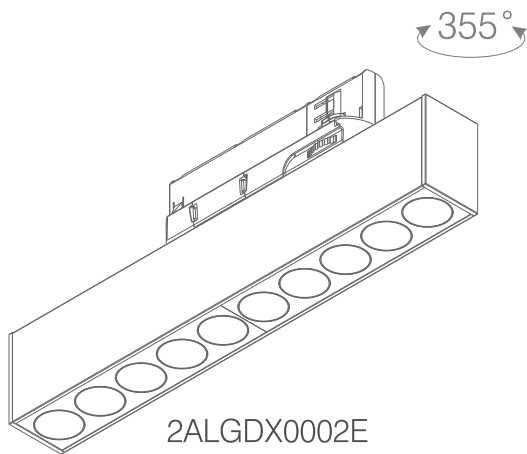


TRACK OPTIONS




2L



3L



4L



24W




18W



9W


2ALGD0002B-9W-4L

POWER: 9W
CRI: 90
LUMEN: 736Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L270*W34*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




2ALGD0002B-18W-4L

POWER: 18W
CRI: 90
LUMEN: 1473Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L402*W34*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



2ALGD0002B-24W-4L

POWER: 24W
CRI: 90
LUMEN: 2162Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L667*W34*H128mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC




DALI

2ALGD0002B-18W




ANGLE 38°

OTHER VERSIONS



15° 24°

18W 38° 4000K




18W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2976.97	0.72/0.73	0.4	1235.17
2.0	744.24	1.44/1.46	1.7	308.79
3.0	330.77	2.16/2.19	3.8	137.24
4.0	186.06	2.88/2.92	6.7	77.20
5.0	119.08	3.59/3.64	10.5	49.41


Dv Beam Angle(B): H39.5 V40.1 Field angle(F): H66.0 V66.7

2ALGD0002B-24W




ANGLE 38°

OTHER VERSIONS



15° 24°

24W 38° 4000K



24W 38° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4459.06	0.68/0.73	0.4	1884.50
2.0	1114.76	1.36/1.42	1.6	471.13
3.0	495.45	2.03/2.13	3.5	209.39
4.0	278.69	2.71/2.84	6.3	117.78
5.0	178.36	3.39/3.55	9.8	75.38

Dv Beam Angle(B): H37.5 V39.0 Field angle(F): H65.4 V66.1


2ALGDX0002E



18W

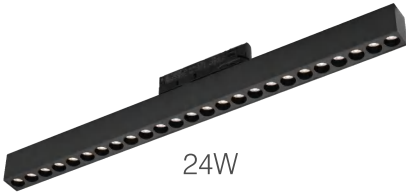


24W

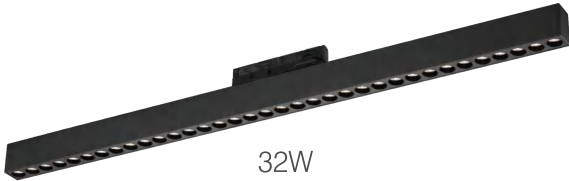

32W




TRACK OPTIONS



2ALGDX0002E-18W-4L

POWER: 18W
CRI: 90
LUMEN:1473Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L402*W34*H103mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC




DALI

2ALGDX0002E-18W




OTHER VERSIONS






2ALGDX0002E-24W-4L

POWER: 24W
CRI: 90
LUMEN:2162Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L667*W34*H103mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



2ALGDX0002E-32W-4L


POWER: 32W
CRI: 90
LUMEN:2866Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L932*W34*H103mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White

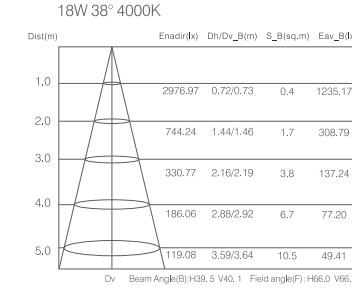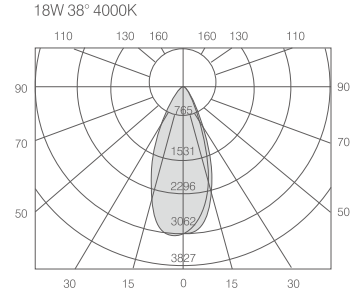




2ALGDX0002S-18W-4L

POWER: 18W
CRI: 90
LUMEN: 1473Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L437.5*W36*H75mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




2ALGDX0002S-24W-4L

POWER: 24W
CRI: 90
LUMEN: 2162Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L702*W36*H75mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



2ALGDX0002S-32W-4L


POWER: 32W
CRI: 90
LUMEN: 2866Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L967*W36*H75mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




RECOMMEND




TRACK OPTIONS




2ALGDX0002S-18W



OTHER VERSIONS



18W 38° 4000K



18W 38° 4000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2976.97	0.72/0.73	0.4	1235.17
2.0	744.24	1.44/1.46	1.7	308.79
3.0	330.77	2.16/2.19	3.8	137.24
4.0	186.06	2.88/2.92	6.7	77.20
5.0	119.08	3.59/3.64	10.5	49.41

2ALGD80053




TRACK OPTIONS



2ALGD80053-20W



20W 110° 4000K

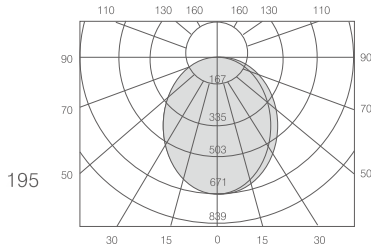

20W 110° 4000K


Dist(m)	EnaDir(°)	Dh(Div_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	670.12	2.41/2.07	3.9	152.43
2.0	167.53	4.81/4.14	15.6	38.11
3.0	74.46	7.22/6.21	35.2	16.94
4.0	41.88	9.63/8.28	62.5	9.53
5.0	26.80	12.04/10.34	97.7	6.10

Dv Beam Angle(B): H100: 6 V91: 9 Field angle(F): H158: 1 V154: 1




2ALGD80053-20W-4L

POWER: 20W
CRI: 90
LUMEN: 1614Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L383*W26*H78mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




2ALGD80053-28W-4L

POWER: 28W
CRI: 90
LUMEN: 2443Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L509*W26*H78mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



2ALGD80053-36W-4L

POWER: 36W
CRI: 90
LUMEN: 2925Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L761*W26*H78mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V



DALI

COLOR FINISHINGS:




Black




White



18W

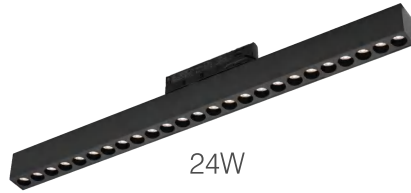


24W

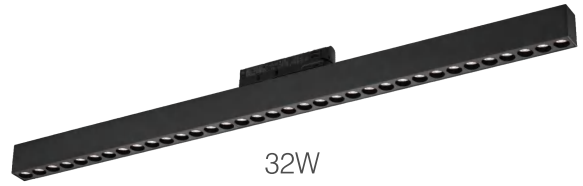

32W



TRACK OPTIONS



2L


3L

4L



2ALGD80052-18W-4L

POWER: 18W
CRI: 90
LUMEN: 1473Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L383*W26*H78mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS




DIM TRIAC



DALI


2ALGD80052-24W-4L

POWER: 24W
CRI: 90
LUMEN: 2162Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L509*W26*H78mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




2ALGD80052-32W-4L

POWER: 32W
CRI: 90
LUMEN: 2866Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L761*W26*H78mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




2ALGD80052-18W



ANGLE 38°


OTHER VERSIONS



15°

24°

18W 38° 4000K




18W 38° 4000K

Dist(m)	Enrad(lx)	Dh/Dv_B(m)	S_B(sq-m)	Eav_B(lx)
1.0	2976.97	0.72/0.73	0.4	1235.17
2.0	744.24	1.44/1.46	1.7	308.79
3.0	330.77	2.16/2.19	3.8	137.24
4.0	186.06	2.88/2.92	6.7	77.20
5.0	119.08	3.59/3.64	10.5	49.41


Dv Beam Angle(B): H38.5 V40.1 Field angle(F): H66.0 V66.7

2ALGDx0005E SERIES







12W



18W




24W




2ALGDX0005E-12W-4L

POWER: 12W
CRI: 90
LUMEN: 1181lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L234*W32.5*H111.7mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White




2ALGDX0005E-18W-4L

POWER: 24W
CRI: 90
LUMEN: 1571lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L349*W32.5*H111.7mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



2ALGDX0005E-24W-4L

POWER: 24W
CRI: 90
LUMEN: 2338lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L462*W32.5*H111.7mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V




DALI

TRACK OPTIONS



2ALGDX0005E-12W



ANGLE 38°


OTHER VERSIONS



15°

24°

12W 38° 4000K




12W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2370.08	0.69/0.73	0.4	983.74
2.0	592.52	1.38/1.45	1.6	245.93
3.0	263.34	2.07/2.18	3.6	109.30
4.0	148.13	2.76/2.90	6.4	61.48
5.0	64.80	3.46/3.63	10.0	39.35

Dv Beam Angle(B): H38.1 V39.9 Field angle(F): H67.6 V68.9

2ALGDX0005E-18W



ANGLE 38°


OTHER VERSIONS



15°

24°

18W 38° 4000K




18W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3139.70	0.68/0.71	0.4	1327.93
2.0	784.92	1.36/1.42	1.6	331.98
3.0	348.86	2.04/2.12	3.6	147.55
4.0	196.23	2.72/2.83	6.4	83.00
5.0	125.59	3.40/3.54	9.9	53.12

Dv Beam Angle(B): H37.6 V39.0 Field angle(F): H66.9 V68.2

2ALGDX0005E-24W



ANGLE 38°


OTHER VERSIONS



15°

24°

24W 38° 4000K




24W 38° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4837.05	0.70/0.72	0.4	1996.93
2.0	1209.26	1.39/1.44	1.6	499.23
3.0	537.45	2.09/2.16	3.6	221.88
4.0	302.32	2.79/2.88	6.3	124.81
5.0	193.48	3.48/3.59	9.9	79.88

Dv Beam Angle(B): H38.4 V39.5 Field angle(F): H67.0 V68.2

2ALGDX0006E

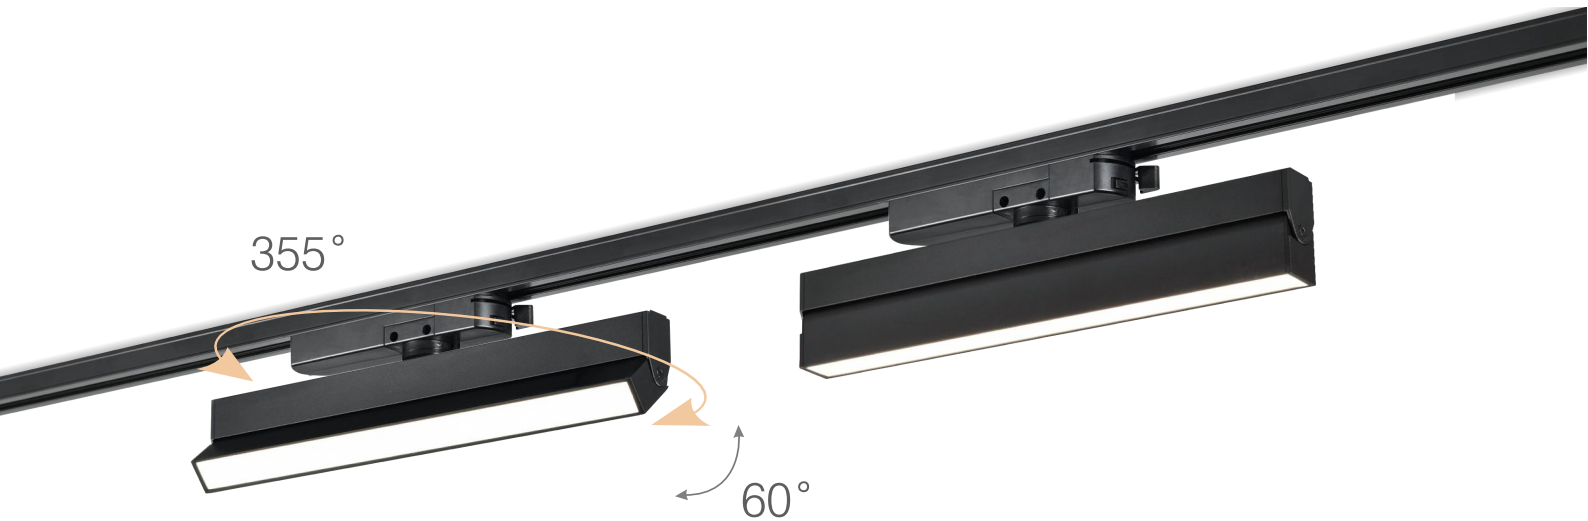

199




2ALGDX0006E-12W



ANGLE 110°




12W 110° 4000K




12W 110° 4000K

Dist(m)	Enrad(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	400.28	2.70/2.34	5.0	84.26
2.0	100.07	5.40/4.68	20.0	21.07
3.0	44.48	8.10/7.02	45.0	9.36
4.0	25.02	10.80/9.36	80.0	5.27
5.0	16.01	13.51/11.70	125.0	3.37

Dv: Beam.Angle(B):110.7.0 V98.0 Field.angle(F):1160.2 V152.1

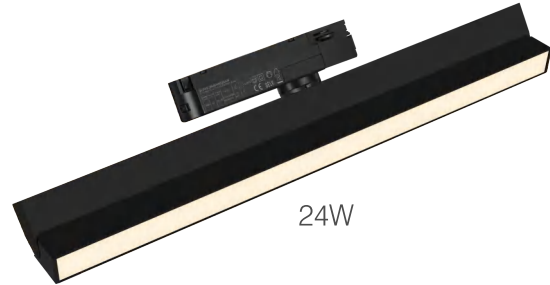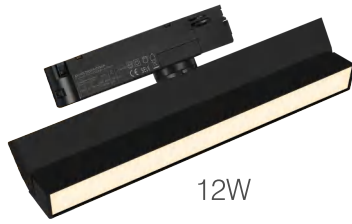


TRACK OPTIONS





2ALGDX0006E-12W-4L

POWER: 12W
CRI: 90
LUMEN: 1024Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L307*W32.4*H111.7mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



2ALGDX0006E-24W-4L

POWER: 24W
CRI: 90
LUMEN: 2028Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L601*W32.4*H111.7mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White

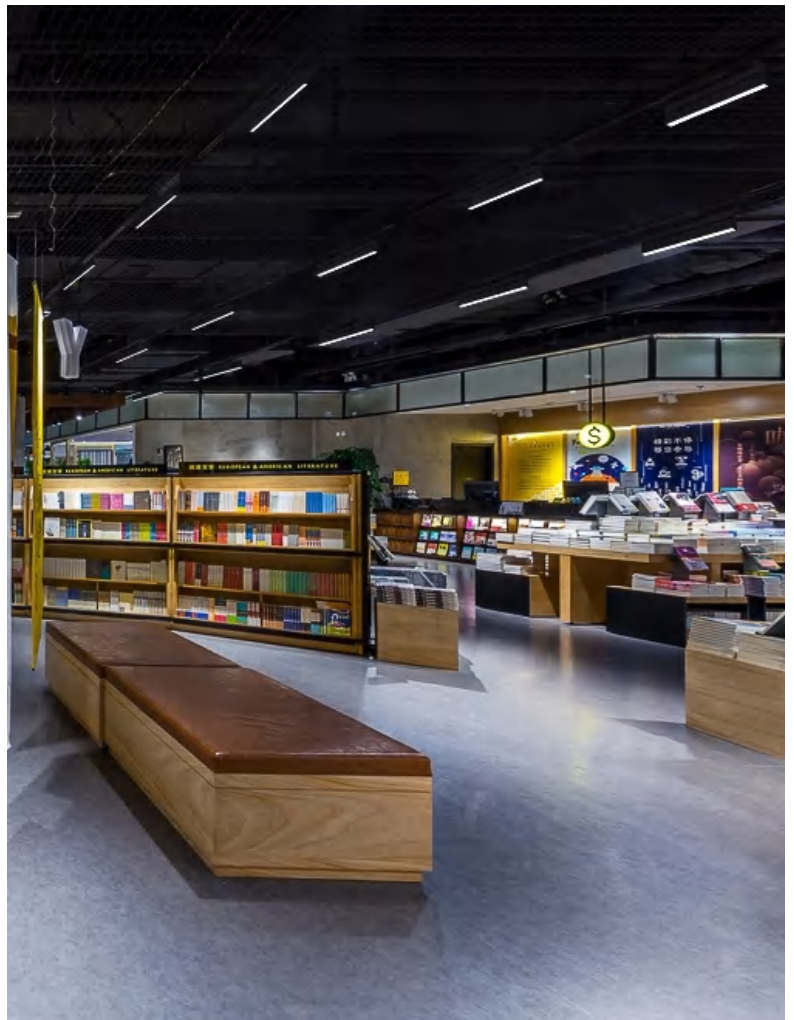

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC



DIM 0-10V



DALI

ALGD80107B



16W




24W




ALGD80107B-16W

POWER: 16W
CRI: 90
LUMEN:1469Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L270*W77*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White+Black



ALGD80107B-24W

POWER: 24W
CRI: 90
LUMEN:2587Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: L385*W77*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White+Black



201

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC



DALI

TRACK OPTIONS



2L




3L



4L

ALGD80107B-16W




ANGLE 60°

OTHER VERSIONS



90°

16W 60° 4000K




16W 60° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1082.81	1.37/1.37	1.5	366.09
2.0	270.70	2.74/2.74	5.9	91.52
3.0	120.31	4.11/4.11	13.3	40.68
4.0	67.68	5.48/5.47	23.6	22.88
5.0	43.31	6.85/6.84	36.8	14.64

Dv Beam Angle(B):H68.8 V68.8 Field angle(F):H82.3 V81.9

ALGD80107B-24W




ANGLE 60°

OTHER VERSIONS



90°

24W 60° 4000K




24W 60° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2339.30	1.33/1.33	1.4	801.58
1.6	913.79	2.13/2.13	3.6	313.15
2.0	584.83	2.67/2.66	5.6	200.39
2.5	389.72	3.27/3.26	8.4	133.51
3.0	259.92	4.00/3.99	12.5	89.06

Dv Beam Angle(B):H67.4 V67.2 Field angle(F):H83.0 V83.0



ALGD80107

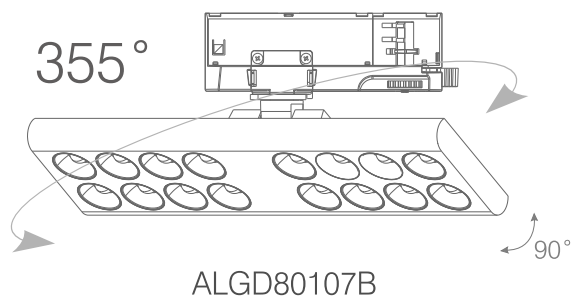

80107-80108 SERIES

ALGD80107




16W



24W


ALGD80107-16W

POWER: 16W
CRI: 90
LUMEN: 1469lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L270*W77*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White+Black



ALGD80107-24W

POWER: 24W
CRI: 90
LUMEN: 2587lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L385*W77*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White+Black




203


RECOMMEND OTHER VERSIONS



TRACK OPTIONS



ALGD80107-16W




ANGLE 60°

OTHER VERSIONS



90°


16W 60° 4000K



16W 60° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1082.81	1.37/1.37	1.5	366.09
2.0	270.70	2.74/2.74	5.9	91.52
3.0	120.31	4.11/4.11	13.3	40.68
4.0	67.68	5.48/5.47	23.6	22.88
5.0	43.31	6.85/6.84	36.8	14.64

ALGD80107-24W




ANGLE 60°

OTHER VERSIONS



90°

24W 60° 4000K



24W 60° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2339.30	1.33/1.33	1.4	801.58
1.6	913.79	2.13/2.13	3.6	313.15
2.0	584.83	2.67/2.66	5.6	200.39
2.5	389.72	3.27/3.26	8.4	133.51
3.0	259.92	4.00/3.99	12.5	89.06




24W



36W


ALGD80108-24W

POWER: 24W
CRI: 90
LUMEN: 2402lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L270*W106*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White + Black



ALGD80108-36W

POWER: 36W
CRI: 90
LUMEN: 3753lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L385*W106*H16mm
BEAM ANGLE: 60°/90°
FINISHED COLOR: Black/White/White + Black



RECOMMEND OTHER VERSIONS




ON/OFF



DIM TRIAC



DALI



355°

TRACK OPTIONS




2L




3L



4L

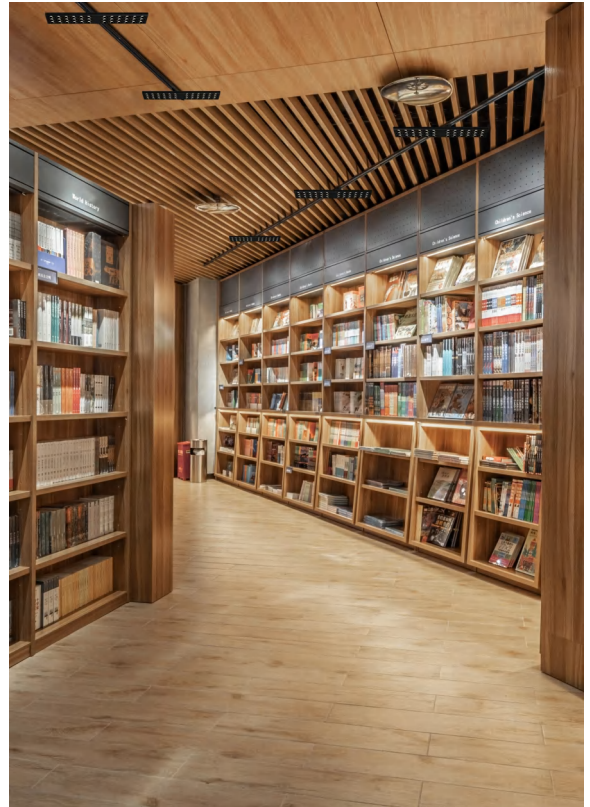

ALGD80108-24W




ANGLE 60°

OTHER VERSIONS



90°

24W 60° 4000K




24W 60° 4000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1828.83	1.51/1.51	1.8	584.64
1.6	714.39	2.42/2.41	4.6	228.37
2.0	457.39	3.02/3.02	7.2	146.16
2.5	304.68	3.70/3.70	10.8	97.40
3.0	203.20	4.53/4.53	16.2	64.96

Dv Beam Angle(B): H74. 1 V74. 1 Field angle(F): H86.8 V86.8

ALGD80108-36W




ANGLE 60°

OTHER VERSIONS



90°

36W 60° 4000K



36W 60° 4000K

Dist(m)	Enad(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3500.31	1.30/1.37	1.3	1210.28
1.6	1367.31	2.08/2.10	3.4	752.76
2.0	875.08	2.61/2.63	5.4	302.57
2.5	583.14	3.19/3.22	8.1	201.63
3.0	388.92	3.91/3.94	12.1	134.48

Dv Beam Angle(B): H66. 2 V66. 6 Field angle(F): H82.2 V82.4

ALGD0686B




36W



75W


ALGD0686B-36W

POWER: 36W
CRI: 80
LUMEN: 4617Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L577.5*W126.5*H98mm
BEAM ANGLE: 30°/50°/75°/2*20°
FINISHED COLOR: Black/White



ALGD0686B-75W

POWER: 75W
CRI: 80
LUMEN: 9234Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L577.5*W187.5*H98mm
BEAM ANGLE: 30°/50°/75°/2*20°
FINISHED COLOR: Black/White



205

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 0-10V




DALI




TRACK OPTIONS



2L




3L



4L

ALGD0686B-36W



ANGLE 50°

OTHER VERSIONS



30°




75°



2*20°

36W 50° 4000K




36W 50° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4455.20	0.96/0.91	0.7	1670.04
2.5	712.83	2.39/2.29	4.3	267.21
3.0	495.02	2.87/2.74	6.2	185.56
3.5	363.69	3.35/3.20	8.4	136.33
4.5	220.01	4.30/4.12	13.9	82.47

Dv Beam Angle(B): H51.1 V49.2 Field angle(F): H54.6 V57.1

ALGD0686B-75W



ANGLE 75°

OTHER VERSIONS



30°




50°



2*20°

75W 75° 4000K



75W 75° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4508.86	1.49/1.46	1.7	1461.08
2.5	721.42	3.73/6.65	10.8	233.77
3.0	500.98	4.48/4.38	15.5	162.34
3.5	368.07	5.22/5.11	21.1	119.27
4.5	222.66	6.72/6.57	34.9	72.15

Dv Beam Angle(B): H73.5 V72.3 Field angle(F): H145.9 V149.5




36W



75W


ALDD0686B-36W

POWER: 36W
CRI: 80
LUMEN: 4617lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L577.5*W126.5*H1500mm
BEAM ANGLE: 30°/50°/75°/2*20°
FINISHED COLOR: Black/White



ALDD0686B-75W

POWER: 75W
CRI: 80
LUMEN: 4617lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L577.5*W187.5*H1500mm
BEAM ANGLE: 30°/50°/75°/2*20°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



ON/OFF




DIM TRIAC



DIM 0-10V



DALI

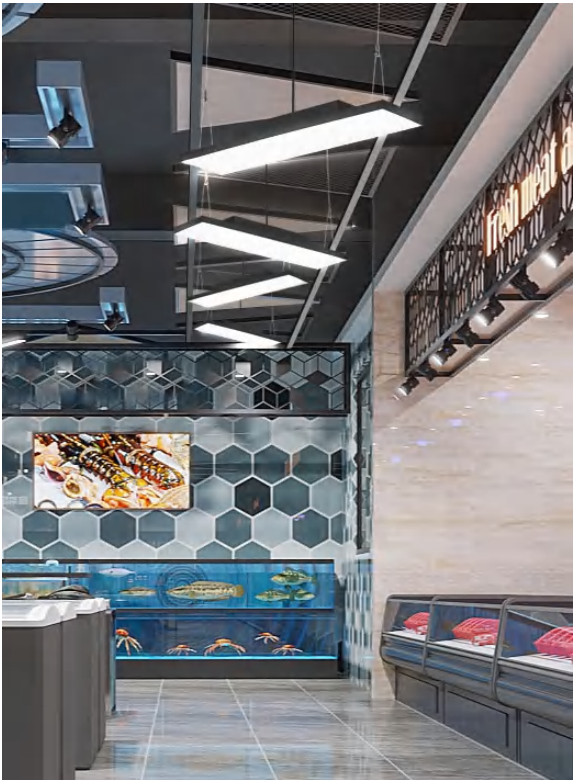

ALDD0686B-36W




ANGLE 50°

OTHER VERSIONS



30° 75° 2*20°


36W 50° 4000K



36W 50° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_R(m))	S_B(sq.m)	Eav_R(lx)
1.0	4455.20	0.96/0.91	0.7	1670.04
2.5	712.83	2.39/2.29	4.3	267.21
3.0	495.02	2.87/2.74	6.2	185.56
3.5	363.69	3.35/3.20	8.4	136.33
4.5	220.01	4.30/4.12	13.9	82.47

ALDD0686B-75W




ANGLE 75°

OTHER VERSIONS



30° 50° 2*20°

75W 75° 4000K



75W 75° 4000K

Dist(m)	Enadir(lx)	Dh(Dv_R(m))	S_B(sq.m)	Eav_R(lx)
1.0	4508.86	1.49/1.46	1.7	1461.08
2.5	721.42	3.73/6.65	10.8	233.77
3.0	500.98	4.48/4.38	15.5	162.34
3.5	368.07	5.22/5.11	21.1	119.27
4.5	222.66	6.72/6.57	34.9	72.15

ALTH80112



36W



50W



60W

ALTH80112-36W

POWER: 36W
CRI: 90
LUMEN: 4484Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø520*H57mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold




ALTH80112-50W

POWER: 50W
CRI: 90
LUMEN: 4959Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø650*H57mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold

ALTH80112-60W

POWER: 60W
CRI: 90
LUMEN: 5806Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø850*H57mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold

207



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 1-10V



DALI

COLOR FINISHINGS:



Black



White



Gold





36W



40W



60W


COLOR FINISHINGS:



80W


ALDD80112-36W

POWER: 36W
CRI: 90
LUMEN: 4239lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø650*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



ALDD80112-40W

POWER: 40W
CRI: 90
LUMEN: 4442lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø850*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 1-10V



DALI


ALDD80112-60W

POWER: 60W
CRI: 90
LUMEN: 7421lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1050*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



ALDD80112-80W

POWER: 80W
CRI: 90
LUMEN: 8277lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø1250*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold

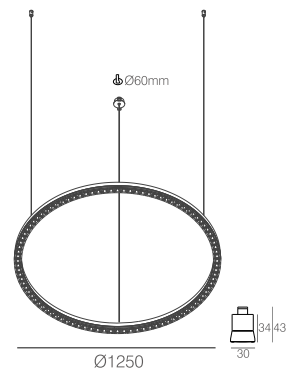

RECOMMEND



ON/OFF

OTHER VERSIONS





DIM TRIAC



DALI

ALDD80116

COLOR FINISHINGS:

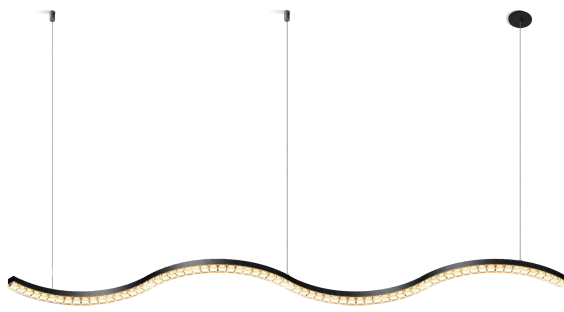

36W




50W

ALDD80116-36W


POWER: 36W
CRI: 90
LUMEN: 4239Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L850*W650*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold

209

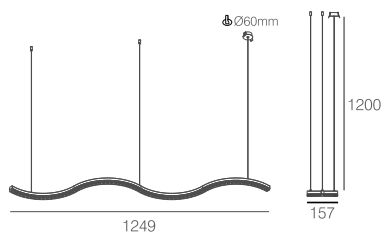

ALDD80116-50W

POWER: 50W
CRI: 90
LUMEN: 4983Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1775*W211*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold

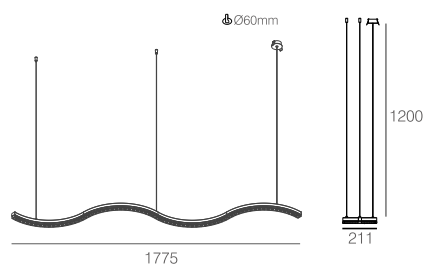

RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 1-10V



DALI






36W

COLOR FINISHINGS:



ALDD80117-36W

POWER: 36W
CRI: 90
LUMEN: 4239Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L850*W650*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



RECOMMEND



ON/OFF

OTHER VERSIONS




DIM TRIAC




DIM 1-10V



DALI

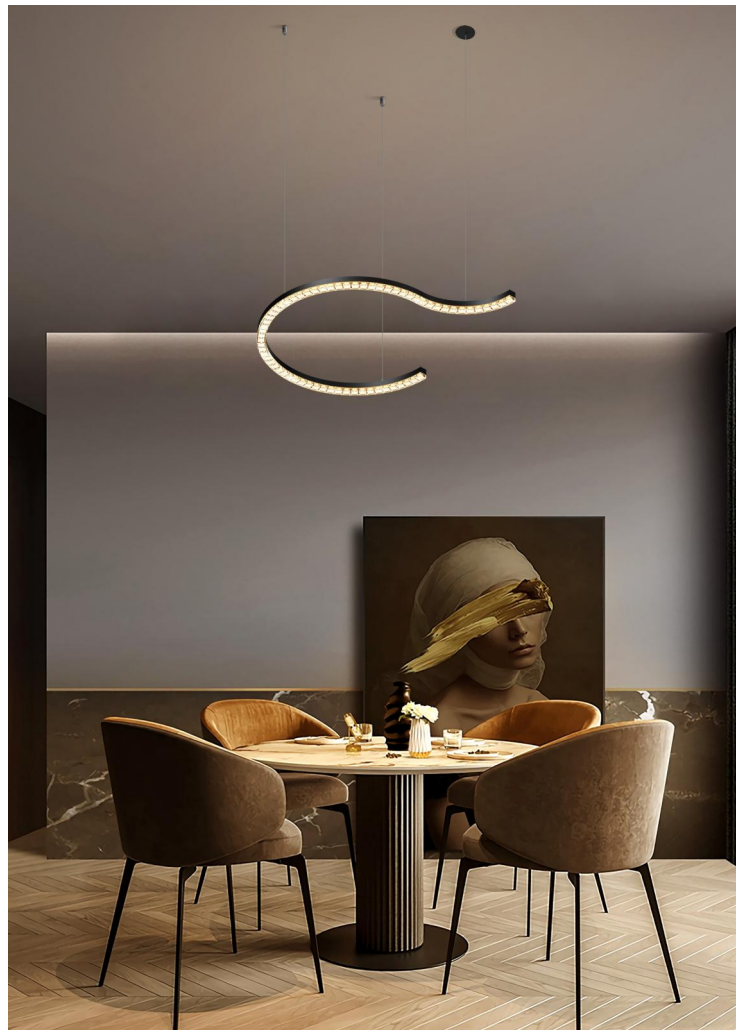


ALDD80113

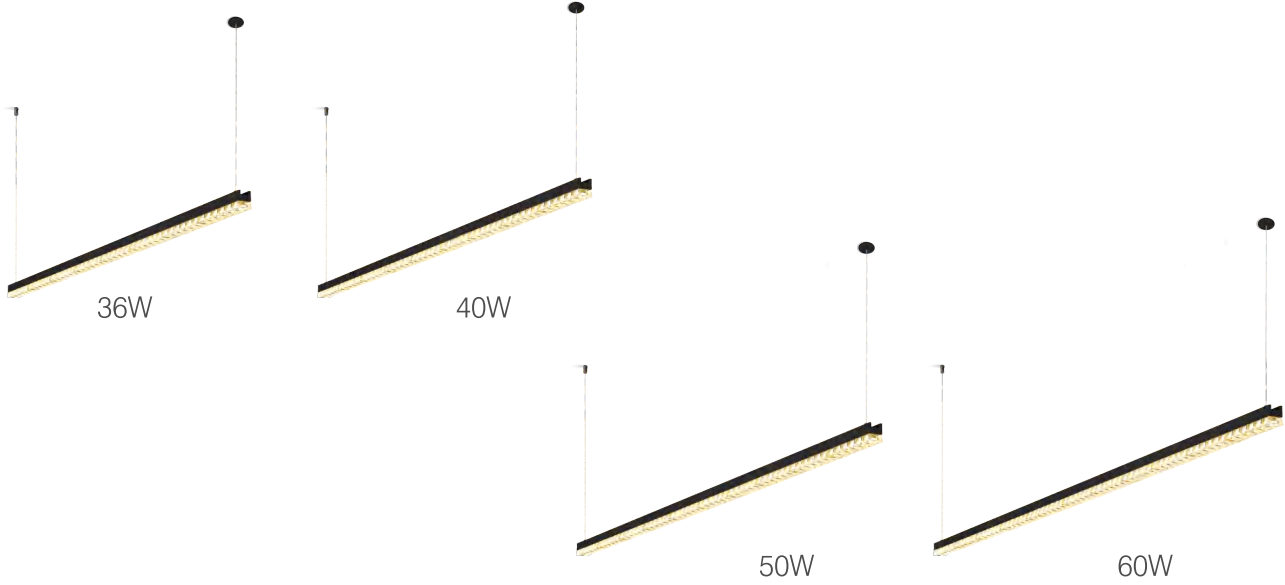

211


ALDD80113-36W

POWER: 36W
CRI: 90
LUMEN: 3111Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1258*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



ALDD80113-40W

POWER: 40W
CRI: 90
LUMEN: 4782Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1572*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 1-10V



DALI


ALDD80113-50W

POWER: 50W
CRI: 90
LUMEN: 4983Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1885*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



ALDD80113-60W

POWER: 60W
CRI: 90
LUMEN: 7435Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L2355*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 45°
FINISHED COLOR: Black/White/Gold



RECOMMEND OTHER VERSIONS



ON/OFF



DIM TRIAC



DIM 1-10V



DALI

RECOMMEND OTHER VERSIONS




ON/OFF



DIM TRIAC



DALI

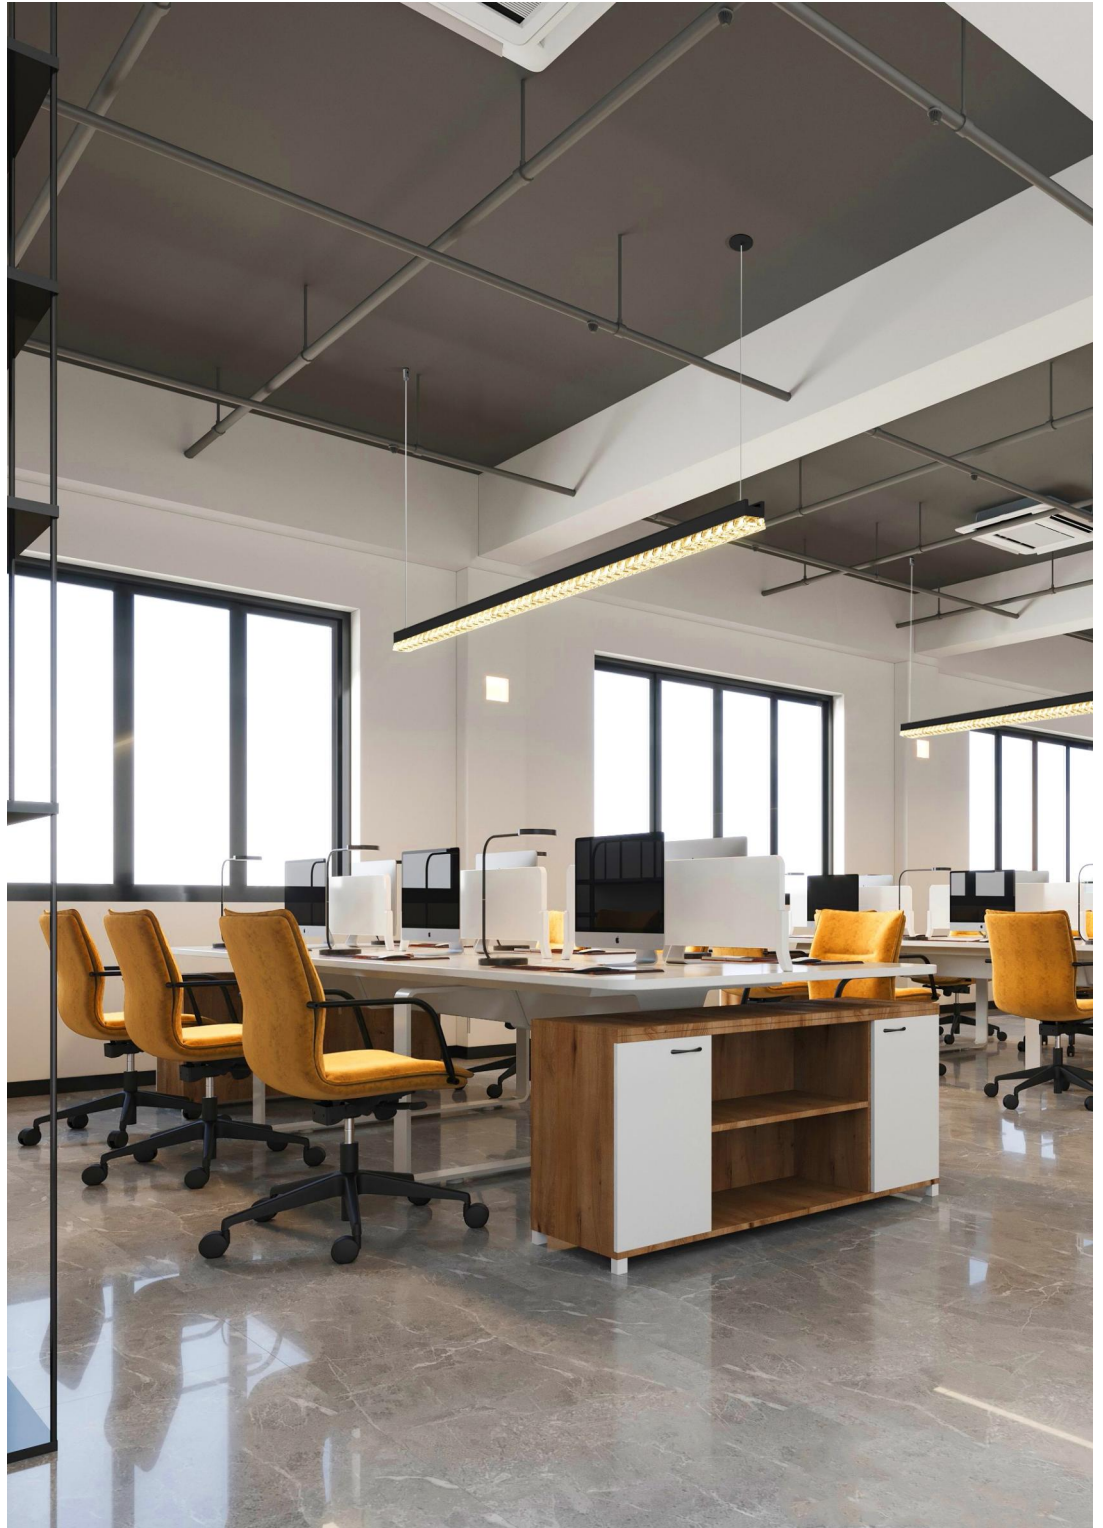

212

COLOR FINISHINGS:



Black



White



Gold

ALDD80118





ALDD80118-30W

POWER: 30W
CRI: 90
LUMEN: 2740Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L964*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black

ALDD80118-40W

POWER: 40W
CRI: 90
LUMEN: 3760Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1204*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 65°/80°
FINISHED COLOR: Black/White+Black



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V



DALI


ALDD80118-40W



OTHER VERSIONS





40W 65° 3000K




40W 65° 3000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3725.16	1.41/1.36	1.5	1252.17
2.0	931.29	2.82/2.72	6.0	313.04
3.0	413.91	4.23/4.08	13.6	139.13
4.0	232.82	5.64/5.44	24.1	78.26
5.0	149.01	7.04/6.80	37.7	50.09

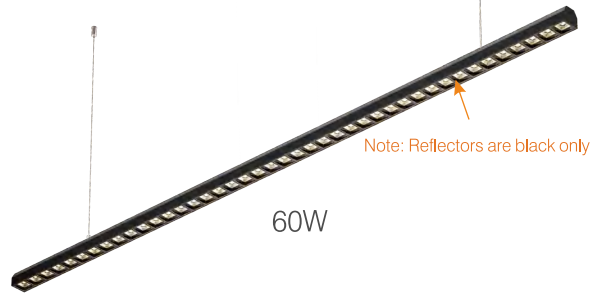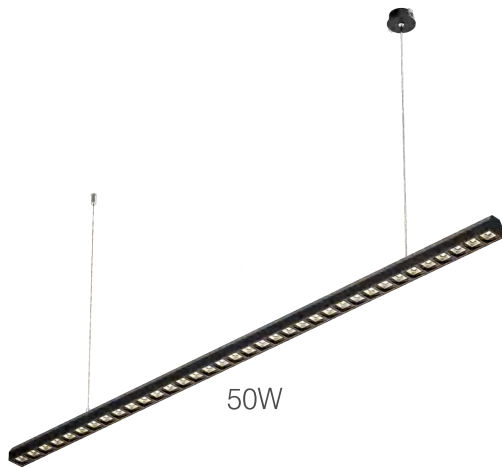

ALDD80118-50W

POWER: 50W
CRI: 90
LUMEN: 4872Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1444*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black



RECOMMEND



ON/OFF

OTHER VERSIONS



DIM TRIAC




DIM 0-10V



DALI

ALDD80118-60W

POWER: 60W
CRI: 90
LUMEN: 6117Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: L1924*H1200mm
HOLE SIZE: Ø60mm
BEAM ANGLE: 65°/ 80°
FINISHED COLOR: Black/White+Black

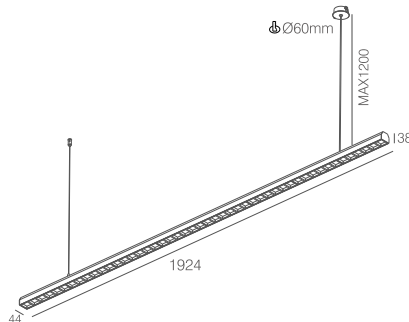

RECOMMEND



ON/OFF

OTHER VERSIONS



DIM 0-10V



DALI

ALDD0685A



15W



25W



33W

COLOR FINISHINGS:



ALXS0685A

ALDD0685A-15W

POWER: 15W
CRI: 90
LUMEN: 1264lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø75*H1500mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold



ALDD0685A-25W

POWER: 25W
CRI: 90
LUMEN: 2237lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø95*H1500mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold



ALDD0685A-33W

POWER: 33W
CRI: 90
LUMEN: 2801lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø105*H1500mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold



RECOMMEND

OTHER VERSIONS



ON/OFF



DIM TRIAC




DIM 0-10V




DALI

ALXS0685A-15W



ANGLE 38°

OTHER VERSIONS




ALXS0685A-25W




ANGLE 38°

OTHER VERSIONS




15W 38° 3000K



15W 38° 3000K

Dist(m)	Enad(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	2779.80	0.70/0.56	0.4	1147.82
2.0	694.95	1.40/1.40	1.6	286.95
2.5	444.77	1.75/1.76	2.4	183.65
3.5	226.92	2.46/2.46	4.8	93.70
4.5	137.27	3.16/3.16	7.9	56.68

25W 38° 3000K




25W 38° 3000K


Dist(m)	Enad(lx)	Dv(Dv_B(m))	S_B(sq.m)	Eav_B(lx)
1.0	3534.25	0.72/0.72	0.4	1455.28
2.0	883.56	1.43/1.43	1.6	363.82
2.5	565.48	1.79/1.79	2.5	232.84
3.5	288.51	2.51/2.50	4.9	118.80
4.5	174.53	3.23/3.22	8.2	71.87




ALXS0685A-33W



OTHER VERSIONS



33W 38° 3000K



33W 38° 3000K


Dist(m)	Enadir(lx)	Dh(Dv_R(m))	S_B(sq.m)	Eav_B(lx)
1.0	5674.27	0.66/0.67	0.3	2358.03
2.0	1418.57	1.32/1.34	1.4	589.51
2.5	907.88	1.65/1.67	2.2	377.28
3.5	463.21	2.31/2.34	4.2	192.49
4.5	280.21	2.96/3.01	7.0	116.45

Dv Beam Angle(B): H36.5 V37.0 Field angle(F): H60.7 V60.7



ALDD0580A SERIES

COLOR FINISHINGS:



Φ35/6W

Φ55/8W

White

Black

Golden

Silver




6W



8W


ALDD0580A-6W

POWER: 6W
CRI: 90
LUMEN: 492Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø35*H300mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 15°/24°/38°/50°
FINISHED COLOR: Black/White/Silver/Gold



ALDD0580A-8W

POWER: 8W
CRI: 90
LUMEN: 679Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H300mm
HOLE SIZE: Ø25mm
BEAM ANGLE: 10°/24°/38°
FINISHED COLOR: Black/White/Silver/Gold




RECOMMEND OTHER VERSIONS




ON/OFF



DIM TRIAC

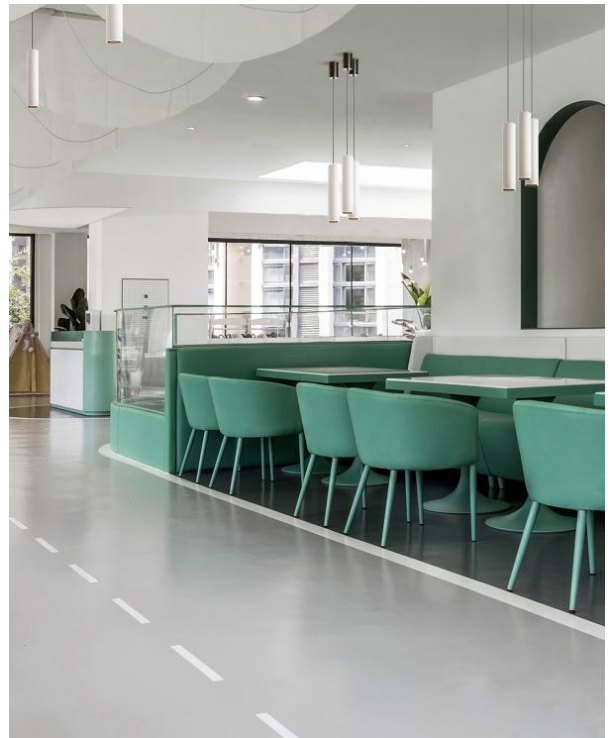


ALDD0580A-6W




ANGLE 38°

OTHER VERSIONS



6W 38° 3000K



6W 38° 3000K

Dist(m)	Enadir(lx)	Dth/Dv(m)	S _B (sq.m)	Eav _B (lx)
1.0	1178.84	0.62/0.62	0.3	495.18
2.0	294.71	1.24/1.24	1.2	123.80
2.5	188.61	1.56/1.55	1.9	79.23
3.5	96.23	2.18/2.17	3.7	40.42
4.5	58.21	2.80/2.79	6.1	24.45

Dv Beam Angle(B) H34.6 V34.4 Field angle(F) H59.8 V60.3


0697A



7W





12W



ALXS0697A-7W / ALGD0697A-7W

POWER: 7W
CRI: 90
UGR: < 19
LUMEN: 582Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø35*H140mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black/Gold+Black





RECOMMEND



ON/OFF

ALXS0697A-12W / ALGD0697A-12W

POWER: 12W
CRI: 90
UGR: < 19
LUMEN: 992Lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H200mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black/Gold+Black



RECOMMEND


OTHER VERSIONS




ON/OFF



DIM TRIAC

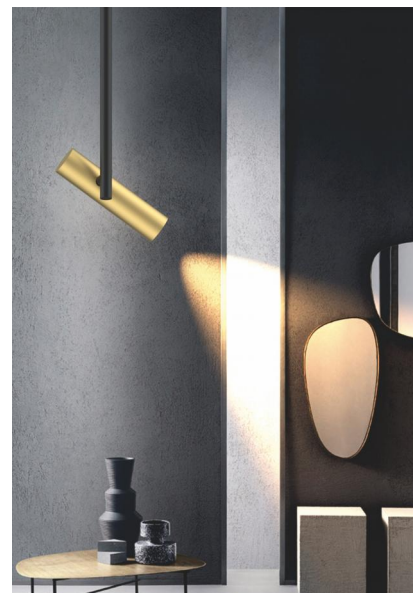

0697A-7W/12W



ANGLE 38°

OTHER VERSIONS



15°



24°

COLOR FINISHINGS:





Black+Black White+Black Gold+Black Black+Black White+Black Gold+Black





ALXS0697A-2*7W / ALGD0697A-2*7W

POWER: 7W
CRI: 90
UGR: < 19
LUMEN: 1162Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø35*H140mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black/Gold+Black



ALXS0697A-2*12W / ALGD0697A-2*12W


POWER: 2*12W
CRI: 90
UGR: < 19
LUMEN: 2642Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø55*H200mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black+Black/White+Black/Gold+Black




RECOMMEND




OTHER VERSIONS

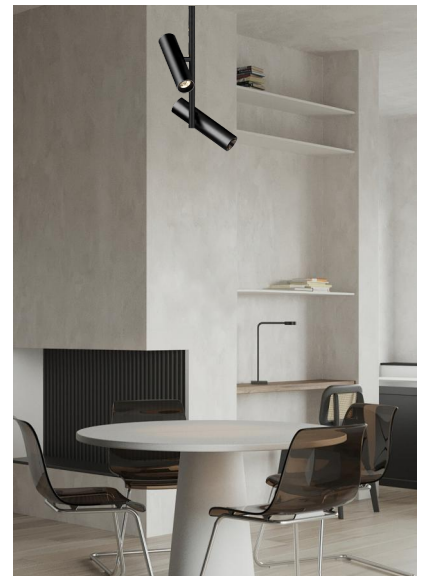

ALXS0697A-2*7W/2*12W



OTHER VERSIONS



COLOR FINISHINGS:





0690A-0696A SERIES

ALDD0690A




9W

223

ALDD0690A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 592Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø130*H305mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black

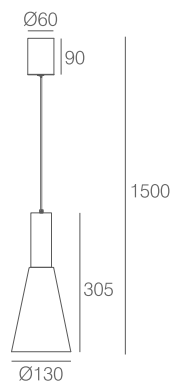

RECOMMEND

OTHER VERSIONS




ON/OFF



DIM TRIAC

ALDD0690A-9W



ANGLE 38°

OTHER VERSIONS



15°



24°





ALDD0691A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø63*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black

RECOMMEND




ON/OFF


OTHER VERSIONS




DIM TRIAC

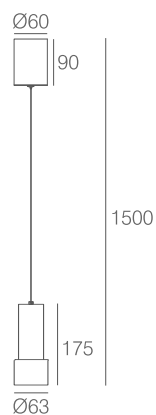


ALDD0691A-9W



OTHER VERSIONS



ALDD0692A

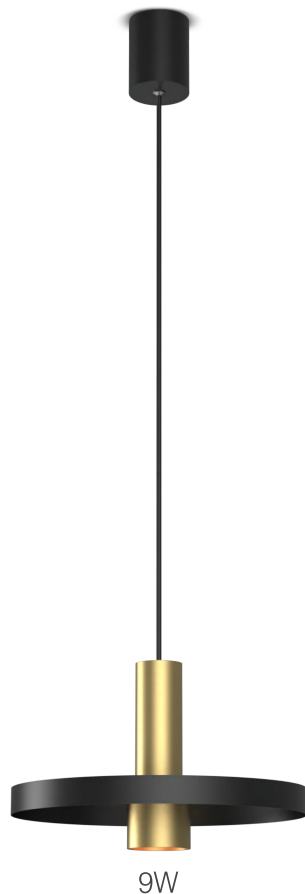


9W

225

ALDD0692A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø280*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black

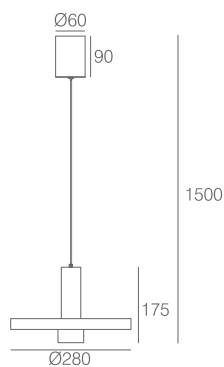

RECOMMEND

OTHER VERSIONS




ON/OFF



DIM TRIAC

ALDD0692A-9W



ANGLE 38°

OTHER VERSIONS




15°




24°




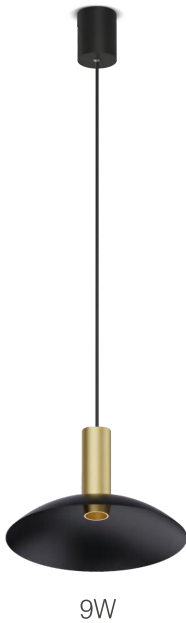

9W

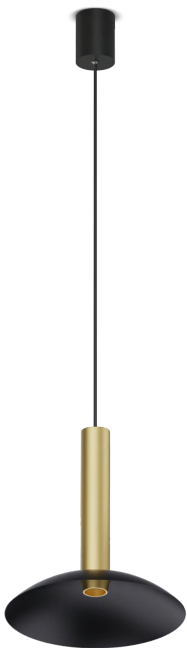

9W

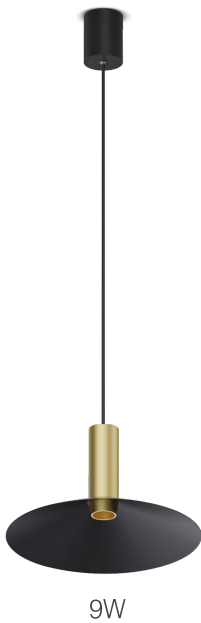


9W



9W


ALDD0693A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø280*H177mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black




ALDD0694A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø280*H305mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black




ALDD0695A-9W

POWER: 9W
CRI: 90
UGR: < 19
LLUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø300*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black



ALDD0696A-9W

POWER: 9W
CRI: 90
UGR: < 19
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø400*H305mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold + Black



RECOMMEND OTHER VERSIONS




ON/OFF



DIM TRIAC

ALDD0693A/ALDD0694A/ALDD0695A/ALDD0696A



ANGLE 38°

OTHER VERSIONS



15°



24°



WWW. REALIGHT.RS

**JURIJA GAGARINA 14M
11070 BELGRADE - SERBIA**

TEL +381 69 338 8123

OFFICE@REALIGHT.RS