




Realight

**Flexible magnetic
track lights**

2026/2027

LIGHTING


DC48V 05 SERIES CURVED LINEAR TRACK LIGHTING SYSTEM




2ALGD0580088



2ALGD0580089



2ALGD0580032




2ALGD0580045



2ALGD0580219



2ALGD0580033



2ALGD0580106




2ALGD0580043



2ALGD0580051



2ALGD0580030



2ALGD0580123



2ALGD0580063



2ALGD0580066



2ALGD0580040



2ALGD0580041




2ALGD0580125




2ALGD0580690



2ALGD0580691



2ALGD0580692



2ALGD0580693



2ALGD0580006



2ALGD0580025



2ALGD0580039



2ALGD0580060



ACCESSORIES

05 Series Track Rail & Accessories




Curved Track Rail

2C3GDT0520-2L-20M

20 meter


Black / White



Main Power Connector (External driver use only)

2C3GDT0503


Black / White



Track Rail Bracket

2C3GDT0504

Black / White




241



Track Rail Side Cap

2C3XJ0059

Black / White



05 Series Power Supply



Power Supply

2C1QD0315-100W

Input Voltage:AC220-240V 50/60Hz


Output Voltage:DC48V

Output Current:2.2A

Size

Ø110*H213mm

Black / White



Power Supply

2C1QD0315-200W

Input Voltage:AC220-240V 50/60Hz select by switch


Output Voltage:DC48V

Output Current:4.2A

Size

Ø132*H213mm

Black / White



POWER SUPPLY

05 Series External Power Supply



Meanwell Power Supply

2C1QD0005-100W

Input Voltage:AC85-264V

Output Voltage:DC48V

Output Current:0~2.3A

Size

L129*W97*H30mm



Meanwell Power Supply

2C1QD0007-200W

Input Voltage:AC90~132V/AC180~264V select by switch

Output Voltage:DC48V

Output Current:0~4.4A

Size

L215*W115*H30mm



Meanwell Power Supply

2C1QD0008-350W

Input Voltage:AC90~132V/AC180~264V select by switch

Output Voltage:DC48V

Output Current:0~7.3A

Size

L215*W115*H30mm



TUYA ZIGBEE EQUIPMENT

Optional



Tuya Zigbee Wireless Panel
2C1YK0009

Size
86*86mm



Tuya Zigbee Wired Panel
2C1YK0010

Size
86*86mm



Tuya Zigbee Remote Control
2C1YK0020

Size
155*45*10mm



Tuya Zigbee 4 inch Smart Screen
2C1YK0039



Tuya Zigbee 8 inch Smart Control Screen
2C1YK0021

Size
250*133*11mm



Bluetooth Panel
2C1YK0026

Size
86*86*6mm

Essential



Tuya Zigbee Wireless Gateway

2C1YK0040

Size
62*62mm



Tuya Zigbee Wired Gateway

2C1YK0023

Size
62*62mm



237

CE

IP20

48V DC



ZigBee®



Bluetooth


DC48V 05 SERIES Curved L



238



Linear Track Lighting System







2ALGD0580088-12W

POWER: 8W
CRI: ≥ 90
LUMEN: 963lm/5700K
CCT: 3000K/4000K/5000K(2700-5700K)
INPUT: 48V DC
DIMENSION: L257*W26*H32mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth

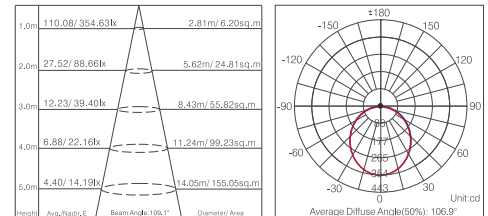


2ALGD0580088-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1442lm/5700K
CCT: 3000K/4000K/5000K(2700-5700K)
INPUT: 48V DC
DIMENSION: L382.5*W26*H32mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth

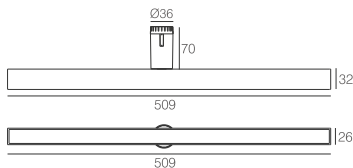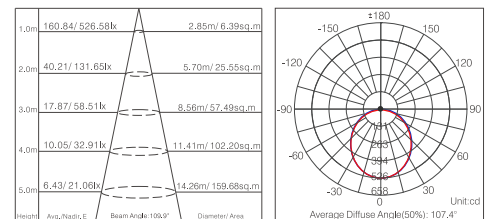

2ALGD0580088-24W

POWER: 24W
CRI: ≥ 90
LUMEN: 1890lm/5700K
CCT: 3000K/4000K/5000K(2700-5700K)
INPUT: 48V DC
DIMENSION: L509*W26*H32mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth

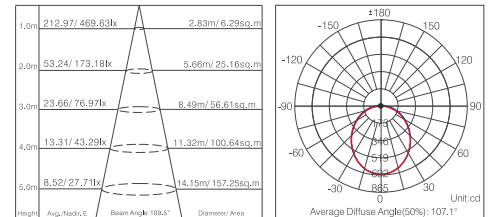

Optional Color




BK

WH







248





2ALGD0580089-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 875Lm/4000K
CCT: 3000K/4000K/5000K(2700-6000K)
INPUT: 48V DC
DIMENSION: L257*W26*H32mm
BEAM ANGLE: 24°/38°
Dimmable: Zigbee/ Bluetooth

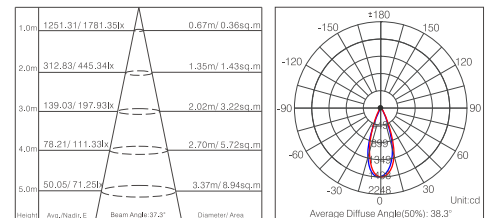


2ALGD0580089-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1320Lm/4000K
CCT: 3000K/4000K/5000K(2700-6000K)
INPUT: 48V DC
DIMENSION: L382.5*W26*H32mm
BEAM ANGLE: 24°/38°
Dimmable: Zigbee/ Bluetooth

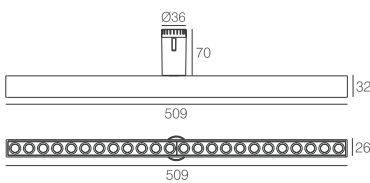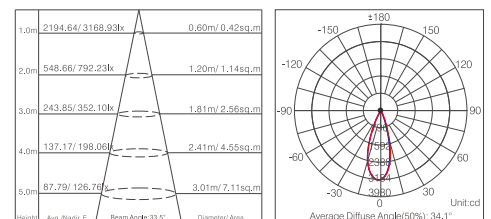

2ALGD0580089-24W

POWER: 24W
CRI: ≥ 90
LUMEN: 1958Lm/4000K
CCT: 3000K/4000K/5000K(2700-6000K)
INPUT: 48V DC
DIMENSION: L509*W26*H32mm
BEAM ANGLE: 24°/38°
Dimmable: Zigbee/ Bluetooth

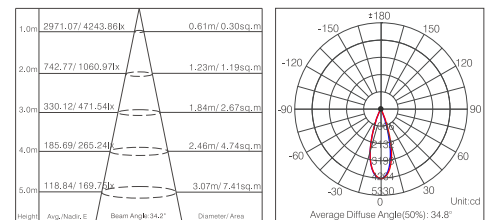

Optional Color




BK

WH





GETHER DES




2ALGD0580032-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 638Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø34*H85mm
BEAM ANGLE: 24°/38°/60°
Dimmable: Zigbee/Bluetooth






250





2ALGD0580032-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 1019Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H110mm
BEAM ANGLE: 24°/38°/60°
Dimmable: Zigbee/Bluetooth



2ALGD0580032-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1438Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø55*H140mm
BEAM ANGLE: 15°/24°/38°/60°
Dimmable: Zigbee/Bluetooth




Optional Color



BK




WH








2ALGD0580045-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 817lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø34*H90mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth





2ALGD0580045-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 965lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H110mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth



2ALGD0580045-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1344lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø55*H115mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK

WH

Optional + Honeycomb



BK


WH

2ALGD0580219




ANGLE 20-60°

253



2ALGD0580219-8W


POWER: 8W
CRI: ≥90
LUMEN: 607Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H100mm
BEAM ANGLE: 20°-60°
Dimmable: Zigbee/ Bluetooth



2ALGD0580219-18W

POWER: 18W
CRI: ≥90
LUMEN: 1804Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø55*H115mm
BEAM ANGLE: 20°-60°
Dimmable: Zigbee/ Bluetooth

1.0m	4167.44/ 11582.69lx	0.67m/ 0.35sq.m
2.0m	1041.86/ 2895.67lx	1.34m/ 1.42sq.m
3.0m	463.05/ 1286.97lx	2.02m/ 3.19sq.m
4.0m	260.46/ 723.92lx	2.69m/ 5.68sq.m
5.0m	166.70/ 463.31lx	3.36m/ 8.87sq.m



Optional Color




BK

WH




254



2ALGD0580033-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 671Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 75 \times H55$ mm
BEAM ANGLE: 15°/24°/38°/60°
Dimmable: Zigbee/Bluetooth

1.0m	1785.25/2549.07lx	0.54m/0.23sq.m
2.0m	446.31/637.27lx	1.08m/0.92sq.m
3.0m	198.36/283.23lx	1.62m/2.07sq.m
4.0m	111.58/159.32lx	2.16m/3.68sq.m
5.0m	71.41/101.99lx	2.71m/5.75sq.m
Height	Avg. Radiant E	Beam Angle 30.3° Diameter/ Area



Optional Color



BK




WH

2ALGD0580106






255






2ALGD0580106-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 1087Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 95 \times H45$ mm
BEAM ANGLE: 90°
Dimmable: Zigbee/ Bluetooth





2ALGD0580106-18W

LED POWER: 18W
CRI: ≥ 90
LUMEN: 1702Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 123 \times H45$ mm
BEAM ANGLE: 30°/ 60°
Dimmable: Zigbee/ Bluetooth




2ALGD0580106-24W

LED POWER: 24W
CRI: ≥ 90
LUMEN: 2476Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 153 \times H45$ mm
BEAM ANGLE: 30°/ 60°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK WH+GD WH+BK WH+GD



2ALGD0580043






257





2ALGD0580043-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 810/4000K
CCT: 3000K/4000K/5000K(2700-6500K)
INPUT: 48V DC
DIMENSION: $\varnothing 85 \times W 47 \text{mm}$
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth





2ALGD0580043-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1257/4000K
CCT: 3000K/4000K/5000K(2700-6500K)
INPUT: 48V DC
DIMENSION: $\varnothing 105 \times W 52 \text{mm}$
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth



2ALGD0580043-24W

POWER: 24W
CRI: ≥ 90
LUMEN: 1422/4000K
CCT: 3000K/4000K/5000K(2700-6500K)
INPUT: 48V DC
DIMENSION: $\varnothing 125 \times W 57 \text{mm}$
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK

WH






2ALGD0580051






259





2ALGD0580051-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1547/4000K
CCT: 3000K/4000K/5000K(2700-6500K)
INPUT: 48V DC
DIMENSION: Ø80*H90mm
BEAM ANGLE: 15°/24°/38°/45°/60°
Dimmable: Zigbee/ Bluetooth



2ALGD0580051-24W

POWER: 24W
CRI: ≥ 90
LUMEN: 1940/4000K
CCT: 3000K/4000K/5000K(2700-6500K)
INPUT: 48V DC
DIMENSION: Ø95*H100mm
BEAM ANGLE: 15°/24°/38°/45°/60°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK

WH






2ALGD0580030






261






2ALGD0580030-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 618Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø90*H56mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth





2ALGD0580030-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 1031Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120*H56mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth



2ALGD0580030-18W

POWER: 18W
CRI: ≥ 90
LUMEN: 1360Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø140*H56mm
BEAM ANGLE: 110°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK

WH






2ALGD0580123






263





2ALGD0580123-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 601Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø90*H38mm
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth



2ALGD0580123-12W

POWER: 12W
CRI: ≥ 90
LUMEN: 916Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120*H43mm
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth



Optional Color



BK WH BK+GD WH+GD



2ALGD0580063





265





2ALGD0580063-6WS

POWER: 6W
CRI: ≥ 90
LUMEN: 482Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø80mm
BEAM ANGLE: 210°
Dimmable: Zigbee/ Bluetooth





2ALGD0580063-6WM

POWER: 6W
CRI: ≥ 90
LUMEN: 755Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120mm
BEAM ANGLE: 210°
Dimmable: Zigbee/ Bluetooth



2ALGD0580063-6WL

POWER: 6W
CRI: ≥ 90
LUMEN: 755Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø150mm
BEAM ANGLE: 210°
Dimmable: Zigbee/ Bluetooth



Optional Color




BK

WH









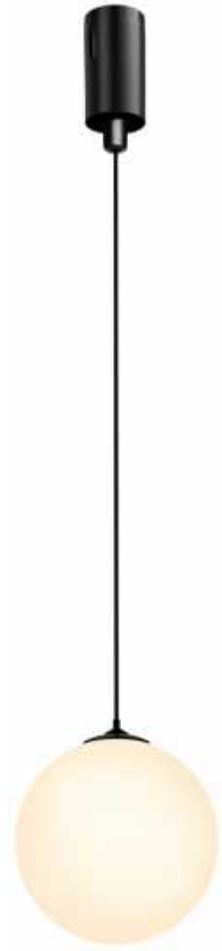


268





2ALGD0580066-6WS

POWER: 6W
CRI: ≥ 90
LUMEN: 482Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 80$ mm
BEAM ANGLE: 210°
Dimmable: Zigbee/Bluetooth





2ALGD0580066-6WM

POWER: 8W
CRI: ≥ 90
LUMEN: 755Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 120$ mm
BEAM ANGLE: 210°
Dimmable: Zigbee/Bluetooth



2ALGD0580066-6WL

POWER: 8W
CRI: ≥ 90
LUMEN: 755Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 150$ mm
BEAM ANGLE: 210°
Dimmable: Zigbee/Bluetooth



Optional Color



BK



WH



BK



WH


2ALGD0580040



2ALGD0580040-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 700Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø110mm
BEAM ANGLE: 160°
Dimmable: Zigbee/Bluetooth

1.0m	2.43/ 129.00lx	16.65m/ 217.76sq.m
2.0m	0.61/ 32.25lx	33.30m/ 871.03sq.m
3.0m	0.27/ 14.33lx	49.95m/ 1959.82sq.m
4.0m	0.15/ 8.06lx	66.60m/ 3484.12sq.m
5.0m	0.10/ 5.16lx	83.26m/ 5443.93sq.m



Optional Color



BK


WH

BK

WH




270




2ALGD0580041-6W

POWER: 6W
CRI: ≥ 90
LUMEN: 306Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 150$ mm
BEAM ANGLE: 210°
Dimmable: Zigbee/ Bluetooth

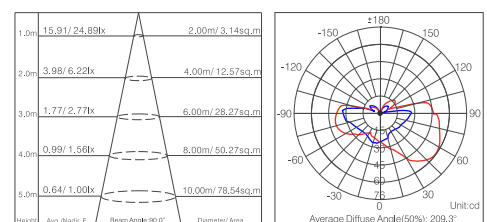

Optional Color



2ALGD0580125





271



2ALGD0580125-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 553Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 90 \times H85$ mm
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth


1.0m	176.77/ 1417.26lx	1.93m/ 2.92sq.m
2.0m	24.86/ 199.30lx	5.14m/ 20.74sq.m
3.0m	11.05/ 88.58lx	7.71m/ 46.67sq.m
4.0m	6.21/ 49.63lx	10.28m/ 82.98sq.m
5.0m	3.98/ 31.89lx	15.42m/ 129.65sq.m
Height	Avg./Maxlx, E	Diameter/ Area



2ALGD0580125-18W


POWER: 18W
CRI: ≥ 90
LUMEN: 1417Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 120 \times H115$ mm
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth

1.0m	315.38/ 2793.12lx	2.03m/ 3.25sq.m
2.0m	44.35/ 392.78lx	5.42m/ 23.08sq.m
3.0m	19.71/ 174.57lx	8.13m/ 51.94sq.m
4.0m	11.09/ 98.20lx	10.84m/ 92.34sq.m
5.0m	7.10/ 62.85lx	17.32m/ 144.28sq.m
Height	Avg./Maxlx, E	Diameter/ Area




Optional Color





2ALGD0580690-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 526Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø130*H305mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth





2ALGD0580691-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 545Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø63*H175mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth


Optional Color



2ALGD0580692, 2ALGD0580693

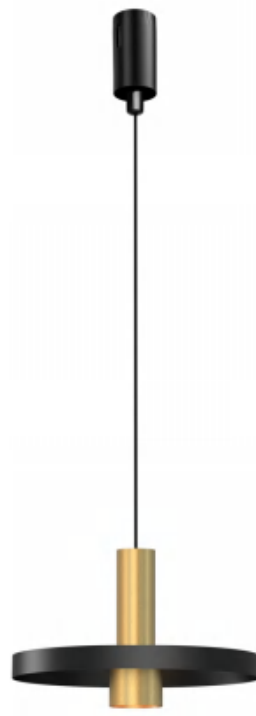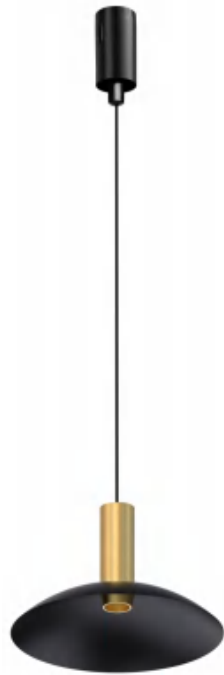


273



2ALGD0580692-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 545Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø280*H175mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth



2ALGD0580693-8W

POWER: 8W
CRI: ≥ 90
LUMEN: 605Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø280*H177mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth

Optional Color



BK+GD



BK



WH



BK+GD




BK



WH




274



2ALGD2280006-20W


POWER: 20W
CRI: ≥ 90
LUMEN: 1662Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 265 \times H15\text{mm}$
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth




2ALGD2280006-30W

POWER: 30W
CRI: ≥ 90
LUMEN: 2413Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: $\varnothing 265 \times H15\text{mm}$
BEAM ANGLE: 80°
Dimmable: Zigbee/ Bluetooth


1.0m	504.79/ 1262.92lx	2.00m/ 3.14sq.m
2.0m	126.20/ 315.73lx	4.00m/ 12.57sq.m
3.0m	56.09/ 140.32lx	6.00m/ 28.27sq.m
4.0m	31.55/ 78.93lx	8.00m/ 50.27sq.m
5.0m	20.19/ 50.52lx	10.00m/ 78.54sq.m
Height	Avg.Illum.E	Beam Angle: 80°
		Diameter/ Area



Optional Color




2ALGD0580025




2ALGD0580025-10W-L200/L300/L400/L500

POWER: 10W
CRI: ≥ 90
LUMEN: 911lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø34.5*H200mm
 Ø34.5*H300mm
 Ø34.5*H400mm
 Ø34.5*H500mm
BEAM ANGLE: 24°/38°/60°
Dimmable: Zigbee/ Bluetooth

1.0m	92.26/ 1393.77lx	3.46m/ 9.42sq.m
2.0m	23.07/ 348.44lx	6.93m/ 37.70sq.m
3.0m	10.25/ 154.80lx	10.39m/ 84.82sq.m
4.0m	5.77/ 87.11lx	13.86m/ 150.82sq.m
5.0m	3.69/ 55.75lx	17.32m/ 235.62sq.m




Optional Color






276



2ALGD0580039-8W-L200/L300

POWER: 8W
CRI: ≥ 90
LUMEN: 900lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H200mm
Ø45*H300mm
BEAM ANGLE: 15°/24°/38°
Dimmable: Zigbee/ Bluetooth

1.0m	270.07/ 2611.58lx	2.00m/ 3.14sq.m
2.0m	67.52/ 652.89lx	4.00m/ 12.57sq.m
3.0m	30.01/ 290.18lx	6.00m/ 28.27sq.m
4.0m	16.88/ 163.22lx	8.00m/ 50.27sq.m
5.0m	10.80/ 104.49lx	10.00m/ 78.54sq.m
Height	Avg. Ibeam, E	Beam Angle 90.0°
		Diameter Area



Optional Color



BK



WH



BK




WH






278




2ALGD0580060-8W

POWER: 8W
CRI: ≥ 80
LUMEN: 709Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø20*L1000mm
BEAM ANGLE: 360°
Dimmable: Zigbee/ Bluetooth



2ALGD0580060-12W

POWER: 12W
CRI: ≥ 80
LUMEN: 1072Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø20*L1500mm
BEAM ANGLE: 360°
Dimmable: Zigbee/ Bluetooth



2ALGD0580060-18W

POWER: 18W
CRI: ≥ 80
LUMEN: 2064Lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø20*L2000mm
BEAM ANGLE: 360°
Dimmable: Zigbee/ Bluetooth

Optional Color



WWW. REALIGHT.RS

**JURIJA GAGARINA 14M
11070 BELGRADE - SERBIA**

TEL +381 69 338 8123

OFFICE@REALIGHT.RS